



SPECIFICATION

Item no.:

T60404-N4646-X461

K-no.: 24620

100 A Current Sensor Module for 5V- Supply Voltage

For electronic current measurement:
 DC, AC, pulsed, mixed ..., with a galvanic
 isolation between primary circuit
 (short power) and secondary circuit
 (electronic circuit)

Date: 14.07.2014

Customer: Standard type

Customers Part no.:

Page 1 of 2

Description	Characteristics	Applications
<ul style="list-style-type: none"> Closed loop (compensation) Current Sensor with magnetic field probe Printed circuit board mounting Casing and materials UL-listed 	<ul style="list-style-type: none"> Excellent accuracy Very low offset current Very low temperature dependency and offset current drift Very low hysteresis of offset current Short response time Wide frequency bandwidth Compact design Reduced offset ripple 	<p>Mainly used for stationary operation in industrial applications:</p> <ul style="list-style-type: none"> AC variable speed drives and servo motor drives Static converters for DC motor drives Battery supplied applications Switched Mode Power Supplies (SMPS) Power Supplies for welding applications Uninterruptible Power Supplies (UPS)

Electrical data – Ratings

I _{PN}	Primary nominal r.m.s. current	100	A
V _{out}	Output voltage @ I _P	V _{Ref} ± (0.625*I _P /I _{PN})	V
V _{out}	Output voltage @ I _P =0, T _A =25°C	V _{Ref} ± 0.0025	V
V _{Ref}	External Reference voltage range	0...4	V
	Internal Reference voltage	2.5 ± 0.005	V
K _N	Turns ratio	1...3 : 1100	

Accuracy – Dynamic performance data

		min.	typ.	max.	Unit
I _{P,max}	Max. measuring range	±200			
X	Accuracy @ I _{PN} , T _A = 25°C		0.7		%
ε _L	Linearity		0.1		%
V _{out} - V _{Ref}	Offset voltage @ I _P =0, T _A = 25°C		±2.5		mV
Δ V _o / V _{Ref} / Δ V	Temperature drift of V _{out} @ I _P =0, T _A = -40...85°C	3	10		ppm/°C
t _r	Response time @ 90% von I _{PN}	500			ns
Δt (I _{P,max})	Delay time at di/dt = 100 A/μs	500			ns
f	Frequency bandwidth	DC...100			kHz

General data

		min.	typ.	max.	Unit
T _A	Ambient operating temperature	-40		+85	°C
T _s	Ambient storage temperature	-40		+85	°C
m	Mass		15		g
V _c	Supply voltage	4.75	5	5.25	V
I _c	Current consumption		16		mA
	Constructed and manufactured and tested in accordance with EN 61800-5-1 (Pin 1 - 6 to Pin 7 – 10) Reinforced insulation, Insulation material group 1, Pollution degree 2				
S _{clear}	Clearance (component without solder pad)	10.2			mm
S _{creep}	Creepage (component without solder pad)	10.2			mm
V _{sys}	System voltage overvoltage category 3		600		V _{RMS}
V _{work}	Working voltage (table 7 acc. to EN61800-5-1) overvoltage category 2		1020		V _{RMS}
U _{PD}	Rated discharge voltage		1400		V _P

Max. potential difference acc. to UL 508	RMS	600	V _{AC}
--	-----	-----	-----------------

Date	Name	Issue	Amendment
14.07.14	DJ	84	Sensor optimised. Marking updated. CN-981
25.04.13	KRe	83	Mechanical outline: marking with UL-sign and max potential difference added. CN-666
Hrsg.: KB-E editor	Bearb: Le designer	KB-PM: Ga. check	freig.: HS released

Copying of this document, disclosing it to third parties or using the contents there for any purposes without express written authorization by use illegally forbidden
 Any offenders are liable to pay all relevant damages.

K-no.: 24620

100 A Current Sensor Module for 5V- Supply Voltage

For electronic current measurement:
DC, AC, pulsed, mixed ..., with a galvanic
isolation between primary circuit
(short power) and secondary circuit
(electronic circuit)

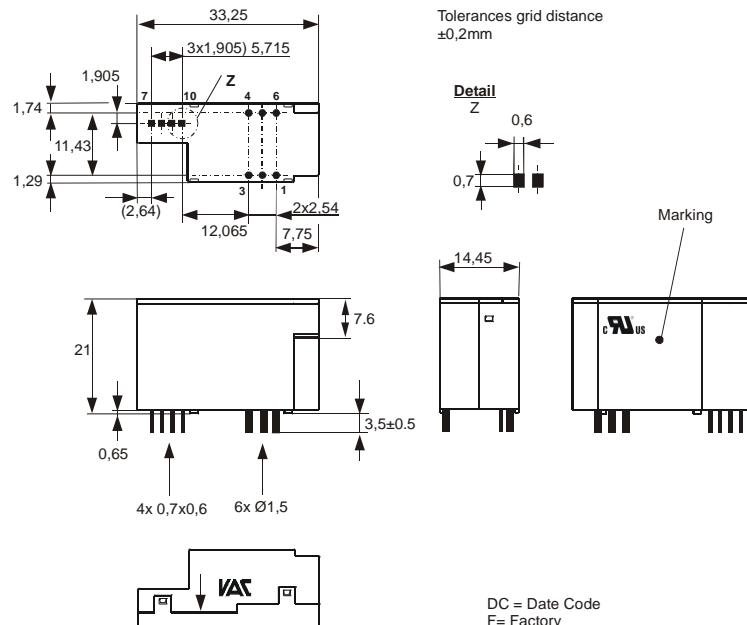
Date: 14.07.2014

Customer: Standard type


Customers Part no.:
Page 2 **of** 2

Mechanical outline (mm):

General tolerances DIN ISO 2768-c


Tolerances grid distance
±0.2mm

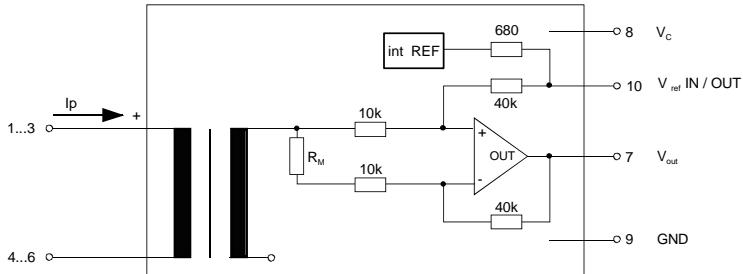
Detail


Connections:

1...6: Ø 1.5 mm
7..10: 0.7*0.6 mm

Marking:

UL-sign
4646-X461
F DC

Schematic diagram

Possibilities of wiring (@ T_A = 85°C)

primary windings	primary current RMS	primary current maximal	output current RMS	turns ratio	primary resistance	wiring
N _P	I _P [A]	I _{P,max} [A]	I _s (I _P) [mA]	K _N	R _P [mΩ]	
1	100	±200	2.5±0.625	1:1100	0.1	
2	50	±100	2.5±0.625	2:1100	0.45	
3	33.3	±66	2.5±0.625	3:1100	1	

Temperature of the primary conductor should not exceed 100°C.

Additional information is obtainable on request.

This specification is no declaration of warranty acc. BGB §443.

Hrsg.: KB-E
editor

Bearb: Le
designer

KB-PM: Ga.
check

freig.: HS
released



Additional Information

Item No.: T60404-N4646-X461

K-No.: 24620

100 A Current Sensor Module for 5V- Supply Voltage

For the electronic measurement of currents:
DC, AC, pulsed, mixed ..., with a galvanic
Isolation between the primary circuit
(high power) and the secondary circuit

Date: 14.07.2014

Customer:

Customers Part No.:

Page 1 of 2

Electrical Data

		min.	typ.	max.	Unit
V_{Ctot}	Maximum supply voltage (without function)			6	V
I_C	Supply Current with primary current		$16\text{mA} + I_p \cdot K_N + V_{out}/R_L$		mA
$I_{out,SC}$	Short circuit output current		± 20		mA
R_P	Resistance / primary winding @ $T_A=25^\circ\text{C}$			0.3	$\text{m}\Omega$
R_S	Secondary coil resistance @ $T_A=85^\circ\text{C}$			15	Ω
$R_{i,Ref}$	Internal resistance of Reference input		670		Ω
$R_i(V_{out})$	Output resistance of V_{out}			1	Ω
R_L	External recommended resistance of V_{out}	1			$\text{k}\Omega$
C_L	External recommended capacitance of V_{out}		500		pF
$\Delta X_{Ti} / \Delta V$	Temperature drift of X @ $T_A = -40 \dots +85^\circ\text{C}$			40	ppm/K
$\Delta V_0 = \Delta(V_{out} - V_{Ref})$	Sum of any offset drift including:	2	6		mV
V_{ot}	Longterm drift of V_0	1			mV
V_{0T}	Temperature drift von V_0 @ $T_A = -40 \dots +85^\circ\text{C}$	1			mV
V_{0H}	Hystereses of V_{out} @ $I_p=0\text{A}$ (after an overload of $10 \times I_{PN}$)		0.5		mV
$\Delta V_0/\Delta V_C$	Supply voltage rejection ratio		1		mV/V
V_{oss}	Offsetripple (with 1 MHz- filter first order)		21		mV
V_{oss}	Offsetripple (with 100 kHz- filter first order)	3.5	6		mV
V_{oss}	Offsetripple (with 20 kHz- filter first order)	1	1.5		mV
C_k	Maximum possible coupling capacity (primary – secondary)	5			pF
	Mechanical stress according to M3209/3			30g	
	Settings: 10 – 2000 Hz, 1 min/Oktave, 2 hours				

Inspection (Measurement after temperature balance of the samples at room temperature, SC = significant characteristic)

V_{out} (SC)	(V)	M3011/6:	Output voltage vs. reference ($I_p=3 \times 10\text{A}_{\text{Peak}}$, 40-80Hz)	$625 \pm 0.7\%$	mV
$V_{out}-V_{Ref}$	(V)	M3226:	Offset voltage ($I_p=0\text{A}$)	± 0.0025	V
V_d	(V)	M3014:	Test voltage, 1 s pin 1 – 6 vs. pin 7 – 10	2.5	kV_{RMS}
V_e	(AQL 1/S4)		Partial discharge voltage acc.M3024 with V_{vor}	1500 1875	V_{RMS} V_{RMS}

Type Testing (Pin 1 - 6 to Pin 7 – 10)

V_W	HV transient test according to M3064 (1,2 μs / 50 μs -wave form)	8	kV	
V_d	Testing voltage to M3014	(5 s)	5	kV
V_e	Partial discharge voltage acc.M3024 with V_{vor}		1500 1875	V_{RMS} V_{RMS}

Applicable documents

Current direction: A positive output current appears at point V_{out} , by primary current in direction of the arrow.

Further standards UL 508 ; file E317483, category NMTR2 / NMTR8

Enclosures according to IEC529: IP50.

Date	Name	Issue	Amendment			
14.07.14	DJ	84	Sensor optimised. CN-998			
25.04.13	KRe	83	Applicable documents: further standards added. CN-666			
Hrsg.: KB-E editor	Bearb: DJ designer		KB-PM: Ga. check			freig.: HS released

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zu widerhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung oder GM-Eintragung vorbehalten

Copying of this document, disclosing it to third parties or using the contents there for any purposes without express written authorization by use illegally forbidden.
Any offenders are liable to pay all relevant damages.