


ROHS COMPLIANT

PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	DCN 42213	4/16	DAL

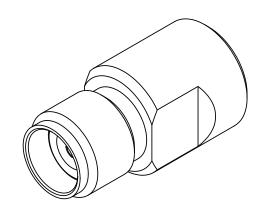

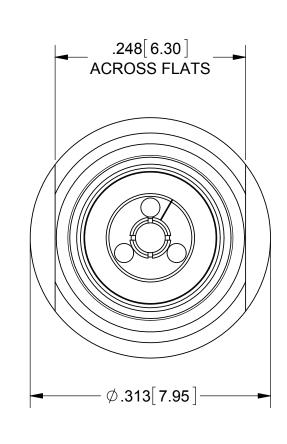

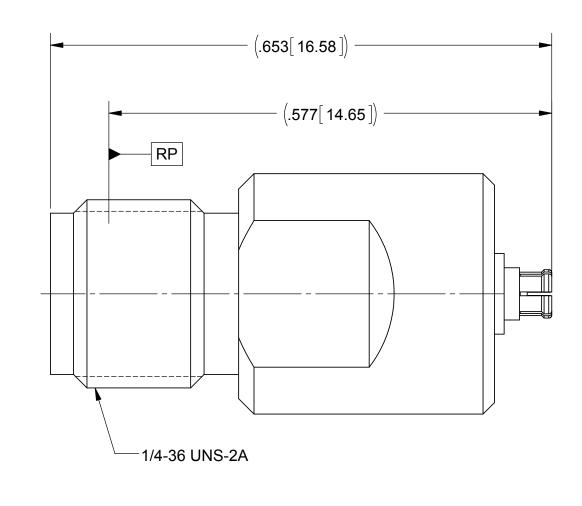

UNLESS OTHERWISE SPECIFIED

MATERIAL:

OUTER BODY &

SLEEVE:

STAINLESS STEEL PER AMS-5640, ALLOY UNS \$30300, TYPE 1; OR ASTM A582

TYPE 303, COND A

SMPS BODY & CONTACT:

BERYLLIUM COPPER PER ASTM B196,

ALLOY No. UNS C17300, TD04

SVK BEAD: **ULTEM 1000**

FINISH:

OUTER BODY &

SLEEVE: PASSIVATED PER AMS-2700

SMPS BODY & CONTACT:

GOLD PER ASTM B488, TYPE II, CODE C, CLASS 1.27, OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN.

PERFORMANCE:

IMPEDANCE: 50 OHMS

DC TO 40.0 GHz. FREQ. RANGE:

MATERIAL:	SEE NOTES		
FINISH:	SEE NOTES		
SURFACE ARI	SURFACE AREA: N/A		
	PROPRIETARY		
IS THE SOLE PI ANY REPRODU WITHOUT THE	TION CONTAINED IN THIS DRAWING ROPERTY OF SV MICROWAVE, INC. ICTION IN PART OR AS A WHOLE WRITTEN PERMISSION OF IE, INC IS PROHIBITED.		

	DIMENSIONS ARE IN INCHES TOLERANCES:
_	FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' +15'
	DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005
	INTERPRET DIMENSIONS AND TOLERANCES

FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' ±15' DECIMAL: .X ±.030	1) ALL DIMENSIONS ARE IN 2) ALL DIMENSIONS ARE AF 3) BREAK CORNERS & ED 4) CHAM. 1ST & LAST THRE 5) SURFACE ROUGHNESS (6) DIA: S ON COMMON CEN' WITHIN .005 T.I.R. 7) REMOVE ALL BURRS	TER PLATING. ES .005 R. MAX. ADS. 33 ₆ MIL-STD-10.
THIRD ANGLE PROJECTION	DRAWN:	GPF 4/1/16

RD ANGLE PROJECTION	DRAWN:	GPF 4/1/16
	CHECKED:	DAL 4/1/16
\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	APPROVED:	DAL 4/1/16



SMPS FEMALE TO SVK FEMALE ADAPTER

SIZE B	95077	DWG. NO. 1138-	6009
SCALE: 8:1			SHEET 1 OF 1