

# Through the Roller Sensor Family



## Datasheet




- Reliable leading edge detection of letters, thin packages, poly bags, totes, boxes or other product on roller conveyors
- Mounts between conveyor roller gap to standard hex or round side rail holes with no extra hardware required or on the T-Slot with customer supplied bracket and hardware
- Spring loaded end caps reduce installation and alignment time for reduced labor costs
- Built to order with specified length and beam spacing: 200 mm to up to 1500 mm (8 in to up to 59 in) depending on mounting configuration, with 2 to 10 sensors for maximum flexibility
- Robust aluminum housing, ambient light and ESD resistance for enhanced durability



### WARNING:

- **Do not use this device for personnel protection**
- Using this device for personnel protection could result in serious injury or death.
- This device does not include the self-checking redundant circuitry necessary to allow its use in personnel safety applications. A device failure or malfunction can cause either an energized (on) or de-energized (off) output condition.

## Models

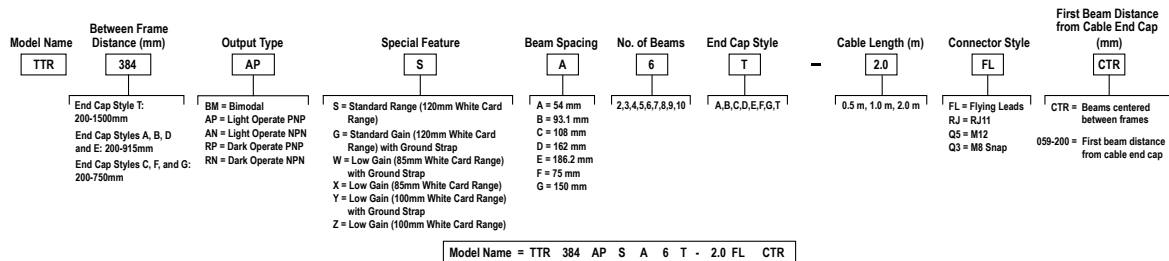

**Note:** For definition of the End Cap Styles, see [Table 1](#) on page 2.



**Note:** Sensors with more than 7 beams have higher minimum supply voltage requirements, see [Specifications](#) on page 5.

## Configurations

Figure 1. Spring End Cap Configuration



Figure 2. T-Slot Configuration

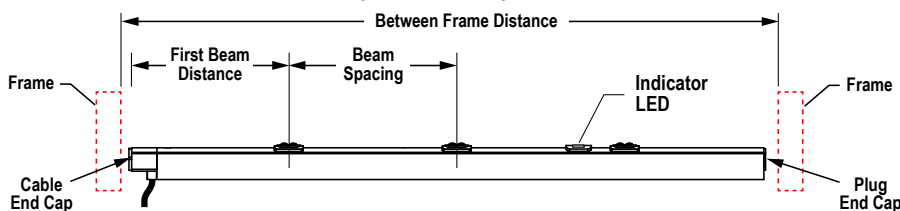


Figure 3. Adhesive End Cap Configuration



Table 1: End Cap Styles

| End Cap Style |   | End 1 |   | End 2 |
|---------------|---|-------|---|-------|
| A             | 11 mm Hex, flat side up   |       | Spring 11 mm hex / 8 mm round                           |       |
| B             | 11 mm Hex, point up   |       | Spring 11 mm hex / 8 mm round                           |       |
| C             | Adjustable 11 mm Hex, can be positioned in 10 degree increments                           |       | Spring 11 mm hex / 8 mm round                           |       |
| D             | 11 mm Hex, flat side up   |       | Spring 8 mm round                                       |       |
| E             | 11 mm Hex, point up   |       | Spring 8 mm round                                       |       |
| F             | Adjustable 11 mm Hex, can be positioned in 10 degree increments                           |       | Spring 8 mm round                                       |       |
| G             | Adjustable 11 mm Hex, can be positioned in 10 degree increments / adhesive backed bracket |       | Spring 11 mm hex / 8 mm round / adhesive backed bracket |       |
| T             | 11 mm Hex, flat side up   |       | Plug  |       |





**Note:** T-Slot mounted sensors with the T End Cap Style are 6 mm shorter than the specified Between Frame Distance.

## Wiring

### Bimodal Output Wiring Diagrams




### Fixed NPN and PNP Output Wiring Diagrams: Light and Dark Operate by Model Number

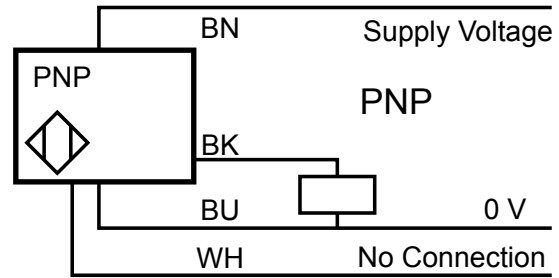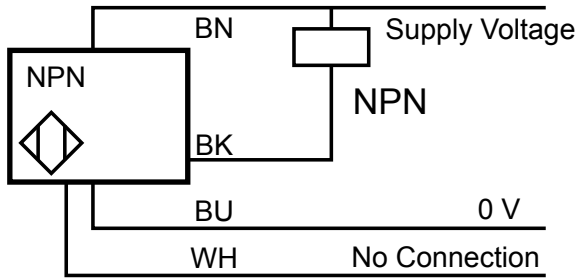

### RJ-11 Pinout


### RJ-11 Key

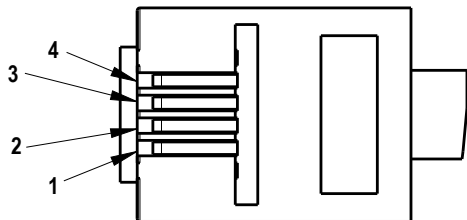

1. Brown
2. Black
3. White
4. Blue

### M12 Pinout

### M12 Key



1. Brown
2. White
3. Blue
4. Black

**M8 Snap Connector Pinout**

**M8 Key**




- 1. Brown
- 2. White
- 3. Blue
- 4. Black

Installation

Mounting Considerations

**Conveyor Side View**

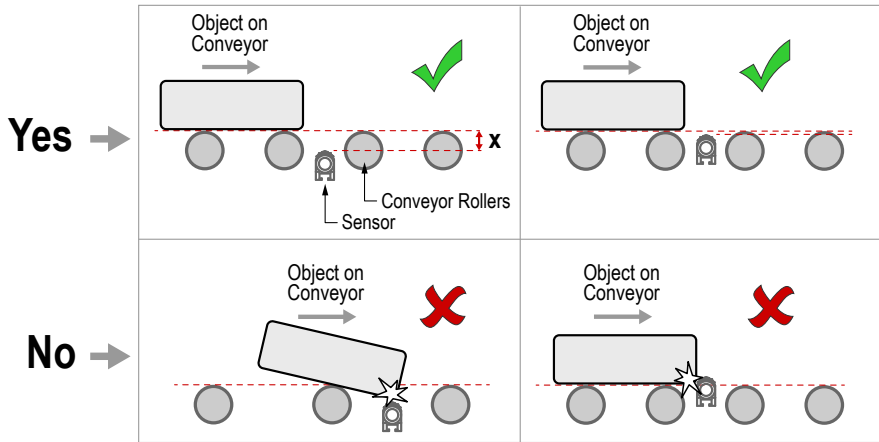

T-Slot Installation



## Specifications

### Supply Voltage

| Number of Sensing Beams | Supply Voltage with 10% Maximum Ripple |
|-------------------------|--|
| 2, 3, 4, 5, 6, 7        | 18 V DC to 30 V DC                     |
| 8                       | 22 V DC to 30 V DC                     |
| 9                       | 24 V DC to 30 V DC                     |
| 10                      | 26 V DC to 30 V DC                     |

Use only with a suitable Class 2 power supply (UL) or SELV power supply (CE)

### Supply Current

45 mA

### Supply Protection Circuitry

Protected against reverse polarity and transient voltages

### Wavelength

Infrared LED, 940 nm

### Output Response

1 ms on/off

### Output Configuration

Rating: 100 mA max output at 25 °C  
 Output Voltage High: Greater than Vsupply – 2.5 V  
 Output Voltage Low: Less than 2.5 V  
 For loads less than 1 Meg Ohm  
 Protected against false pulse on power-up and continuous overload or short-circuit of output

### Indicators

Amber on: Light sensed

### Sensing Mode

Diffuse, Infrared, 940 nm

### Range

| Special Feature Type | Range          |               |                |
|----------------------|----------------|---------------|----------------|
|                      | 90% White Card | 18% Gray Card | 6% Black Card  |
| S and G              | 0 to ≥ 120 mm  | 0 to ≥ 50 mm  | ≤ 3 to ≥ 30 mm |
| Y and Z              | 0 to ≥ 100 mm  | 0 to ≥ 40 mm  | ≤ 4 to ≥ 25 mm |
| W and X              | 0 to ≥ 85 mm   | 0 to ≥ 35 mm  | ≤ 6 to ≥ 20 mm |

### Operating Conditions

-10 °C to +55 °C (+14 °F to +131 °F)

### Environmental Rating

IP50

### Vibration and Mechanical Shock

All models meet IEC 60068-2-6, IEC 60947-5-2, UL491 Section 40, MIL-STD-202F, Method 201A (Vibration: 10 Hz to 60 Hz, 0.5 mm peak-to-peak)  
 Shock: 30G 11 ms duration, half sine wave per IEC 60068-2-27

### Cable

Minimum static bend radius: 20 mm  
 Flex life > 10,000 cycles at flexing bend radius > 40 mm

### Certifications



**Banner Engineering Europe** Park Lane,  
 Culliganlaan 2F bus 3, 1831 Diegem,  
 BELGIUM



**Turck Banner LTD** Blenheim House,  
 Blenheim Court, Wickford, Essex SS11  
 8YT, Great Britain



IND. CONT. EQ.  
 E224071

## Performance Curves



**Note:** The Beam Pattern and Excess Gain performance curve diagrams represent the Standard Gain (Special Feature S and G) models.

