

# Ultrasonic Diffuse, Analogue Output Types UA18ESD.....TI

CARLO GAVAZZI



- Cylindrical M18 Stainless Steel housing INOX AISI 316L
- Sensing distance: 40-800 mm
- Power supply: 10-30 VDC
- Outputs: 0-10 VDC or 4-20 mA
- Linearity error 1%
- Repeatability 1%
- Beam angle,  $\pm 7^\circ$  or  $\pm 8^\circ$
- Protection: Short-circuit and overvoltage
- Protection degree IP 67
- 2 m cable or M12 plug



## Product Description

A family of diffuse ultrasonic sensors in stainless steel housing and with a sensing range of 40-300 mm and 80-800 mm with a resolution as low as 3.0 mm. The sensor contains an analogue output that is either 0-10 V or 4-20 mA.

This sensor is the ideal choice for distance measurement, level measurement, diameter measurement or loop control. Due to the use of micro-processor control the digital filtering makes the sensor immune to most electromagnetic interferences.

## Ordering Key

**UA18ESD08AGM1TI**

|                      |       |
|----------------------|-------|
| Ultrasonic sensor    | _____ |
| Housing style        | _____ |
| Housing size         | _____ |
| Housing material     | _____ |
| Housing length       | _____ |
| Detection principle  | _____ |
| Sensing distance     | _____ |
| Output type          | _____ |
| Output configuration | _____ |
| Connection           | _____ |
| Teach-in             | _____ |

## Type Selection

| Housing diameter | Connection | Rated operating dist. (S <sub>n</sub> ) | Analogue Output | Ordering no.                 |
|------------------|------------|---|-----------------|------------------------------|
| M18              | Plug M12   | 40-300 mm                               | 4-20 mA         | <b>UA 18 ESD 03 AG M1 TI</b> |
| M18              | Cable      | 40-300 mm                               | 4-20 mA         | <b>UA 18 ESD 03 AG TI</b>    |
| M18              | Plug M12   | 40-300 mm                               | 0-10 V          | <b>UA 18 ESD 03 AK M1 TI</b> |
| M18              | Cable      | 40-300 mm                               | 0-10 V          | <b>UA 18 ESD 03 AK TI</b>    |
| M18              | Plug M12   | 80-800 mm                               | 4-20 mA         | <b>UA 18 ESD 08 AG M1 TI</b> |
| M18              | Cable      | 80-800 mm                               | 4-20 mA         | <b>UA 18 ESD 08 AG TI</b>    |
| M18              | Plug M12   | 80-800 mm                               | 0-10 V          | <b>UA 18 ESD 08 AK M1 TI</b> |
| M18              | Cable      | 80-800 mm                               | 0-10 V          | <b>UA 18 ESD 08 AK TI</b>    |

## Specifications

|   |  |  |                                |
|---|--|--|--------------------------------|
| <b>Rated operating distance (S<sub>n</sub>)</b> | Reference target: 1 mm metal rolled finish<br>100 x 100 mm<br>40 - 300 mm<br>80 - 800 mm | <b>Temperature drift</b>                         | 0.1%/°C @ -20° to +60° C       |
| UA18ESD03<br>UA18ESD08                          |  | <b>Temperature compensation</b>                  | Yes                            |
| <b>Blind zone</b>                               | ≤ 40 mm<br>≤ 80 mm   | <b>Hysteresis (H)</b>                            | Min. 1%                        |
| UA18ESD03...<br>UA18ESD08...                    |  | <b>Rated operational voltage (U<sub>B</sub>)</b> | 10-30 VDC<br>(ripple included) |
| <b>Repeatability</b>                            | 1%   | <b>Ripple (U<sub>ripple</sub>)</b>               | ≤ 5%                           |
| <b>Linear Accuracy</b>                          | 1%   | <b>No-load supply current (I<sub>0</sub>)</b>    | 35 mA @ U <sub>B</sub> max     |
| <b>Beam angle</b>                               | 7 ± 2°<br>8 ± 2°   | <b>Protection analogue output</b>                | Short-circuit and overvoltage  |
| UA18ESD03...<br>UA18ESD08...                    |  | <b>Output analogue output</b>                    | AG.. types<br>AK.. types       |
| <b>Adjustment</b>                               | P1 (farthest setpoint)<br>P2 (nearest setpoint)  | <b>Load</b>                                      | 4 to 20 mA<br>0 to 10 VDC      |
| Teach by wire                                   |  |  | max. 500 Ω<br>min. 3 kΩ        |
| <b>Resolution</b>                               | 3 mm   |  |                                |





## Specifications (cont.)


|                                      |   |
|--------------------------------------|---|
| <b>Carrier frequency</b>             | 300 kHz   |
| <b>Response time analogue output</b> | ≤ 400 mS  |
| <b>Power ON delay</b>                | ≤ 900 mS  |
| <b>Output switching function</b>     | Analogue output with positive or negative slope |
| <b>Indication</b>                    |   |
| Output ON                            | Yellow LED                                      |
| Echo ON                              | Green LED                                       |
| <b>Environment</b>                   |   |
| Installation category                | III (IEC 60664/60664A; 60947-1)                 |
| Pollution degree                     | 3 (IEC 60664/60664A; 60947-1)                   |
| Degree of protection                 | IP67 (IEC 60529; 60947-1)                       |
| <b>Ambient temperature</b>           |   |
| Operating                            | -20° to +60°C (-4° to +140°F)                   |
| Storage                              | -35° to +70°C (-31° to +158°F)                  |
| <b>Vibration</b>                     | 10 to 55 Hz, 1.0 mm/6g (IEC/EN 60068-2-6)       |

|                                 |   |
|---------------------------------|---|
| <b>Shock</b>                    | 30 g / 11 mS, 3 directions (IEC/EN 60068-2-27)        |
| <b>Rated insulation voltage</b> | < 500 VAC (rms)                                       |
| <b>Housing</b>                  |   |
| Material body                   | AISI 316L stainless steel                             |
| Material front                  | Epoxy-glass resin                                     |
| Material back, plug             | Grilamid  |
| Material back, cable            | Grilamid  |
| Material sealing front          | TPE   |
| <b>Connection</b>               |   |
| Cable                           | PVC, grey, 2 m, 4 x 0.32 mm <sup>2</sup> , Ø = 4.7 mm |
| Plug                            | M12, 4-pin (CON. 14-series)                           |
| <b>Tightening torque</b>        | ≤ 50 Nm   |
| <b>Weight</b>                   |   |
| Cable version                   | 160 g   |
| Plug version                    | 85 g  |
| <b>CE-marking</b>               | Yes   |
| <b>Approvals</b>                | cULus (UL508)   |


## Detection Range

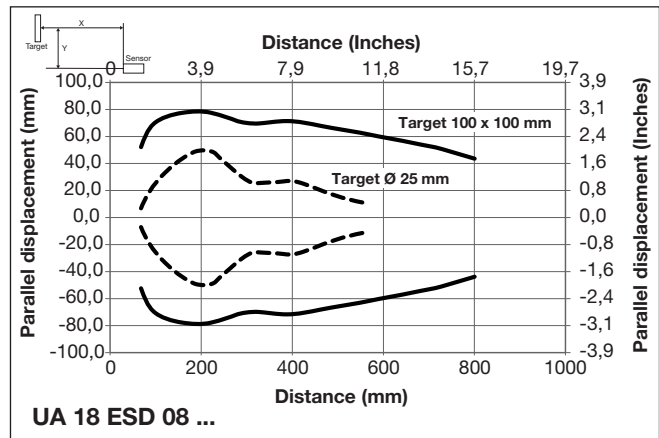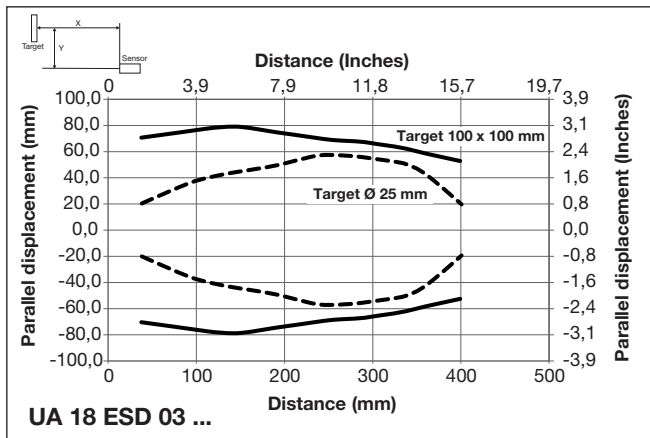

## Wiring Diagram

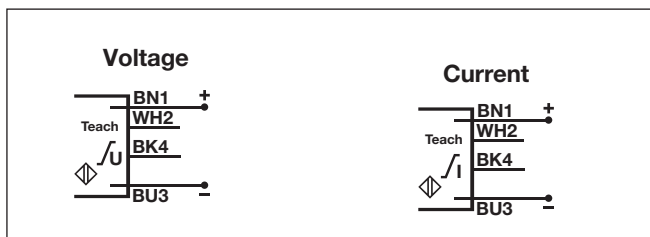

## Dimensions

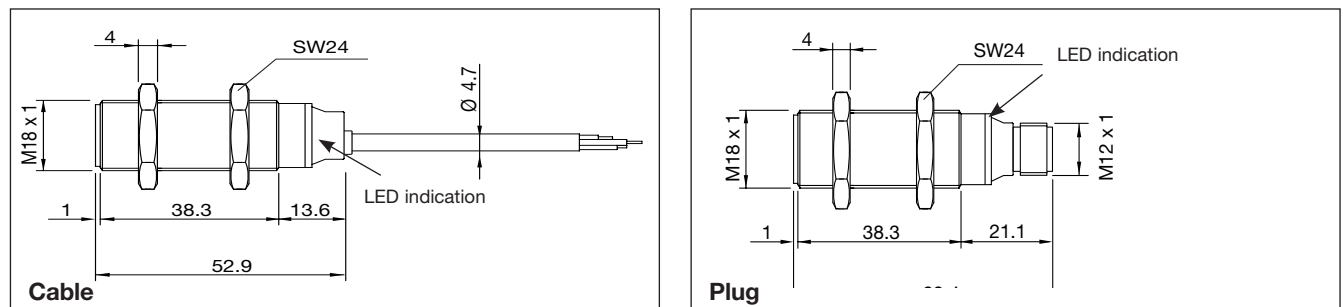

## Programming set-up

### Teach-in by wire adjustment options

In the following, “**Activate Teach**” means:  
Connect the white wire to GND (Blue wire)

Two Teach-in adjustment options are available:

#### 1) Window Teach-in Option (adjustment of two points: P1 and P2)

##### Teach-in of set point P1:

- Place the target at the selected far distance P1 - the green Echo LED is ON
- “Activate Teach” shortly
- Setpoint P1 has been stored and the sensor is still in teach mode
- The orange LED will continue flashing rapidly with a frequency of 2 Hz until the setpoint P2 has been learned

##### Teach-in of set point P2:

- Place the target at the selected close distance P2 - the green Echo LED is still ON
- “Activate Teach” shortly
- The green LED switch OFF and the orange LED will flash 5 times with a frequency of 2,5 Hz
- Setpoint P2 has been stored.
- The sensor is in normal mode and the green and yellow LEDs are steady.

#### 2) Target adjustment on P1 only (Minimum P2 distance)

##### Teach-in of set point P1:

- Place the target at the selected far distance P1 - the green Echo LED is ON
- “Activate Teach” shortly
- Setpoint P1 has been stored and the sensor is still in teach mode
- The orange LED will continue flashing rapidly with a frequency of 2 Hz until setpoint P2 has been learned
- Without moving the target
- “Activate Teach” shortly
- The green LED switches OFF and the orange LED will flash 5 times with a frequency of 2,5 Hz
- Setpoint P2 has been stored at the minimum distance
- The sensor is in normal mode and the green and yellow LEDs are steady