


Power Relay F7

- Pin assignment similar to ISO 7588 part 1
- Customized versions on request
 - 24VDC versions with contact gap >0.8mm
 - Integrated components (e.g. resistor, diode)
 - Customized marking/color
 - Special covers (e.g. notches, release features, brackets)

Typical applications

Cross carline up to 70A for example: ABS control, cooling fan, energy management, engine control, glow plug, heated front screen, ignition, lamps: front, rear, fog light, main switch/supply relay.

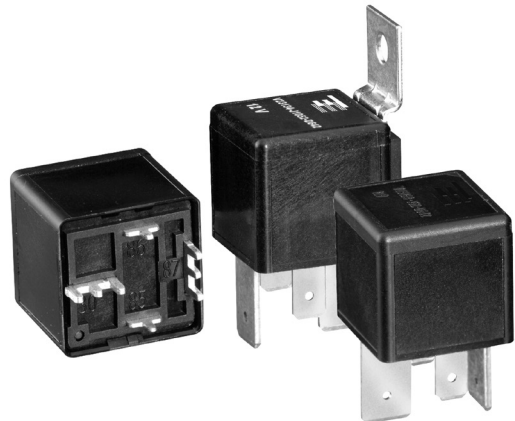

F134J_a_bw

Contact Data

| | | | |
|---|--|---|--------------------------------|
| Contact arrangement | 1 form A, 1 NO | 1 form A, 1 NO | 1 form A, 1 NO |
| Contact gap | – | – | >0.8mm |
| Rated voltage | 12VDC | 24VDC | 24VDC ¹⁾ |
| Limiting continuous current | | | |
| 23°C | 70A | 70A | 70A |
| 85°C | 50A | 50A | 50A |
| 125°C | 30A | 30A | 30A |
| Limiting making current ²⁾ | 240A | 240A | 240A |
| Limiting breaking current | 70A | 25A | 40A |
| Limiting short-time current overload current, ISO 8820-3 ³⁾ | | 1.35 x 50A, 1800s 2.00 x 50A, 5s 3.50 x 50A, 0.5s 6.00 x 50A, 0.2s | |
| Jump start test, ISO 16750-1 | | 24VDC for 5min, conducting nominal current at 23°C | |
| Contact material | | Silver based | |
| Min. recommended contact load ⁴⁾ | | 1A at 5VDC | |
| Initial voltage drop, form A (NO) contact at 10A, typ./max. | | 10/300mV | |
| Frequency of operation at nominal load | | 6 ops./min (0.1Hz) | |
| Operate/release time typ. | | 7/2ms ⁵⁾ | |
| Electrical endurance ⁶⁾ | | | |
| resistive load at 14VDC | >1x10 ⁵ ops. 70A >2x10 ⁵ ops. 50A | – | – |
| resistive load at 28VDC | – | >1x10 ⁵ ops. 25A | >1x10 ⁵ ops. 40A |

Contact Data (continued)

- Mechanical endurance >1x10⁶ops.
- 1) Special high performance 24VDC version with contact gap >0.8mm.
 - 2) The values apply to a resistive or inductive load with suitable spark suppression and at maximum 14VDC for 12VDC or 28VDC for 24VDC load voltages. For a load current duration of maximum 3s for a make/break ratio of 1:10.
 - 3) Current and time are compatible with circuit protection by a typical automotive fuse. Relay will make, carry and break the specified current.
 - 4) See chapter Diagnostics of Relays in our Application Notes or consult the internet at <http://relays.te.com/appnotes/>
 - 5) For unsuppressed relay coil. Any parallel device to the coil will increase the release time.
 - 6) Electrical endurance data is not valid for diode versions. Any diode or pn-junction parallel to the coil (internal or external) will significantly decrease the electrical lifetime, especially when used for inductive loads.

Coil Data

| | |
|--------------------|--------------|
| Rated coil voltage | 12VDC, 24VDC |
|--------------------|--------------|


Coil versions, DC coil

| Coil code | Rated voltage VDC | Operate voltage VDC | Release voltage VDC | Coil resistance ⁷⁾ Ω±10% | Rated coil power ⁷⁾ W |
|-----------|-------------------|---------------------|---------------------|-------------------------------------|----------------------------------|
| 052 | 12 | 7.2 | 1.6 | 90 | 1.6 |
| 053 | 24 | 14.4 | 3.2 | 324 | 1.8 |
| 056 | 24 | 16.0 | 4.0 | 268 | 2.1 |
| 065 | 24 | 14.4 | 2.4 | 288 | 2.0 |
| 165 | 24 | 16.0 | 4.0 | 288 | 2.0 |

7) Without components in parallel.


All figures are given for coil without pre-energization, at ambient temperature +23°C.

Max. DC load breaking capacity

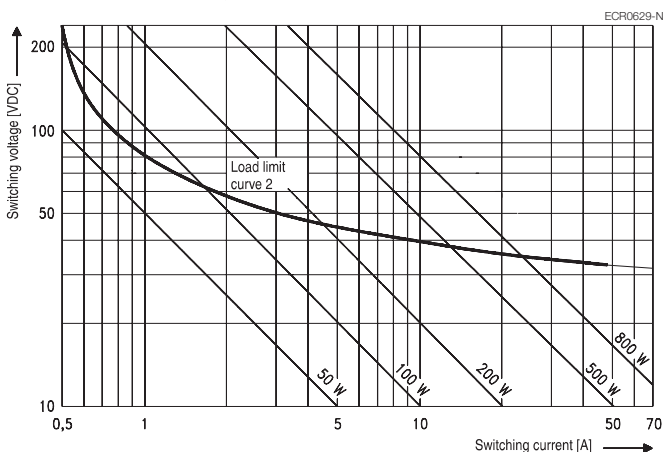

Load limit curve: safe shutdown, no stationary arc/make contact.
Load limit curve measured with low inductive resistors verified for 1000 switching events.

Coil operating range

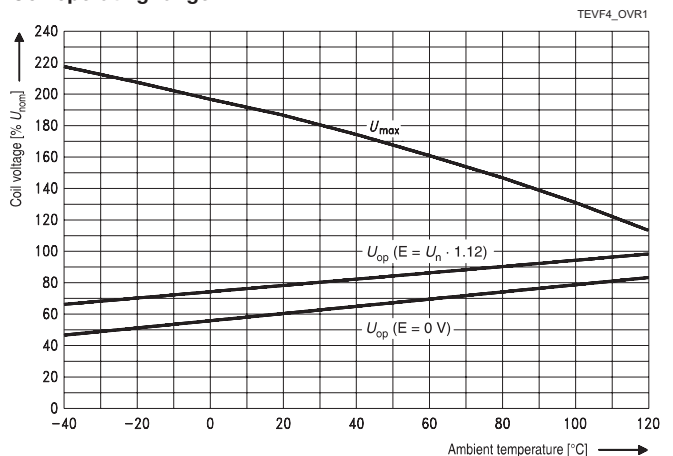

Does not take into account the temperature rise due to the contact current
E = pre-energization.

Power Relay F7 (Continued)

Insulation Data

| | |
|----------------------------------|--------------------------|
| Initial dielectric strength | |
| between open contacts | 500V _{rms} |
| between contact and coil | 500V _{rms} |
| between adjacent contacts | 500V _{rms} |
| Load dump test | |
| ISO 7637-1 (12VDC), test pulse 5 | V _s =+86.5VDC |
| ISO 7637-2 (24VDC), test pulse 5 | V _s =+200VDC |

Other Data

| | |
|--|--|
| EU RoHS/ELV compliance | compliant |
| Protection to heat and fire according UL-94 | HB or better ⁸⁾ |
| Ambient temperature | -40 to 125°C |
| Climatic cycling with condensation EN ISO 6988 | 6 cycles, storage 8/16h |
| Temperature cycling, IEC 60068-2-14, Nb | 10 cycles, -40/+85°C (5°C/min) |
| Damp heat cyclic, IEC 60068-2-30, Db, Variant 1 | 6 cycles, upper air temp. 55°C |
| Damp heat constant, IEC 60068-2-3, Ca | 56 days |
| Category of environmental protection, IEC 61810 | RTI – dustproof |
| Degree of protection, IEC 60529 | IP54 (dustproof) |
| Corrosive gas | |
| IEC 60068-2-42 | 10±2cm ³ /m ³ SO ₂ , 10 days |
| IEC 60068-2-43 | 1±0.3cm ³ /m ³ H ₂ S, 10 days |
| Vibration resistance (functional) | |
| IEC 60068-2-6 (sine sweep) | 10 to 500Hz, min. 5g ⁹⁾ |

Other Data (continued)

| | |
|----------------------------------|------------------------------|
| Shock resistance (functional) | |
| IEC 60068-2-27 (half sine) | 6ms, min. 30g. ⁹⁾ |
| Drop test, free fall | |
| IEC 60068-2-32 | 1m onto concrete |
| Terminal type | plug-in, QC/ PCB |
| Cover retention | |
| pull force | 150N |
| push force | 200N |
| Terminal retention | |
| pull force | 150N |
| push force | 150N |
| resistance to bending | 10N ¹⁰⁾ |
| force applied to side | 10N ¹⁰⁾ |
| torque | 0.3Nm |
| Weight | approx. 38g (1.3oz) |
| Resistance to soldering heat THT | |
| IEC 60068-2-20 | 260°C, 10s |
| Packaging unit | |
| plug-in: | 210 pcs. |
| plug-in with bracket: | 208 pcs. |
| PCB | 315 pcs. |

8) Refers to used materials.

9) No change in the switching state >10µs. Valid for NC contacts, NO contact values significantly higher.


10) Values apply 2mm from the end of the terminal. When the force is removed, the terminal must not have moved by more than 0.3mm.

Accessories

For details see datasheet

Connectors for Maxi ISO Relays

Terminal Assignment

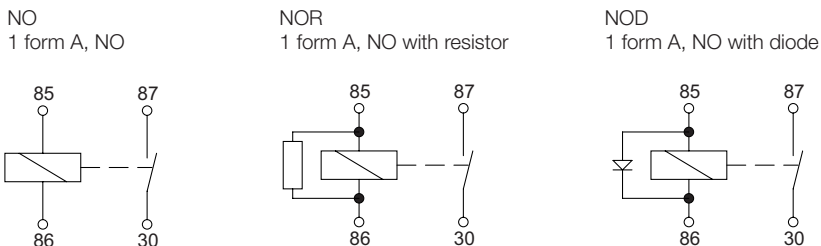

Dimensions

Power Relay F7 with quick connect terminals similar to ISO 8092-1

View of the terminals (bottom view)

