

**Description:** 

2.5-2.69GHz Ceramic SMT Antenna

PART NUMBER: W3020

# **Series: Ceramic Chip**









### Features:

- Omnidirectional radiation
- Low profile
- Compact size:
  W x L x H (3.2 x1.6 x 1.1mm)
- · Fully SMD compatible
- · Lead free soldering compatible
- Tape and reel packing
- RoHS compliant
- Moisture Sensitivity Level MSL3

## **Applications:**

- 2.5-2.69 GHz Radios
- LTE B38, B41
- Devices needing smallest form factor high performing miniature antenna

All dimensions are in mm / inches

Issue: 1821

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34<sup>th</sup> St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551

Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4<sup>th</sup> Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



**Description:** 

2.5-2.69GHz Ceramic SMT Antenna

PART NUMBER: W3020

# **Series: Ceramic Chip**

### **ELECTRICAL SPECIFICATIONS**

Frequency 2.5-2.69 GHz

Nominal Impedance  $50 \Omega$ 

Return Loss(Typical)\* <-5.5dB

Max Gain\* 2.9dBi (Peak)

1.5dBi (Band Edges)

Radiation Efficiency\* 89%/-0.52dB (Peak)

72%/-1.43dB(Band Edges)

Note: Electrical characteristics depend on test board (GP) size and antenna positioning on GP and Ground Clearance area size.

\*Tested on PULSE test board position 1 (refer to page 10) . The testboard size 80x35 mm, PCB ground clearance area 4.0 x 6.25 mm. 1.0pF shunt matcing capacitor used.

Issue: 1821



**Description:** 

2.5-2.69GHz Ceramic SMT Antenna

PART NUMBER: W3020

# **Series: Ceramic Chip**

## **MECHANICAL SPECIFICATIONS**

Weight 0.033 g

Size 3.2 x1.6 x 1.1mm

### **ENVIRONMENTAL SPECIFICATIONS**

Operating temperature -40~+85° C

Temperature -40~+85° C

Humidity Cyclic 6 +25° C/+55° C 95%

Vibration

Sinusoidal 2-8Hz 7.5 mm

Sinusoidal 8-200Hz 20 m/s<sup>2</sup>

Shocks 0.5 m/s

Salt mist 96 hours






# **Description:**

2.5-2.69GHz Ceramic SMT Antenna

**PART NUMBER: W3020** 

### MECHANICAL DRAWING AND TERMINAL CONFIGURATION

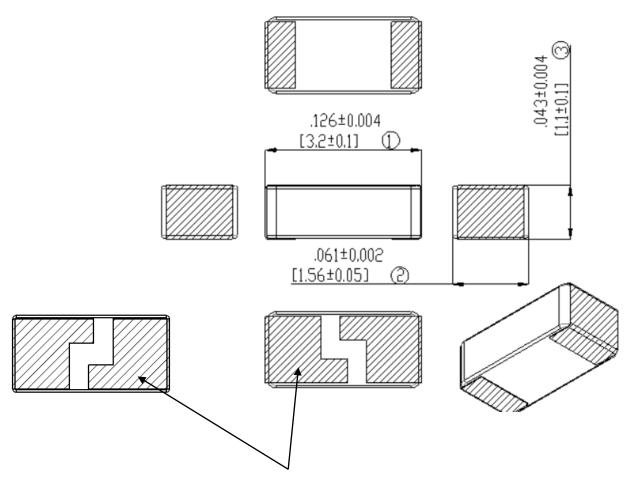

- 1. Antenna is symmetrical, both of antenna pattern have same RF performance.
- 2. The size of slot is only for reference.





# **Description:**

2.5-2.69GHz Ceramic SMT Antenna

PART NUMBER: W3020

## **MECHANICAL DRAWING AND TERMINAL CONFIGURATION**

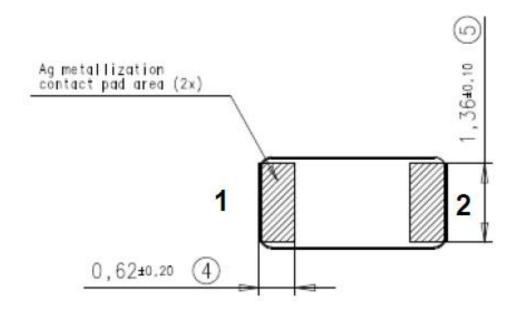



No.	Terminal Name	Terminal Dimensions
1	Feed / GND	0.62 x 1.36 mm
2	Feed / GND	0.62 x 1.36 mm
Antenna is symmetrical. Either of terminals 1 or 2 can be Feed / GND		





## **Description:**

### 2.5-2.69GHz Ceramic SMT Antenna

PART NUMBER: W3020


### **PCB Layout**

Ground cleared under antenna, clearance area 4.00 x 6.25 mm

Matching and tuning component value and placement depend on application and surrounding mechanics / materials.

Feed line should be designed to match 50  $\Omega$  characteristic impedance, depending on PWB material and thickness.

Recommended test board layout for electrical characteristic measurement, test board outline size 80 x 37 mm.

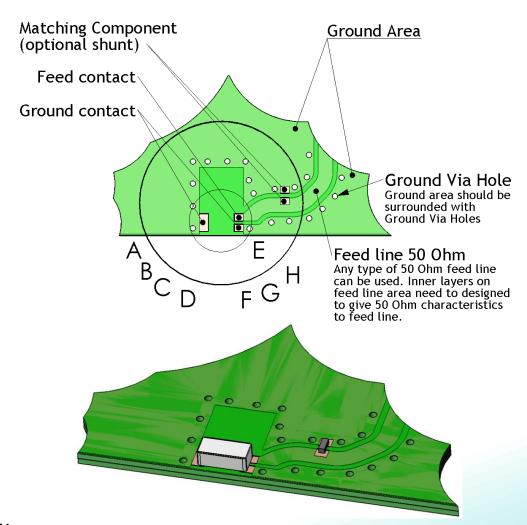






# **Description:**

## 2.5-2.69GHz Ceramic SMT Antenna


PART NUMBER: W3020

## **PCB Layout**

### Ground clearance area (4,00 x 6,25 mm)

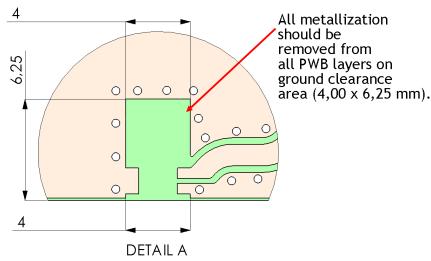


#### Opening in bottom/inner ground layers

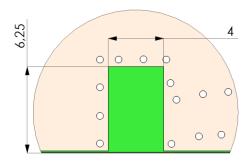

**DETAIL B** 

### Opening in other layers (no ground/ RF)

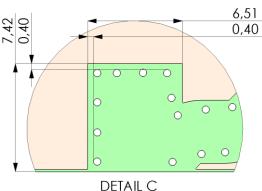






# **Description:**

## 2.5-2.69GHz Ceramic SMT Antenna


PART NUMBER: W3020

## **PCB Layout**

## Pad dimensions in top copper

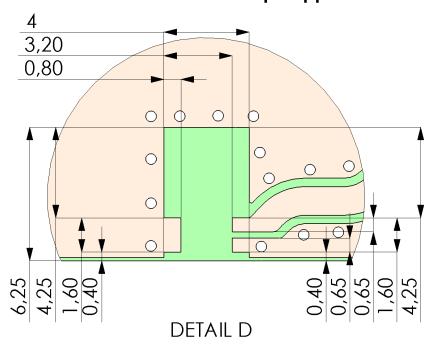

### Antenna position on PWB layout

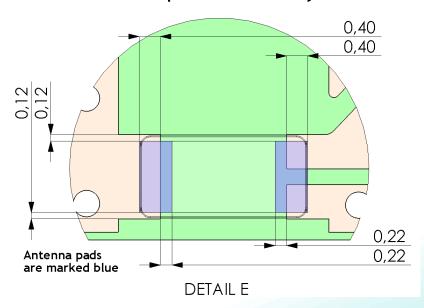





## **Description:**

## 2.5-2.69GHz Ceramic SMT Antenna

**PART NUMBER: W3020** 


## **PCB Layout**

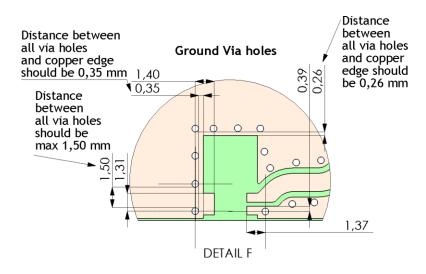

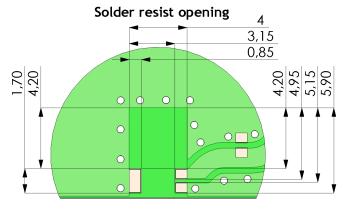

DETAIL G

#### Paste stencil recommendation

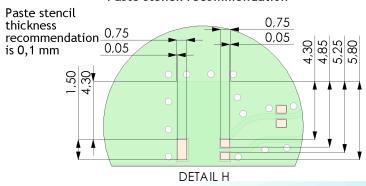

Issue: 1821




# **Description:**


## 2.5-2.69GHz Ceramic SMT Antenna


**PART NUMBER: W3020** 

## **PCB Layout**

Pulse test PWB size is  $37 \times 80$  mm, other sized boards can be used depending on customer device size (minimum  $35 \times 35$  mm)

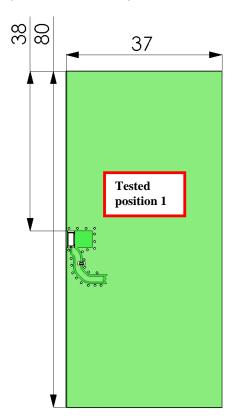

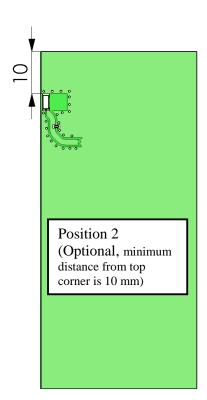

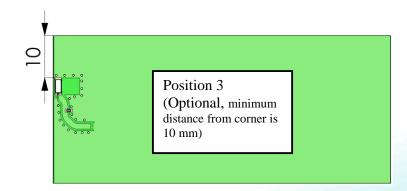



# **Description:**

### 2.5-2.69GHz Ceramic SMT Antenna

PART NUMBER: W3020


# **Series: Ceramic Chip**


#### **CHARTS**

Ground cleared under antenna, clearance area 4.00 x 6.25 mm


#### Typical Electrical Characteristics (T=25 $\mathcal{C}$ )


Measured on the  $80 \times 37$ mm test board with matching circuit (shunt 1.0 pF) and in antenna position 1 on PWB layout, see page 9.

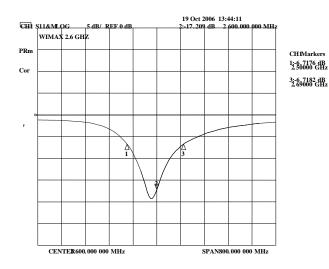

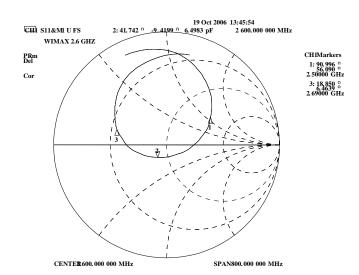

Typical Return Loss S11/ impedance, free space efficiency and gain

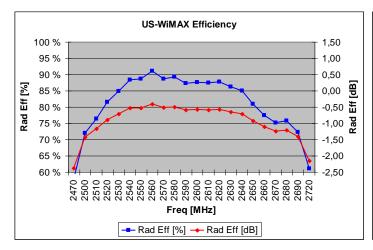

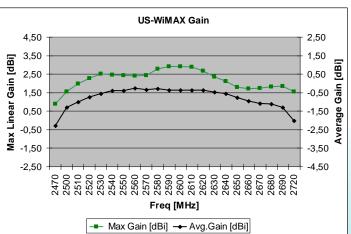

Issue: 1821

11




**Description:** 

2.5-2.69GHz Ceramic SMT Antenna

**PART NUMBER: W3020** 

### **CHARTS**

**Typical Free Space Radiation Patterns** 

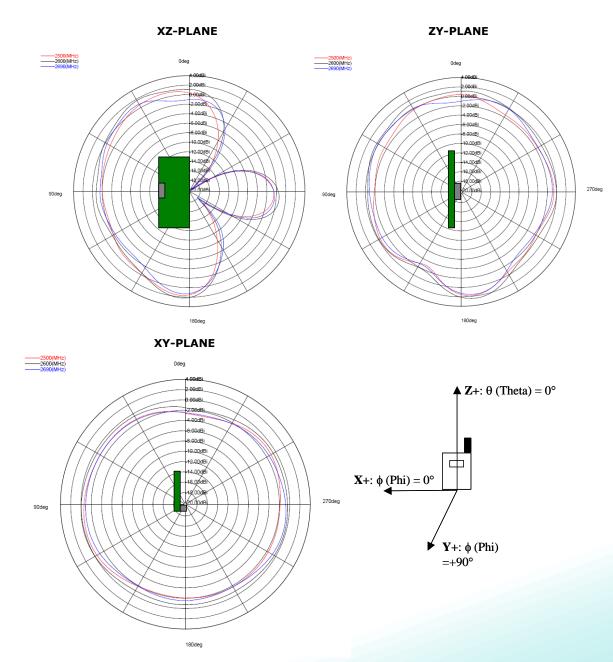

Issue: 1821

