

# Wireless Charging Coils (Single)

## Overview

Signal's Wireless Charging Coil (WCC) Series are wireless charging transmission coils, available in single, double and multiple windings configurations. The WCC Series allows power to be transmitted wirelessly through inductive coupling to charge an array of products.

The WCC Series transmitter coils utilize inductive coupling to transfer signals, data and power from one source to another. Of its many applications, the most common include phones, tablets, gaming controllers, wearable devices, tooth-brushes, robotic cleaners, drones and many smart car charging applications.

The advantages of the WCC's use of inductive coupling eliminates conductive connections and traditional wiring, seamlessly transferring data and power while avoiding the mechanical abrasion, corrosion and wearing-out of conductive contacts. The fixed-in position inductive coils are non-moving, resistant to vibration and corrosion, and are designed for reliability and longevity.




**Model Shown:**  
WTSC-10R0K-A3,  
Top View



**Model Shown:**  
WTSC-24R0K-A10, Front View

## Features

1. Pin cooling technology and tight pin tolerance control within  $\pm 1.0$  mm after the Tin Immersion process
2. Two core shapes, square/rectangular (Q) or circular (C)
3. Size and shape characteristics are customizable
4. Qi standard compliance
5. Low profile & high mechanical intensity
6. Inductance tolerance is  $\pm 5\%$  for (J),  $\pm 10\%$  for (K), with inductance of 6R3 for 6.3uH
7. Performance had been confirmed based on WPC equipment
8. Operating temp:  $-20^{\circ}\text{C}$  to  $85^{\circ}\text{C}$  (general applications);  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$  (automotive)
9. Compliance with all environmental requirements, including RoHS, REACH, Prop 65 & Conflict Minerals

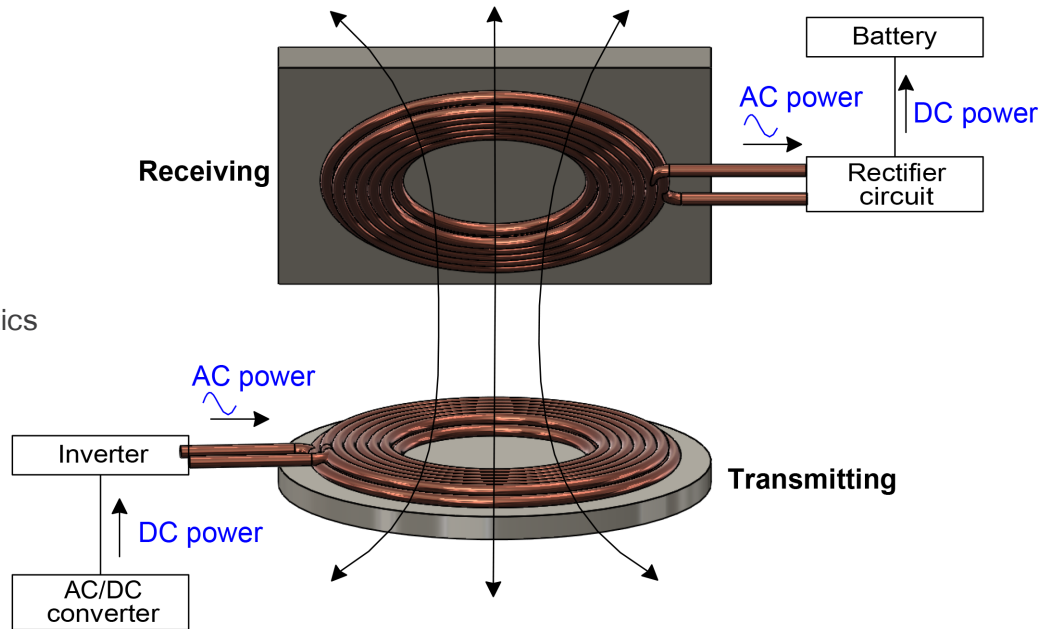

Custom versions available upon request.

© 2020 Signal Transformer Inc. Specifications subject to change without notice. 06.20



128 Atlantic Avenue, Lynbrook, NY 11563  
Toll Free 866-239-5777 | Tel 516-239-5777 | Fax 516-239-7208  
sales@signaltransformer.com | techhelp@signaltransformer.com

[belfuse.com/signal](http://belfuse.com/signal)

# Wireless Charging Coils (Single)


## Product Identification

W T S C – 6R3 K – A11


(1) (2) (3) (4) - (5) (6) - (7)

- (1) Wireless Charging Coil Assembly
- (2) Location: **T:** Transmitter, **R:** Receive
- (3) Number of Windings: **S:** Single, **M:** Multiple
- (4) Single Winding Core Shape:
  - Q:** Square/rectangle, **C:** Circular
- (5) Inductance: 6R3 for 6.3uH
- (6) Inductance Tolerance: **J:**  $\pm 5\%$ , **K:**  $\pm 10\%$
- (7) Qi Standard Code or other

P/N: WTSC-10R0K-A3	
Structure size (mm)	35.0 X 2.3 X 3.3
L (uH)	10.0 $\pm 10\%$
Test Frequency	@100kHz, 1.0V
DCR (m $\Omega$ )	75 MAX
I rms (A)	4.0
I sat (A)	6.0

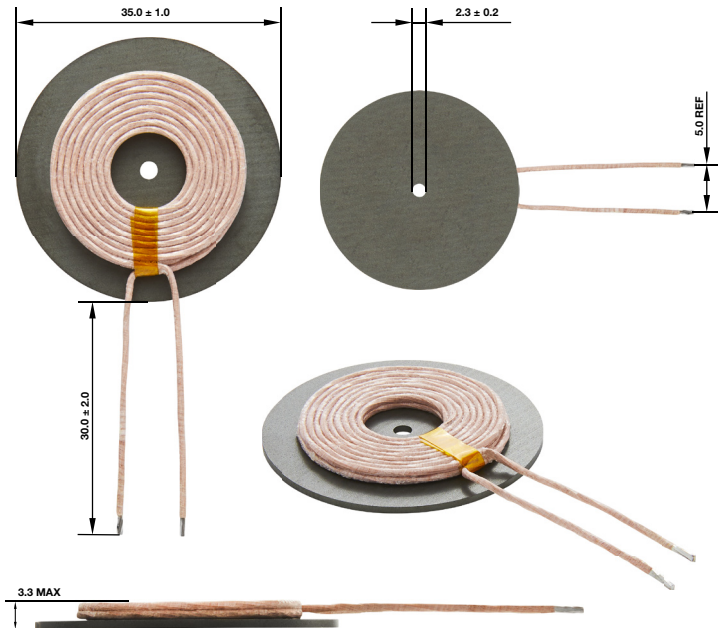

P/N: WTSC-6R3K-A11	
Structure size (mm)	50.0 X 3.5
L (uH)	6.3 $\pm 10\%$
Test Frequency	@100kHz, 1.0V
DCR (m $\Omega$ )	40 MAX
I rms (A)	6.0
I sat (A)	10.0

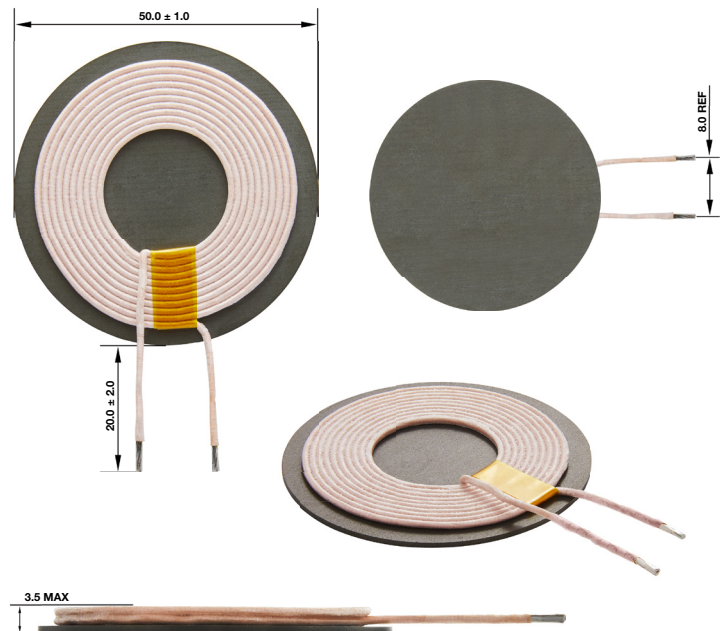

Custom versions available upon request.


© 2020 Signal Transformer Inc. Specifications subject to change without notice. 06.20



128 Atlantic Avenue, Lynbrook, NY 11563  
 Toll Free 866-239-5777 | Tel 516-239-5777 | Fax 516-239-7208  
 sales@signaltransformer.com | techhelp@signaltransformer.com


[belfuse.com/signal](http://belfuse.com/signal)

# Wireless Charging Coils (Single)

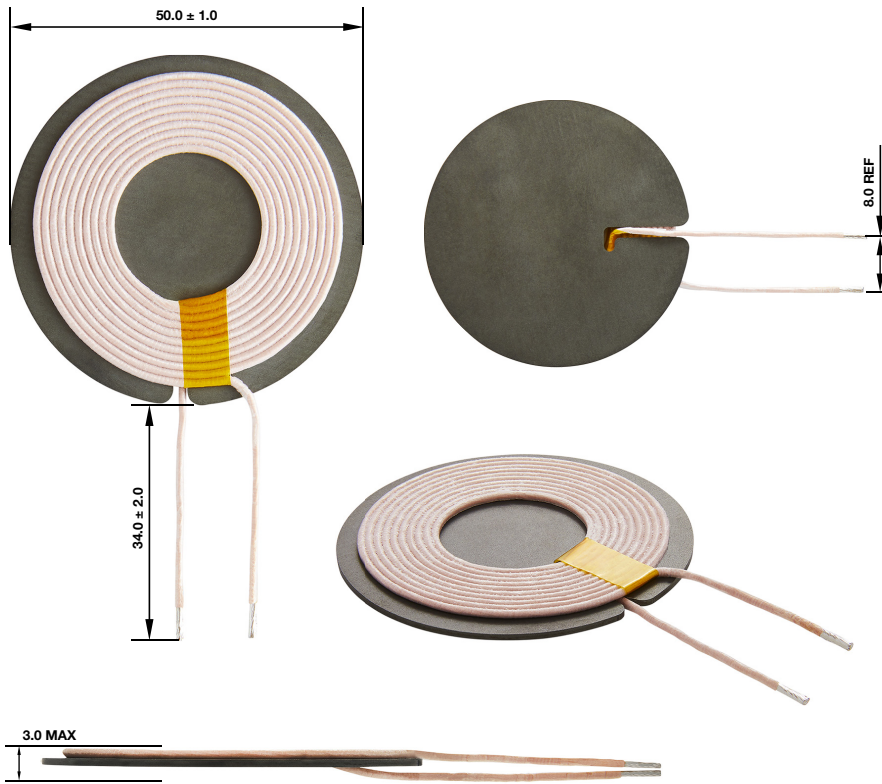

P/N: WTSC-6R3K-A11B	
Structure size (mm)	50.0 X 3.0
L (uH)	6.3±10%
Test Frequency	@100kHz, 1.0V
DCR (mΩ)	40 MAX
I rms (A)	6.0
I sat (A)	10.0

P/N: WTSC-24R0K-A10	
Structure size (mm)	50.0 X 4.0
L (uH)	24.0±10%
Test Frequency	@100kHz, 1.0V
DCR (mΩ)	85 MAX
I rms (A)	6.0
I sat (A)	10.0

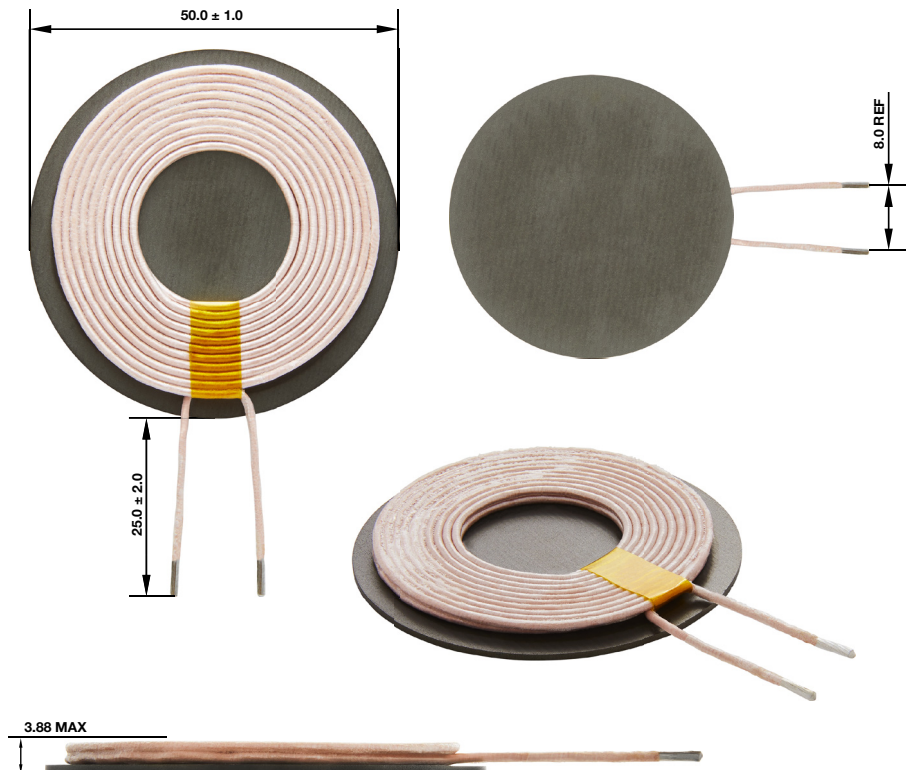

Custom versions available upon request.

© 2020 Signal Transformer Inc. Specifications subject to change without notice. 06.20



128 Atlantic Avenue, Lynbrook, NY 11563  
 Toll Free 866-239-5777 | Tel 516-239-5777 | Fax 516-239-7208  
 sales@signaltransformer.com | techhelp@signaltransformer.com

[belfuse.com/signal](http://belfuse.com/signal)