





NOTES: UNLESS OTHERWISE SPECIFIED

1. FOR USE WITH RG-316 OR EQUIVALENT CABLE.
2. MATERIAL SPECIFICATIONS:  
 INSULATORS: PTFE  
 SPACER: DELRIN  
 OUTER CONTACT: BERYLLIUM COPPER  
 ALL OTHER METAL PARTS: BRASS
3. FINISH SPECIFICATIONS:  
 CONTACT: .000003 MIN THICK GOLD OVER .000050 MIN THICK NICKEL  
 ALL OTHER METAL: THIN GOLD OVER .000050 MIN THICK COPPER
4. ELECTRICAL SPECIFICATIONS:  
 IMPEDANCE: 50 OHMS  
 FREQUENCY RANGE: DC TO 6 GHz  
 VSWR: 1.5 MAX
5. CAP, SPACER AND FERRULE SHIPPED LOOSE
6. CRIMP FERRULE (.128 HEX) AND SOLDER TO CONTACT PIN.

REV	DESCRIPTION	BY DATE	APPD
A	ER058863	JL 06/29/15	DCAM

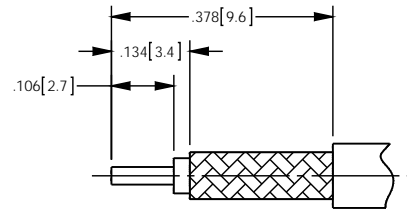

RECOMMENDED  
CABLE STRIPPING DIM'S

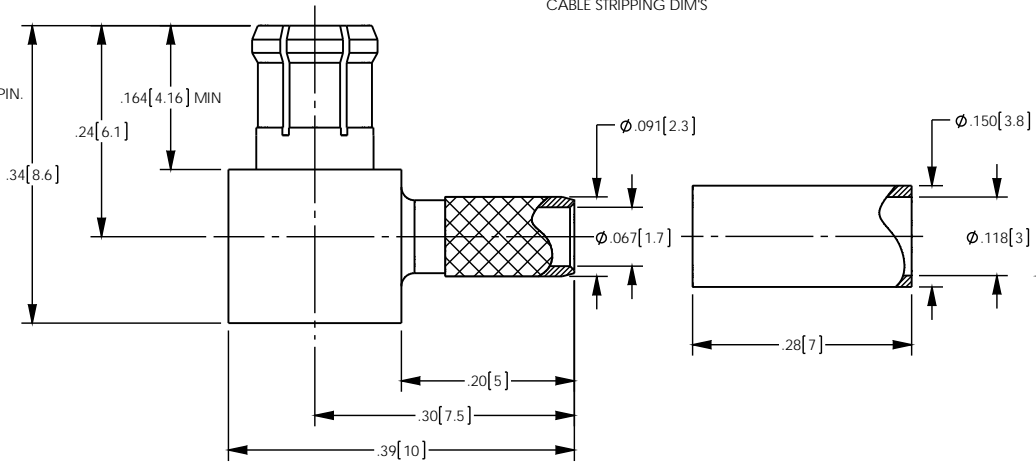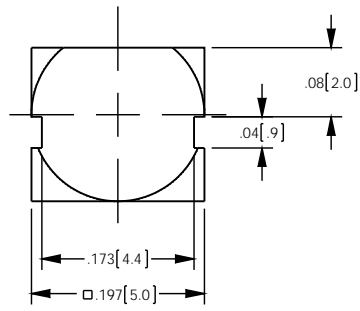

CATALOG P/N: 1213A204M

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (MM) TOLERANCES: DECIMAL: XX [XX] ± .01 [0.3] XXX [XXX] ± .005 [0.13] XXXX [XXXX] ± .0005 ANGLES: ± 2° SCALE: 6:1		 by WINCHESTER Winchester Electronics Corporation 199 Park Road Ext Suite 104 Middlebury, Connecticut 06762
<b>CUSTOMER SALES DRAWING</b>		
DRAWN: JL DATE: 06/24/2015	APPROVED: JL DATE: 06/29/2015	THIRD ANGLE 
DRAWN: JL DATE: 06/24/2015		APPROVED: JL DATE: 06/29/2015
APPROVED: DCAM DATE: 06/29/2015		APPROVED: XXX DATE: XX/XX/XX
<b>A</b>		1213A204M
SHIT 1 OF 1		REV A