
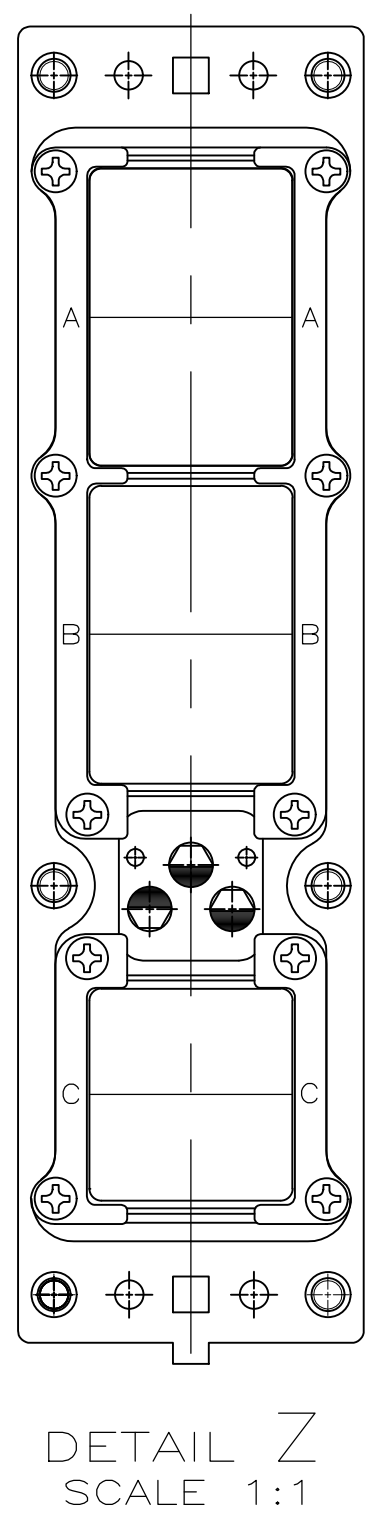
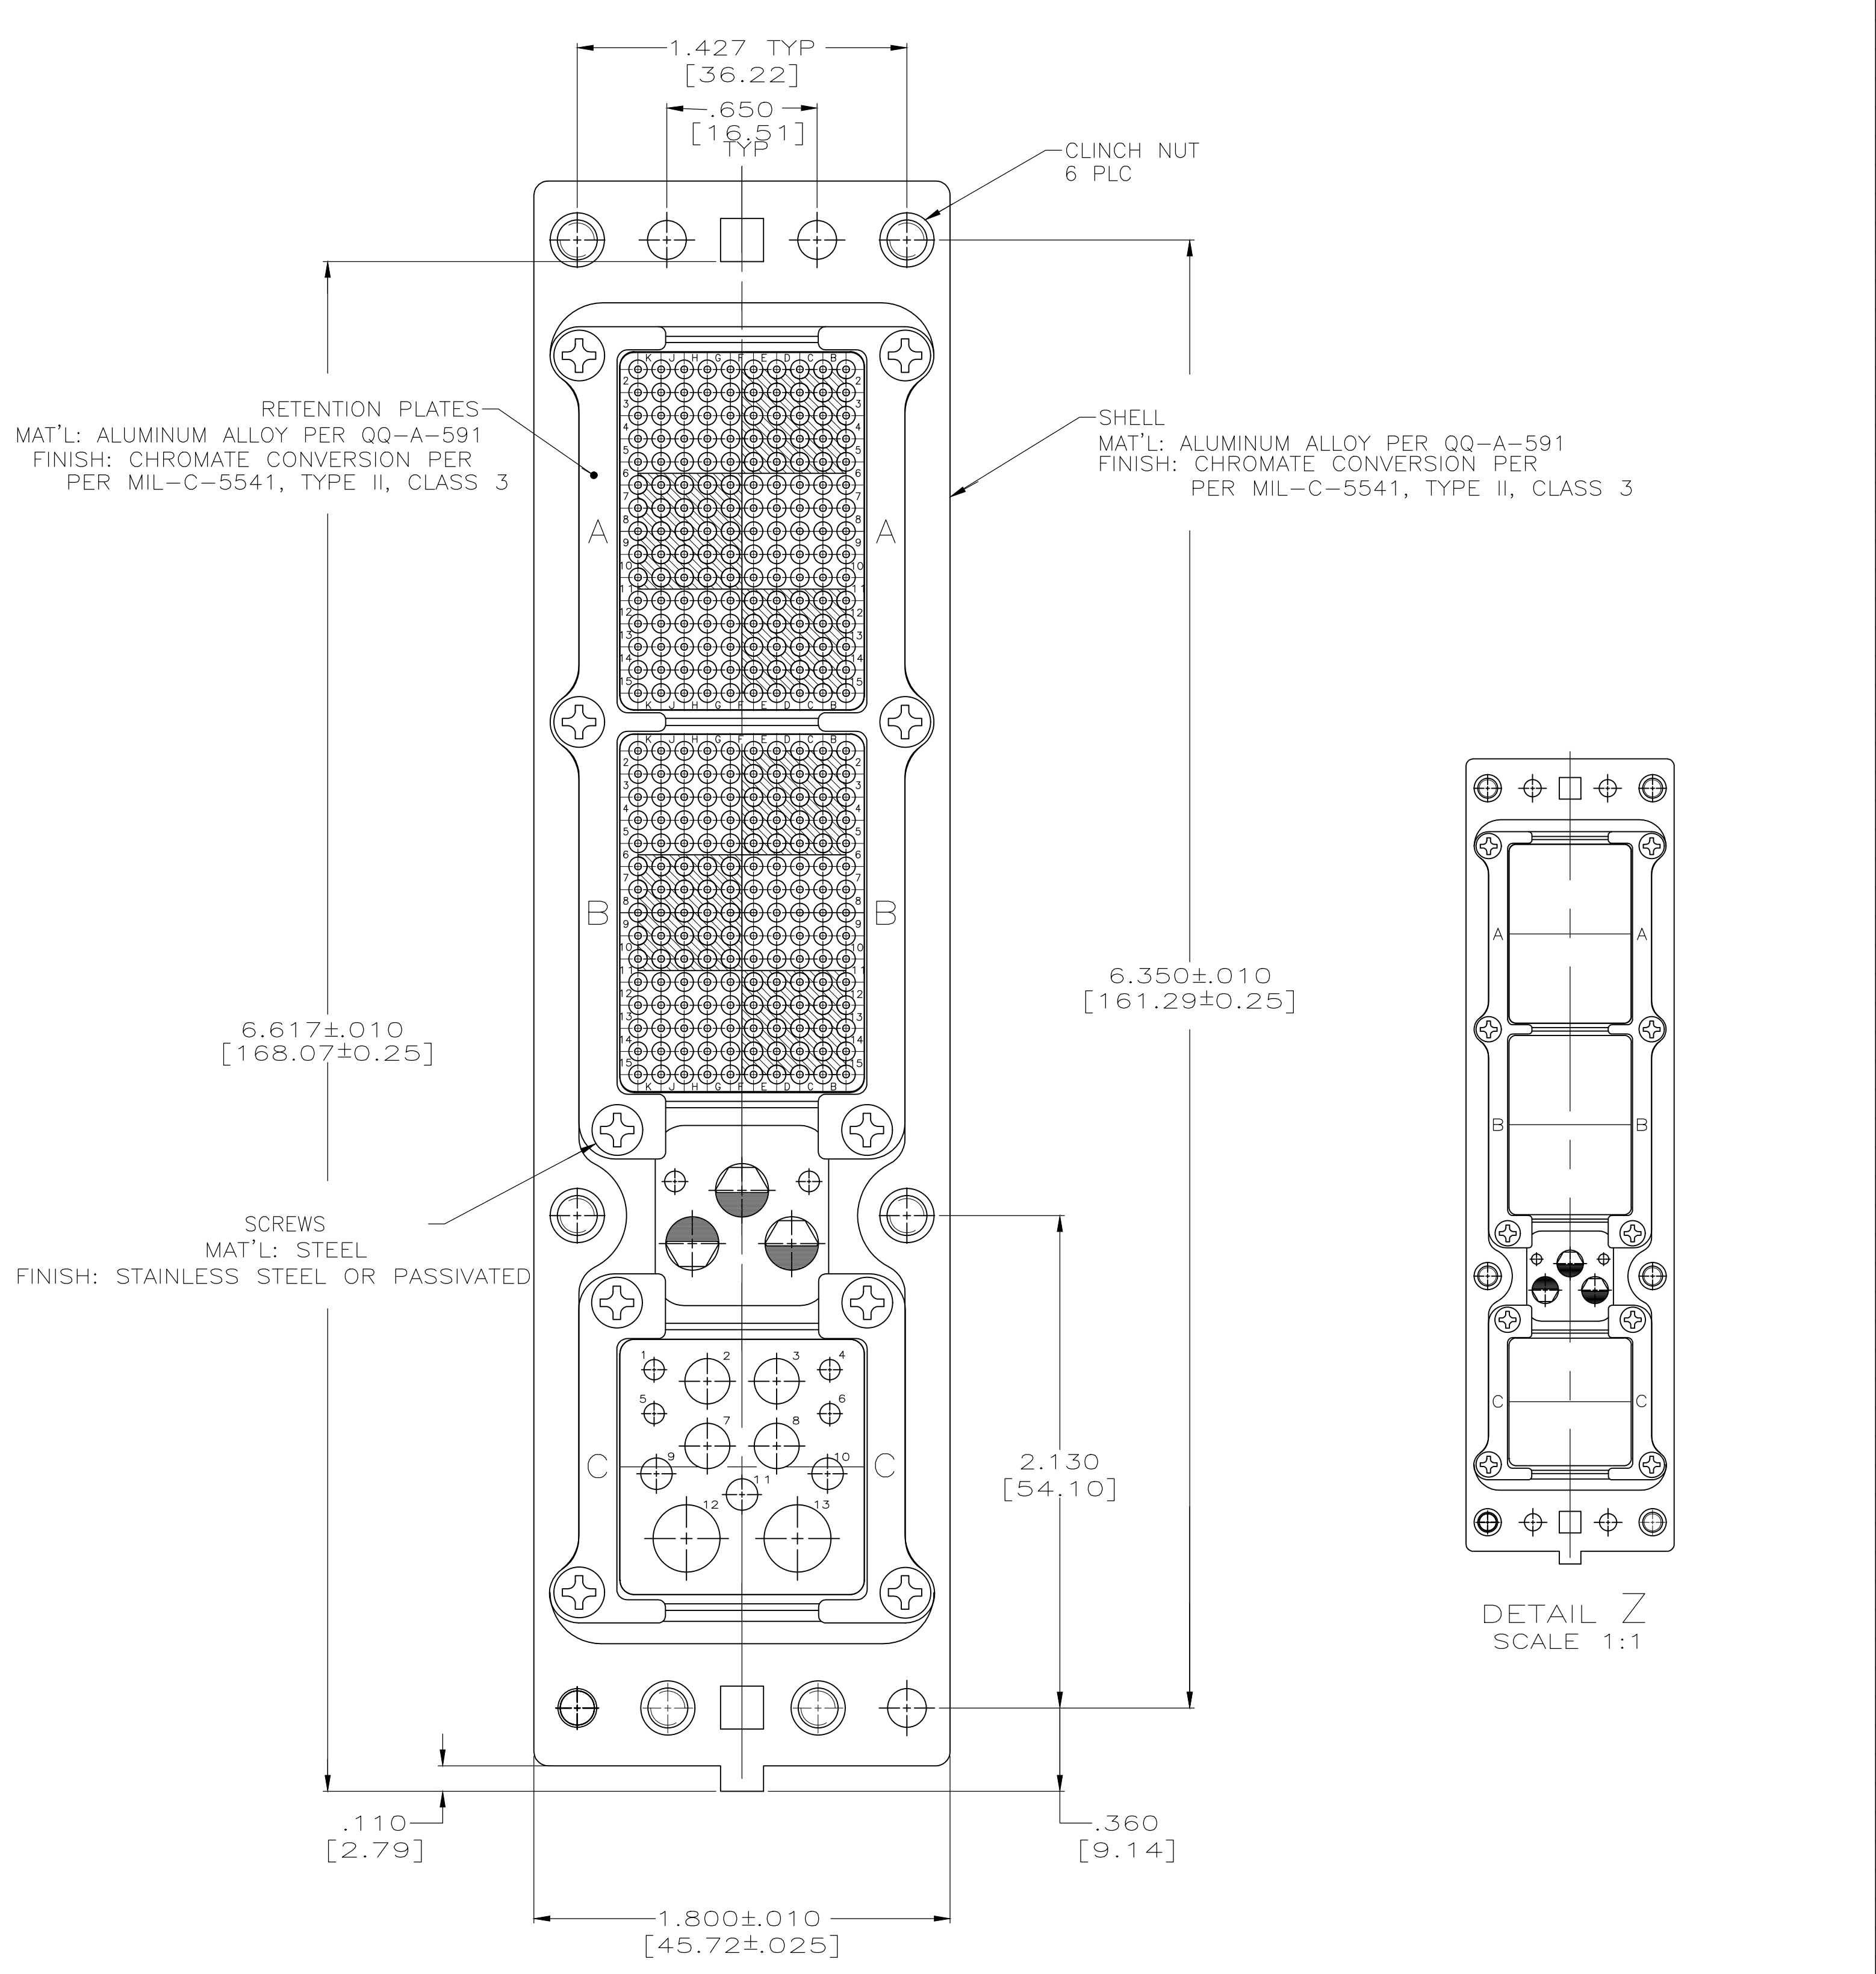
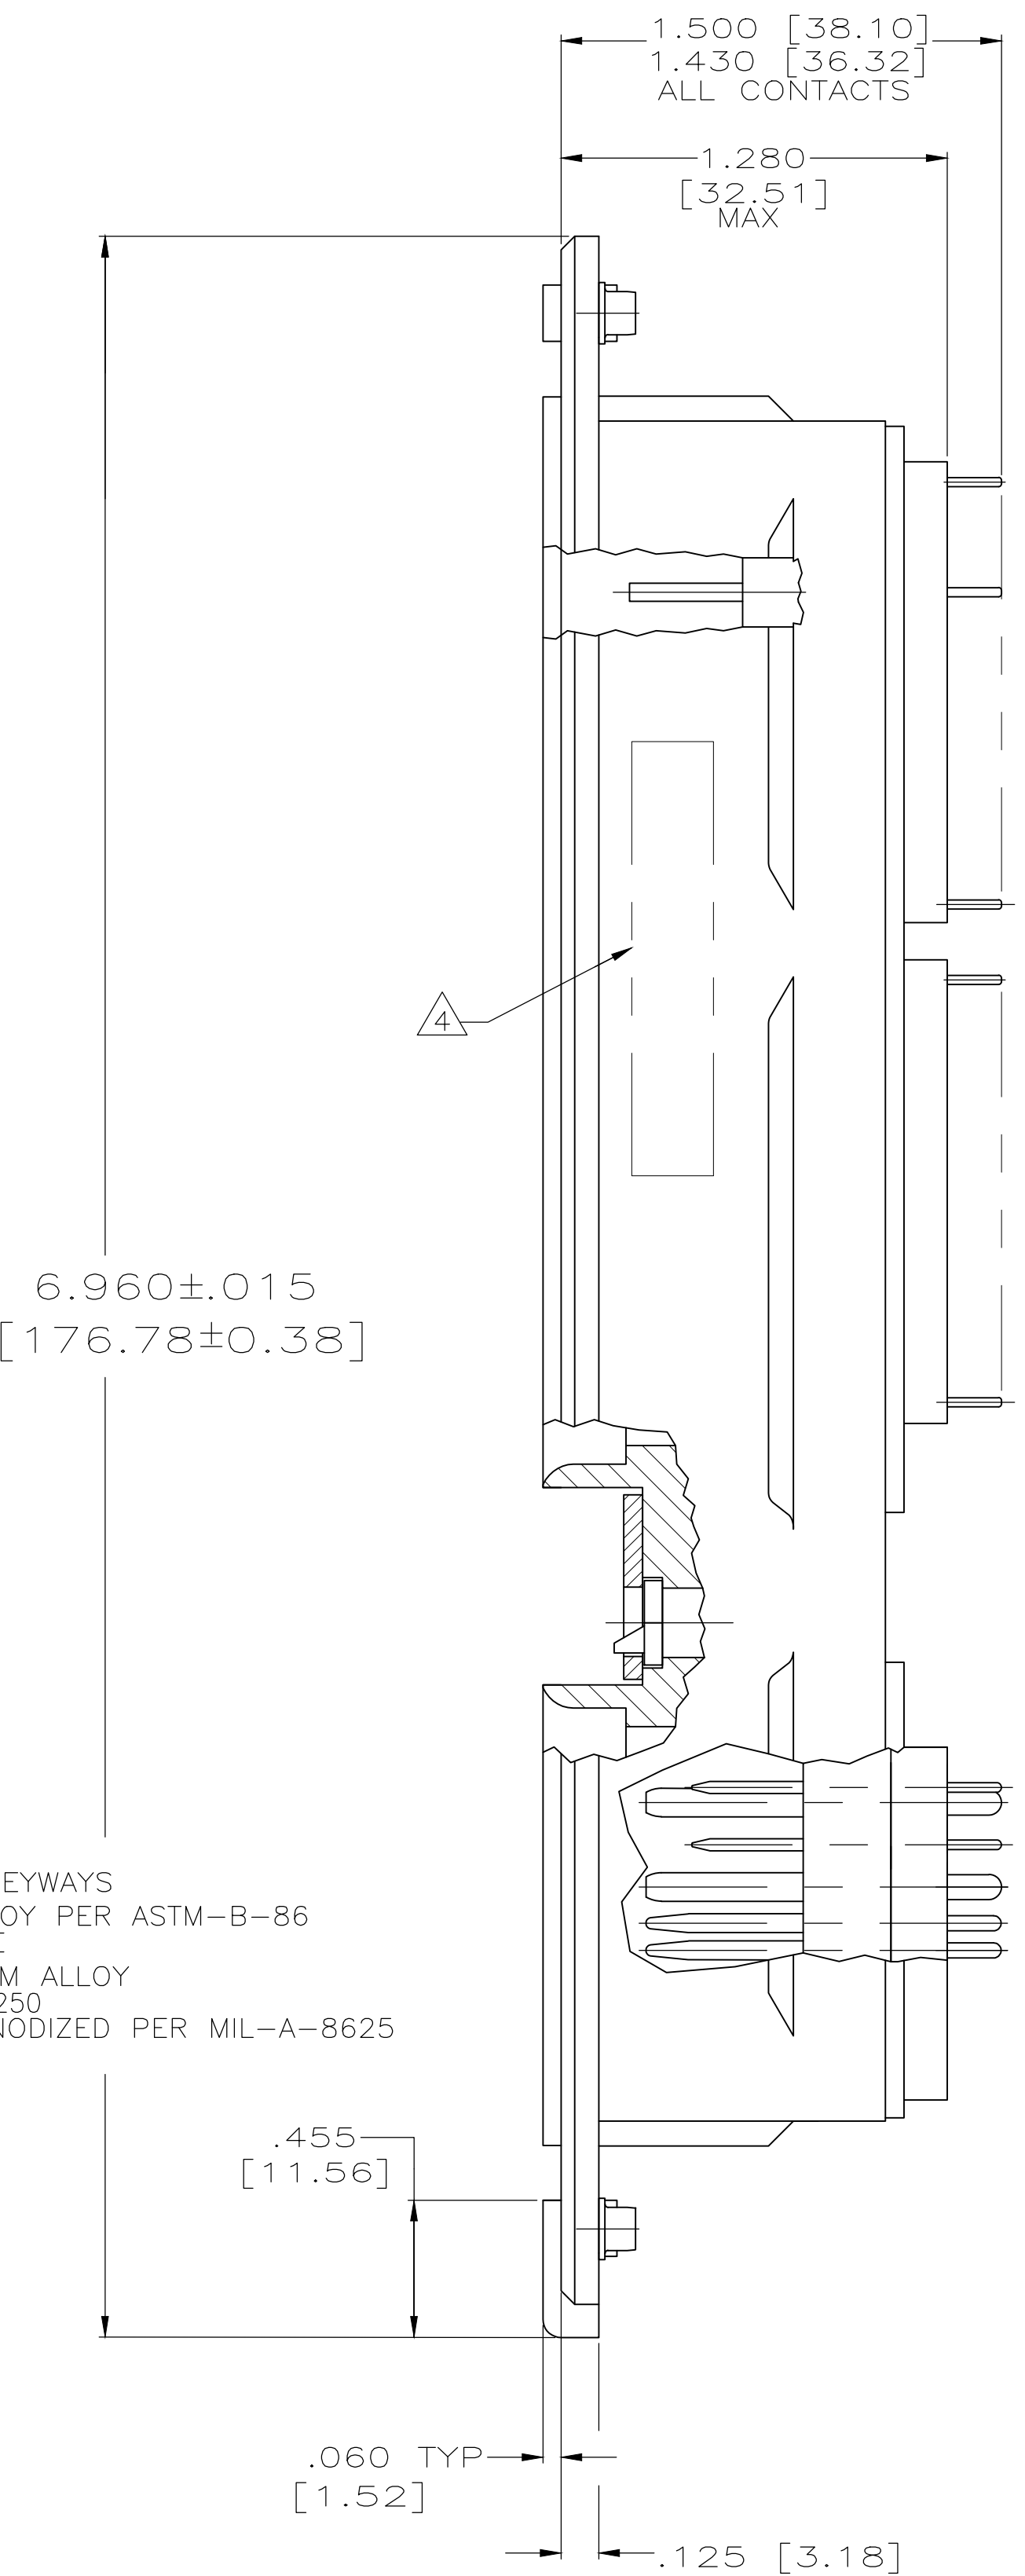


REVISIONS				
P	LYR	DESCRIPTION	DATE	APPV
D		REVISED PER ECO-17-018523	19JAN2018	PHM CT

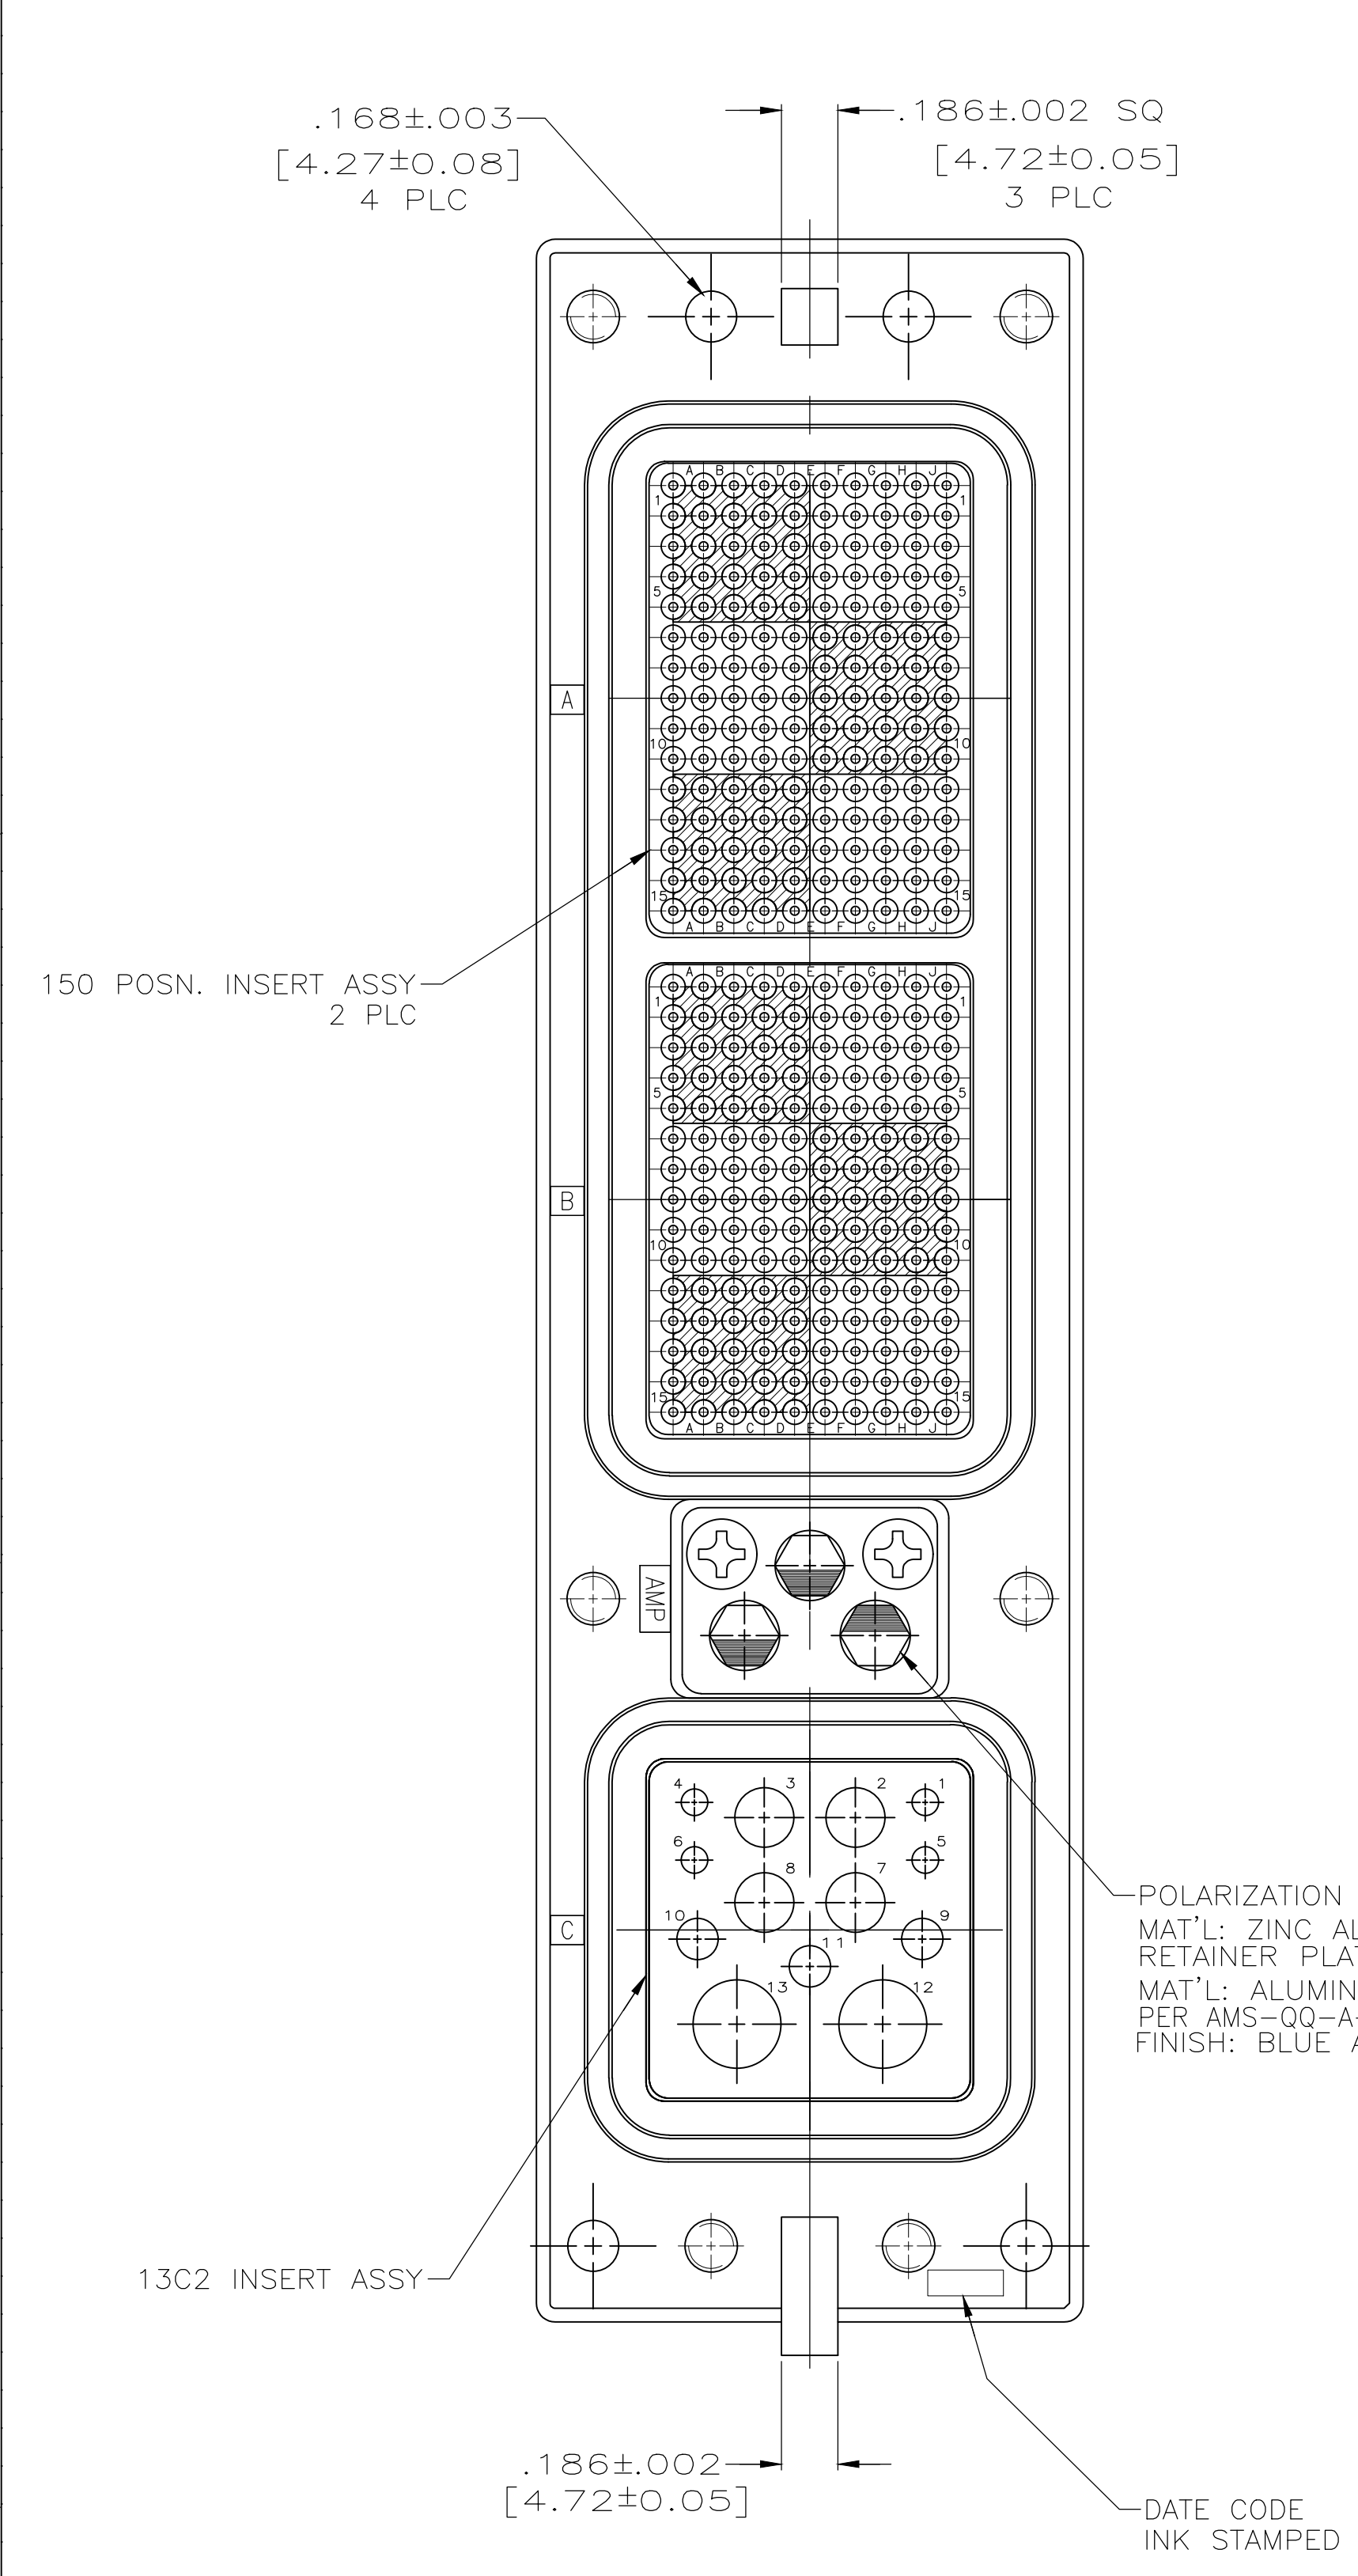

1. ALL CONTACTS ARE LOADED IN CONNECTOR AND ARE FRONT RELEASE/REMOVE, EXCEPT NO COAX CONTACTS ARE SUPPLIED. CONTACT SOLDER TAILS ARE SOLDER COATED .000100 [0.0025] MIN THICK.
2. POLARIZING KEYS ARE SHOWN IN POSITION "04". CONNECTOR KEYED IN POSITION PER TABLE.
3. ALL CONNECTOR DIMENSIONS ARE PER ARINC 600 SPECIFICATIONS.
4. CUSTOMER MARKING (PER TABLE) MARKED IN THIS AREA.
5. CLINCH NUTS SHOWN IN LOCATION FOR 1218644-1, SEE TABLE FOR CLINCH NUT INSTALLATION ON OTHER DASH NUMBERS.

MODULE LETTER	NUMBER OF CONTACTS	SIZE	AMP PART NO.	SOLDER TAIL DIAMETER
A	150	22	1-211431-5	.023-.027 [0.58-0.69]
B	150	22	1-211431-5	.023-.027 [0.58-0.69]
C	4	20	1-448138-6	.030-.034 [0.76-0.86]
	3	16	1-448139-5	.048-.052 [1.22-1.32]
	4	12	448140-9	.079-.083 [2.01-2.11]

PRELIMINARY NOT RELEASED FOR PRODUCTION	(6) 6-32, SEE DETAIL Z	-	10	1218644-2
	(6) 6-32, AS SHOWN	35351-176226-01	04	1218644-1
CLINCH NUT LOCATION	CUSTOMER MARKING	KEYING POSITION	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN C.C.THOMAS 3/7/00	TE Connectivity Ltd.	
DIMENSIONS: INCHES		CHK S.GLATFELTER 3-8-00	APVD S.GLATFELTER 3-8-00	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		
0 PLC ± -		PRODUCT SPEC		
1 PLC ± -		APPLICATION SPEC		
2 PLC ± -		SIZE CAGE CODE DRAWING NO		
3 PLC ± .005 [0.13]		RESTRICTED TO		
4 PLC ± -		A1 00779 C=1218644		
ANGLES ± -		CUSTOMER DRAWING SCALE 2:1 SHEET 1 OF 1 REV D		