


# TYPE B

Male connector – straight and angled – 32 and 64 positions

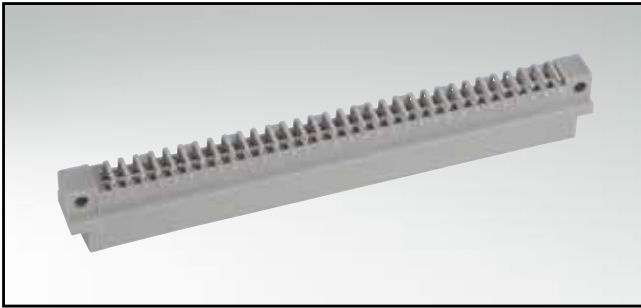


RoHS compliant



### DESCRIPTION

- Solder pin
- Quality class 3 (also available in quality class 2 or 1)
- Premating contacts in row "a" und "b" available
- Special assembly on request

### PRODUCT DRAWING

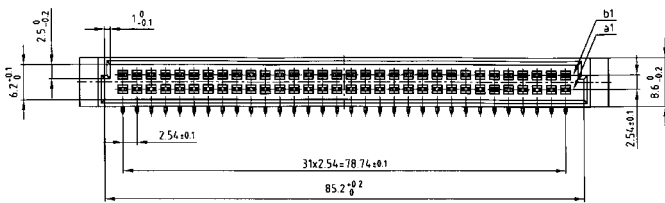




### PCB-hole pattern

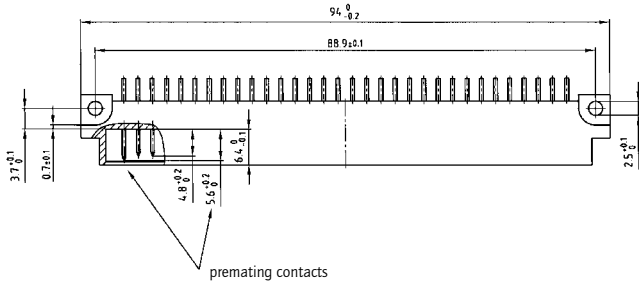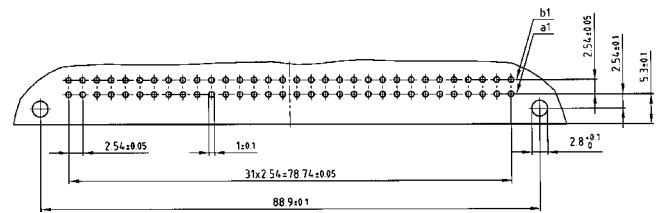

Solder pin angled

Solder pin straight

Solder pin angled with clip



### ORDER DATA

(Dim. = mm)

No. of Pos.	Row	• = contact, + = no contact					Solder pin angled	Solder pin straight	Solder pin angled with clip
		Pos. 1	2	3	4	5 ...			
32	b	+	+	+	+	+	121 A 10019 X	121 A 10049 X	121 A 20819 X
	a	•	•	•	•	•			
32	b	+	•	+	•	+	121 A 10029 X	121 A 10059 X	121 A 20829 X
	a	+	•	+	•	+			
64	b	•	•	•	•	•	121 A 10039 X	121 A 10069 X	121 A 20839 X
	a	•	•	•	•	•			

Clip for hole diameter 2.8 + 0.1 mm, PCB thickness = 1.6 mm