

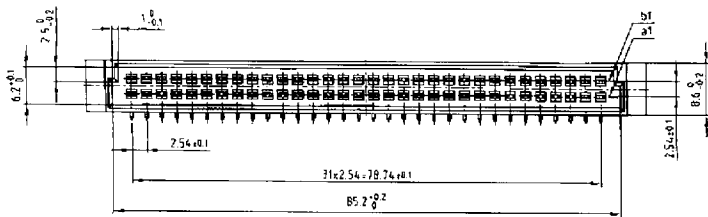


Male connector
– contact spacing
2.54 and 5.08 mm –

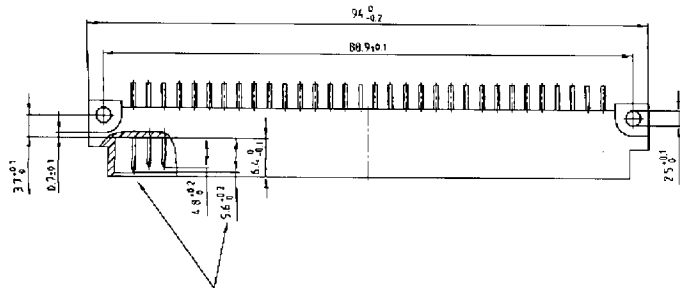


PCB-hole pattern

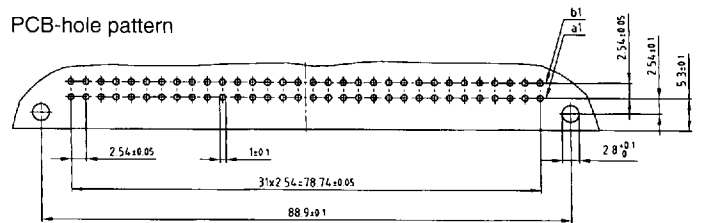


premating contacts in row a


Kinds of contacts




Solder pin



Solder lug



angled with clip




Kat 1 | 5FA

Part numbers

No. of Pos.	Version	Male connector – contact spacing 2.54 and 5.08 mm			
		angled	Solder pin	Solder lug	angled with clip
32		B 32 M 3 A a 121 A 10019 X	B 32 M 3 P a 121 A 10049 X	B 32 M 3 L a 121 A 10079 X	B 32 M 3 AC a 121 A 20819 X
32		B 32 M 3 A a + b 121 A 10029 X	B 32 M 3 P a + b 121 A 10059 X	B 32 M 3 L a + b 121 A 10089 X	B 32 M 3 AC a + b 121 A 20829 X
64		B 64 M 3 A a + b 121 A 10039 X	B 64 M 3 P a + b 121 A 10069 X	B 64 M 3 L a + b 121 A 10099 X	B 64 M 3 AC a + b 121 A 20839 X

Part Number

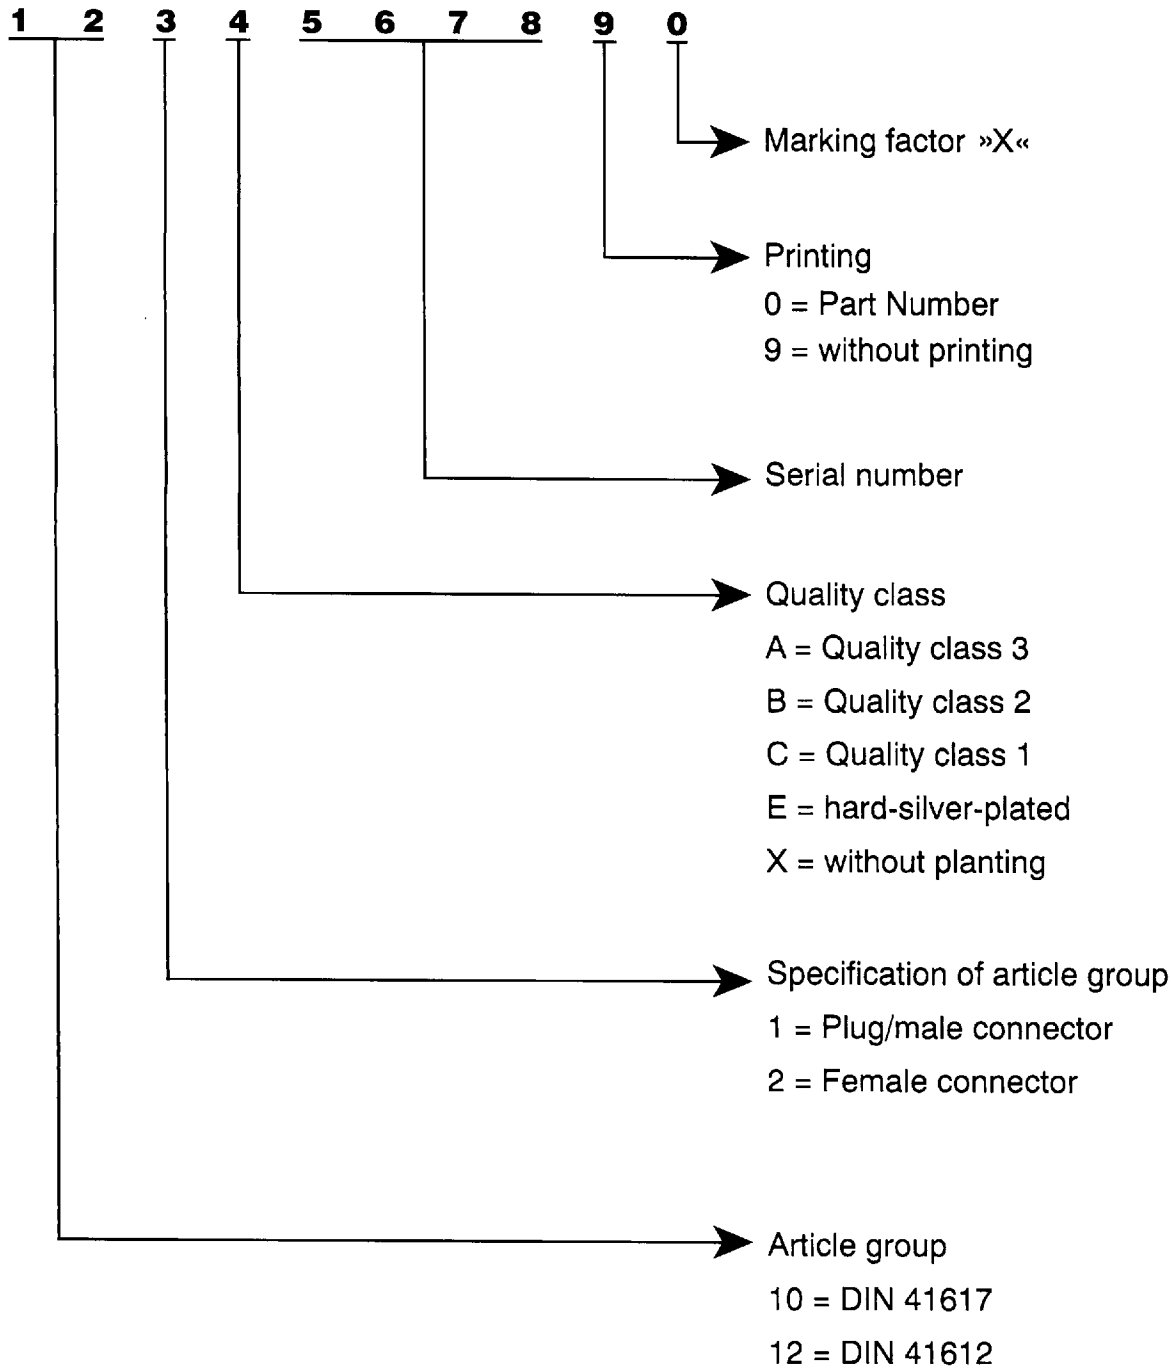

Order example

Male connector type C 64 pos. angled solder pin without printing	
Quality class	Part Number
3	C 64 M 3 A a + c 121 A 10139 X
2	C 64 M 2 A a + c 121 B 10139 X
1	C 64 M 1 A a + c 121 C 10139 X

■ 9017935 0000163 041 ■