

# Cavity Bandpass Filters

50Ω DC to 15 GHz

## The Big Deal

- Very low insertion loss with excellent power handling
- Very fast roll-off with wide stopband
- Passbands up to 15 GHz
- Stopbands up to 20 GHz



## Product Overview

Mini-Circuits' cavity filters are designed by implementing resonant structures with very high Q and are ideal for narrow-band, high-selectivity applications. These designs can provide bandwidths as narrow as 1% with very high selectivity and excellent low noise floor. Low insertion loss combined with excellent power handling makes them well-suited for transmitter and receiver front end. Advanced filter design and construction enables stopband width greater than 3x the center frequency.

Mini-Circuits' cavity filters feature a special protective assembly to prevent accidental de-tuning that would otherwise require expensive replacement or return to factory for re-tuning. Custom integrated assembly with LNA and bias tees results in greatly simplifying system integration. Precise machining allows realization of cavity filters with small form factors for applications where size is critical. Excellent repeatability across units is achieved through precise tuning and process control.

## Key Features

Feature	Advantages
Low insertion loss	Low signal loss results in better SNR in receiver front end and better power delivery to antenna in transmitter
Fast roll-off	Higher selectivity results in better adjacent channel rejection and dynamic range
Wide stopband	Wide spur free band results in better receiver sensitivity
High power handling	Well suited for transmitter application
Protective assembly	Prevents accidental de-tuning of precisely tuned resonant circuit

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Bandpass Filter

## ZVBP-2400-S+

50Ω 2375 to 2425 MHz



Generic photo used for illustration purposes only

CASE STYLE: QT2302  
Connectors Model  
SMA-F ZVBP-2400-S+

### Features

- Low insertion loss
- High rejection
- Connectorized package

### Applications

- ISM applications
- Radio location
- Mobile communication

### Electrical Specifications at 25°C


Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Pass Band	Center Frequency	Fc	2400	-	0.6	-	dB
	Insertion Loss	F1-F2	2375 - 2425	-	0.7	1.2	dB
	VSWR	F1-F2	2375 - 2425	-	1.22	1.38	:1
Stop Band, Lower	Insertion Loss	DC-F3	DC - 2250	40	52	-	dB
	VSWR	DC-F3	DC - 2250	-	20	-	:1
Stop Band, Upper	Insertion Loss	F4-F5	2550 - 6000	40	54	-	dB
	VSWR	F4-F5	2550 - 6000	-	20	-	:1

### Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	15 W max.

Permanent damage may occur if any of these limits are exceeded.

### Functional Schematic

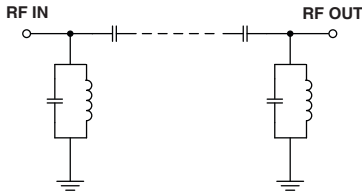





### Typical Frequency Response

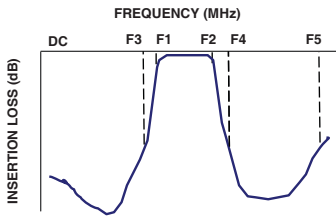

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (nsec)
10	99.93	782.50	2375	12.54
2250	52.97	98.55	2378	12.24
2270	46.55	88.00	2380	12.07
2280	42.97	81.22	2382	11.93
2300	34.55	66.48	2384	11.79
2310	29.55	57.72	2386	11.67
2325	20.59	39.47	2388	11.57
2340	9.21	12.78	2390	11.50
2348	3.31	3.73	2392	11.43
2375	0.63	1.04	2394	11.39
2400	0.59	1.04	2396	11.36
2425	0.65	1.09	2398	11.35
2430	0.69	1.16	2400	11.35
2451	3.43	3.74	2402	11.37
2460	10.39	15.24	2404	11.39
2475	21.86	48.24	2406	11.43
2489	30.30	74.20	2410	11.56
2550	54.67	141.12	2415	11.80
4500	99.22	183.94	2420	12.14
6000	100.84	87.48	2425	12.61

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

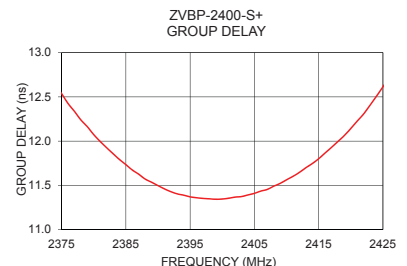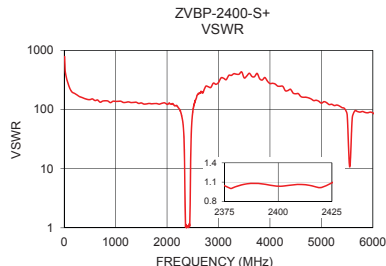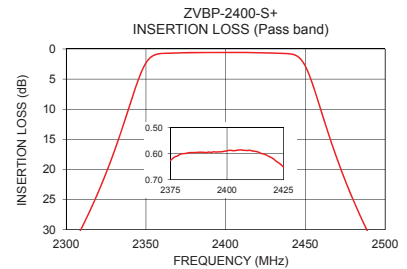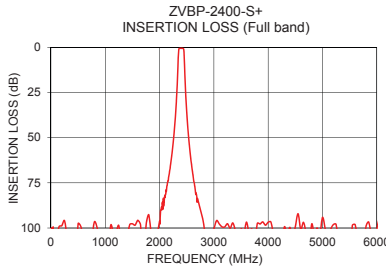

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

