



Mini-Circuits

MEDIUM POWER, HIGH GAIN

Wideband Amplifier

50Ω 18 to 45 GHz

ZVE-453G+
ZVE-453GX+
THE BIG DEAL

- High gain 41 dB typ. over the entire operating band
- Good gain flatness, ±3 dB typ.
- Saturated output power = +28 dBm typ.
- Adjustable DC voltage, +10 to +15 V



Generic photo used for illustration purposes only

APPLICATIONS

- Wideband Test and Instrumentation
- 5G mmW
- SATCOM
- Wireless Infrastructure

Model No.	ZVE-453G+	ZVE-453GX+
Option	With heatsink & fan	Without heatsink & fan
Case Style	VN3071-4	
Connectors	2.4mm Female	

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

PRODUCT OVERVIEW

Mini-Circuits' ZVE-453G+ is a coaxial, ½ Watt wideband high gain amplifier, operating from 18 to 45 GHz. This model operates over a single positive supply range of +10 to +15 V, allowing users to choose their desired operating voltage. Internal DC-DC conversion circuitry maintains constant efficiency over the full input voltage range. The amplifier incorporates several DC-protection features, such as over-voltage, reverse voltage and in-rush current, that protect the amplifier from damage if mishandled during operation. The wideband operation combined with high output power makes this amplifier an ideal choice for testing and instrumentation applications.

KEY FEATURES

Feature	Advantages
Wide-band amplifier, 18 to 45 GHz	A single amplifier serves the need for applications including 5G bands (24 to 39 GHz), SATCOM, Test & Instrumentation, etc.
Integrated fan assembly	Model ZVE-453G+ utilizes two integrated fans, keeping the amplifier cool to the touch during normal operation at room temperature
High gain Low VSWR Medium RF power	The amplifier provides 41 dB (typ.) of gain over the entire operating band, and is capable of delivering over ½ Watt of RF power
Adjustable DC Supply Voltage	The device is capable of operating from +10 to +15 V with consistent DC power consumption
DC Protection – Over-voltage Reverse voltage In-rush Current	The internal DC circuitry allows the amplifier to be protected from external mishandling, that could lead to catastrophic failures in the field

 REV. A
 ECO-012828
 ZVE-453G+
 MCLNY
 220414
Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

PAGE 1 OF 4



Mini-Circuits

MEDIUM POWER, HIGH GAIN

Wideband Amplifier

ZVE-453G+
ZVE-453GX+

ELECTRICAL SPECIFICATIONS AT 25 °C BASEPLATE

Parameter	Condition (MHz)	ZVE-453G+ ³ ZVE-453GX+ ⁴			Units
		Min.	Typ.	Max.	
Frequency Range		18000		45000	MHz
Gain	18000–30000	34.0	40		dB
	30000–45000	38.0	42		
Output Power at 1dB compression	18000 – 24000	22.0	26		
	24000 – 36000	26.5	28.5		
	36000 – 45000	23.0	25.5		
Saturated Output Power	18000 – 24000	25.0	27.5		
	24000 – 36000	27.0	29.5		
	36000 – 45000	24.5	27.5		
Output IP3	18000 – 45000		38		
Input VSWR	18000 – 45000		1.5	2.0	:1
Output VSWR ¹	18000 – 45000		1.5	2.0	:1
Operating DC Voltage		+10	—	+15	V
Device Operating Current at +15 V (ZVE-453GX+ / ZVE-453G+)			530 ⁴ / 730 ³	900 ⁴ / 1100 ³	mA
Device Operating Power at +15 V			12 ²	—	W

1. Open and short-circuit loads are not recommended at the amplifier output. Ensure proper 50 Ohm load before turning the amplifier "ON".

2. Device operating power is based on current when amplifier is in saturation.

3. For units with heatsink, limit ambient temperature to 50 °C.

4. For units without heatsink, limit the maximum baseplate temperature to 60 °C.

MAXIMUM RATINGS⁶

Parameter	Ratings
Operating Temperature	ZVE-453G+ -40 °C to +50 °C Ambient ZVE-453GX+ -40 °C to +60 °C Baseplate
Storage Temperature	-40 °C to +85 °C
Total Power Dissipation	13.5 W
RF Input Power ⁵ (CW)	+2 dBm
DC Operating Voltage	+16 V

5. Specified under matched load to 50 ohms.

6. Continuous operation is not recommended at these extremes. Permanent damage may occur if any of these limits are exceeded.




MEDIUM POWER, HIGH GAIN
Wideband Amplifier


ZVE-453G+
ZVE-453GX+

Mini-Circuits®

OUTLINE DRAWING FOR MODELS WITH HEATSINK & FAN (ZVE-453G+)

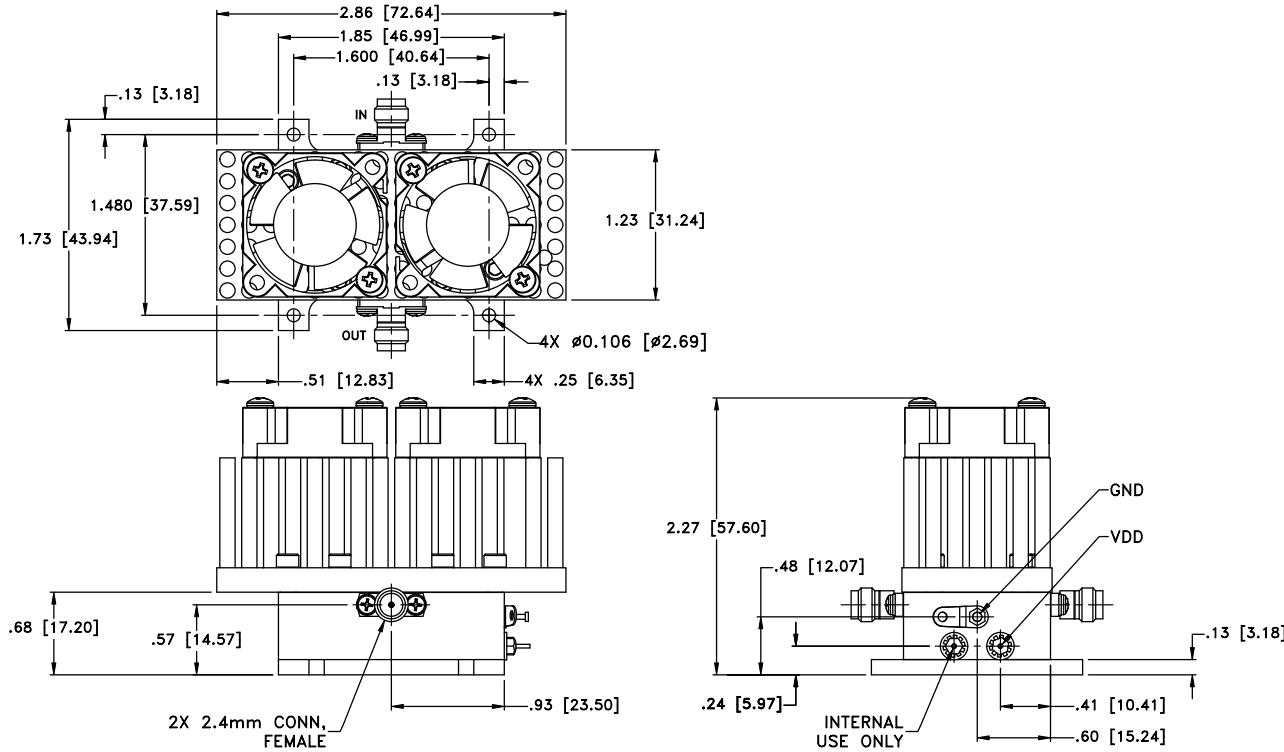

MOUNTING INFORMATION FOR MODELS WITHOUT HEATSINK & FAN (ZVE-453GX+)

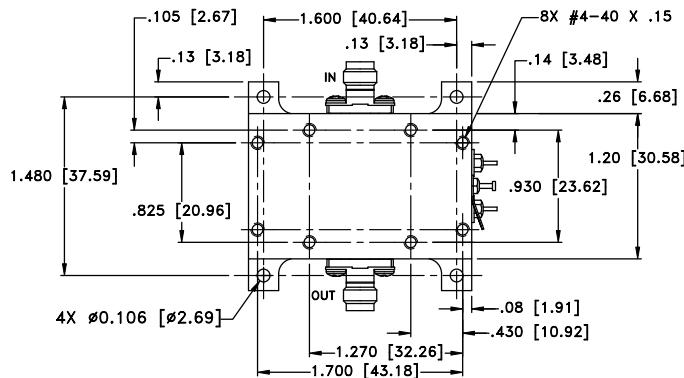

WT. GRAMS 160 grams; WITHOUT HEATSINK GRAMS 60 grams
Dimensions are in inches [mm]. Tolerances: 2 Pl. \pm .03; 3 Pl. \pm .015

Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

PAGE 3 OF 4