


REV.	DATE	ECR NO.	DESCRIPTION
NC	03/27/09	-	INITIAL RELEASE

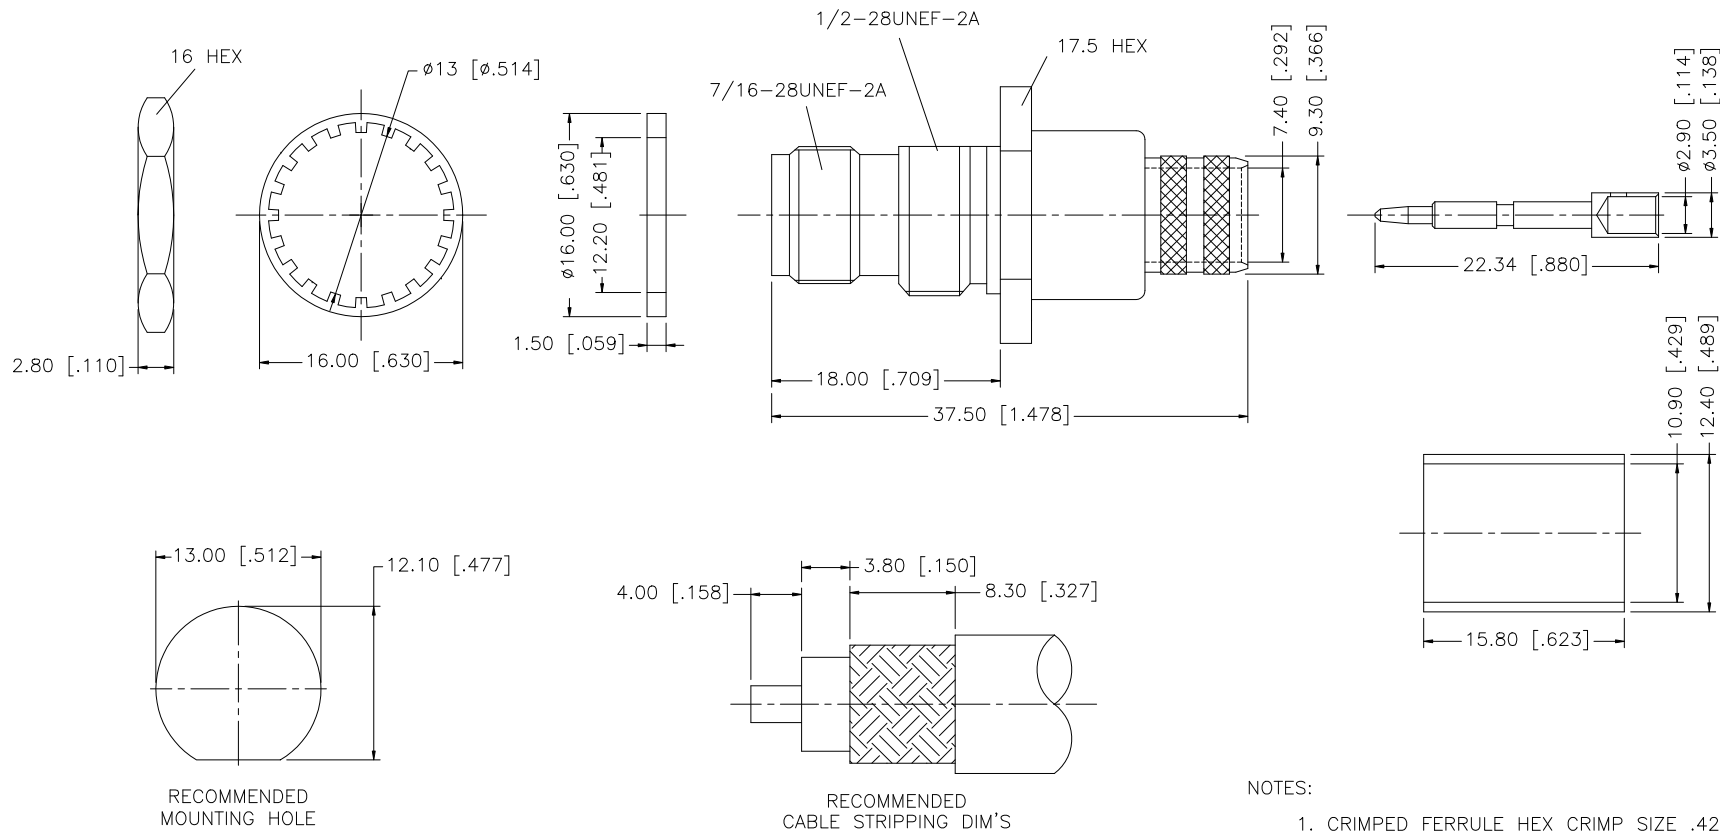

NOTES:

1. CRIMPED FERRULE HEX CRIMP SIZE .429" [10.89]
2. CRIMPED CONTACT PIN HEX CRIMP SIZE .118" [4.57]
3. MAX. PANEL THICKNESS = 3.5mm

QTY	DESCRIPTION	MATERIAL	FINISH	QTY	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	<h1 style="color: blue; margin: 0;">Amphenol Connex</h1>	
8									
7	FERRULE	COPPER	NICKEL	1	<p>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm</p> <p>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 ± 0.007" .315 - 1.180 ± 0.015" 1.180 - 4.724 ± 0.020"</p> <p>DO NOT SCALE DRAWING</p>	DRAWN	GRS	03/27/09	PART DESCRIPTION TNC REVERSE POLARITY BULKHEAD CRIMP JACK (FOR BELDEN 9913, 9914)
6	HEX NUT	BRASS	NICKEL	1		CHECKED			
5	LOCK WASHER	BRASS	NICKEL	1		ISSUED			
4	GASKET	RUBBER	RED	1		SHEET	1 OF 1		PART NO. 122405RP
3	CONTACT PIN	BRASS	GOLD	1		CAD FILE	C:/122/122405RP.DWG		
2	INSULATOR	PTFE	NATURAL	1					DWG. NO. 122405RP.DWG
1	BODY	BRASS	NICKEL	1					
	DESCRIPTION	MATERIAL	FINISH	QTY					REV. NC SIZE A SCALE NA