

Coaxial High Pass Filter

ZX75HP-2000+

50Ω 2000 to 3000 MHz

The Big Deal

- Low insertion loss
- Sharp rejection
- Connectorized package



CASE STYLE: KE1467

Product Overview

ZX75HP-2000+ is a High pass filter in a rugged connectorized package covering 2000 to 3000 MHz. This filter outstanding sharp rejection, low insertion loss and power handling for use in sub-harmonic rejection applications.

Key Features

Feature	Advantages
Low insertion loss	Can be used in high performance applications.
Good rejection	This enables the filter to attenuate spurious signals and reject harmonics for broad band frequency.
Connectorized package	The connectorized package is easy to interface with other devices and well suited for test setups.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Coaxial High Pass Filter

ZX75HP-2000+

50Ω 2000 to 3000 MHz



CASE STYLE: KE1467

Connectors SMA-M/F
Model ZX75HP-2000-S+

Features

- Low insertion loss
- Sharp rejection
- Connectorized package

Applications

- Sub-harmonic rejection
- Transmitter/ Receiver
- Lab use

Electrical Specifications at 25°C


Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Stop Band	Rejection Loss	DC-F1	DC-1600	20	34.3	-	dB
	VSWR	DC-F1	DC-1600	-	20	-	:1
Pass Band	Insertion Loss	F2-F3	2000-3000	-	0.9	2.0	dB
	VSWR	F2-F3	2000-3000	-	1.4	2.32	:1

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	2 W.

Permanent damage may occur if any of these limits are exceeded.

Functional Schematic

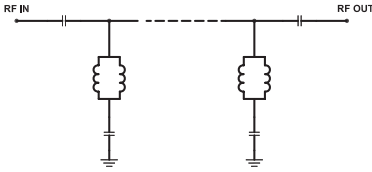





Typical Frequency Response



Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
1.0	110.47	1737.18
10.0	82.72	3170.90
300.0	53.73	709.71
800.0	61.86	204.17
1000.0	60.00	134.62
1240.0	59.83	83.73
1450.0	52.61	53.28
1600.0	39.91	34.89
1650.0	30.24	28.97
1710.0	20.96	21.35
1860.0	3.21	2.90
1900.0	1.55	1.63
1950.0	0.95	1.20
2000.0	0.81	1.22
2200.0	0.57	1.07
2400.0	0.52	1.24
2500.0	0.50	1.25
2750.0	0.42	1.15
2900.0	0.40	1.10
3000.0	0.40	1.15

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

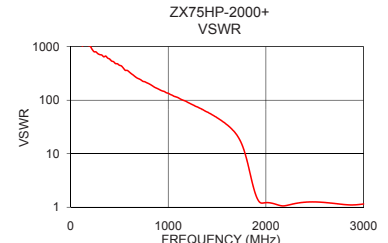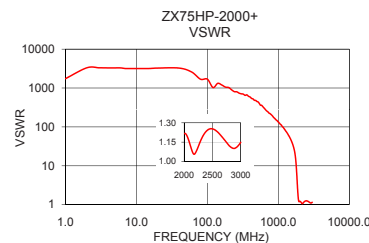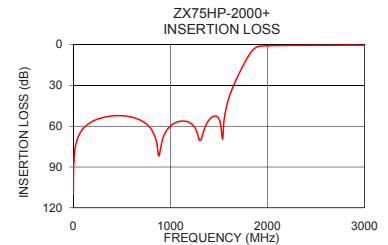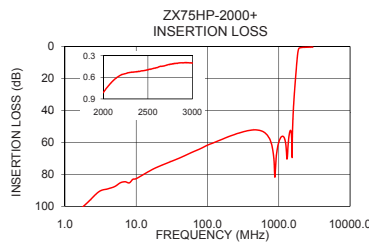

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV OR
M153317
ZX75HP-2000+
EDU2076/1
URJ
151031
Page 2 of 3