

© **Technical specification:**

Technische Daten:

Working voltage/
Betriebsspannung: 250 V AC

Initial contact
resistance/
Anfangs-
Durchgangswiderstand: $\leq 20 \text{ m}\Omega$

Temperature range/
Temperaturbereich: - 55 °C ... + 125 °C

Mating cycles/
Steckzyklen: Quality class 1 = 500
Gütestufe 1
Quality class 2 = 400
Gütestufe 2
Quality class 3 = 50
Gütestufe 3



**Materials/
Werkstoffe:**

Contact/
Kontakt: Cu alloy, Au over Ni


Insulator/
Isolierkörper: PBT GF UL 94 V-0, grey/grau

**Installation specification/
Montagedaten:**

PCB hole drillings/
Leiterplattenbohrbild: see sheet 2/
siehe Seite 2


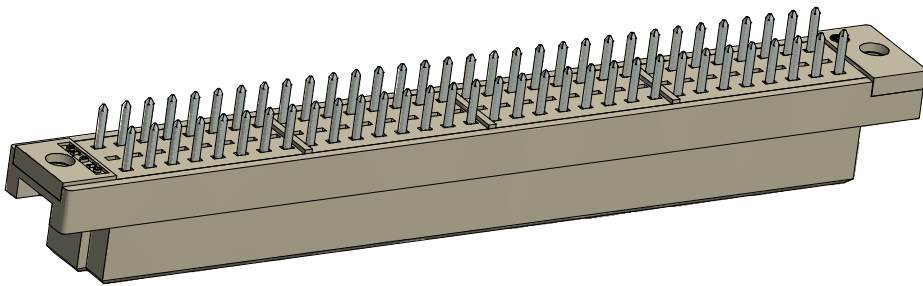
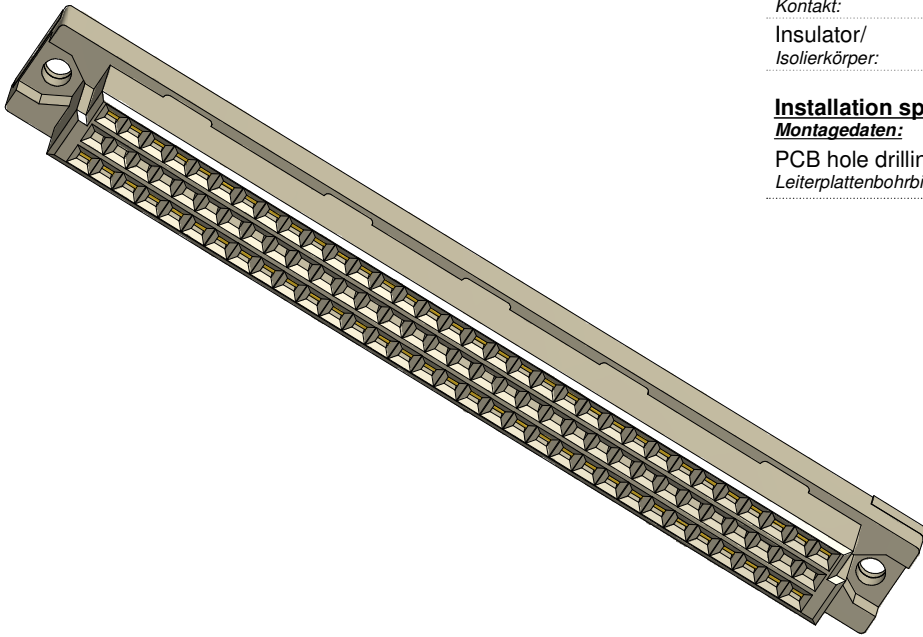


Part no. / Part marked / Art.-Nr. / Bedruckung:	Quality class / Gütestufe:	Contact plating / Kontakt Veredelung:
122A10299X	3	Gold over nickel / 50 mating cycles Gold über Nickel / 50 Steckzyklen
122B10299X	2	Gold over nickel / 400 mating cycles Gold über Nickel / 400 Steckzyklen
122C10299X	1	Gold over nickel / 500 mating cycles Gold über Nickel / 500 Steckzyklen

Index: c Ä6718 23.05.2017 J.L.		scale/Maßstab: 2 : 1		Female Connector Type "C" 64 pos. Solder straight Federleiste Type "C" 64 pol. Lötstift gerade		dwg no / Z.-nr.: 12K1A246	DIN- A3
Status: InBearbeitung	RoHS compliant/konform			dim. in mm Date/Datum: 26.03.03 Name: Schmidt appd./gepr.: 26.03.03 Kühle			

The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. We reserve the right to withdraw advertising and notices, without notice and without obligation, at any time.

PCB hole drillings (PCB top side)
 Leiterplattenbohrbild (Leiterplatten Oberseite)

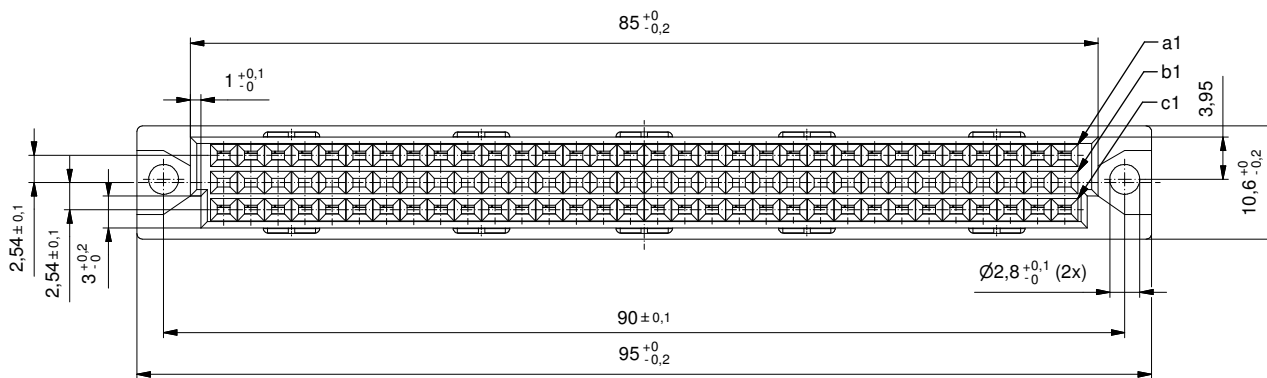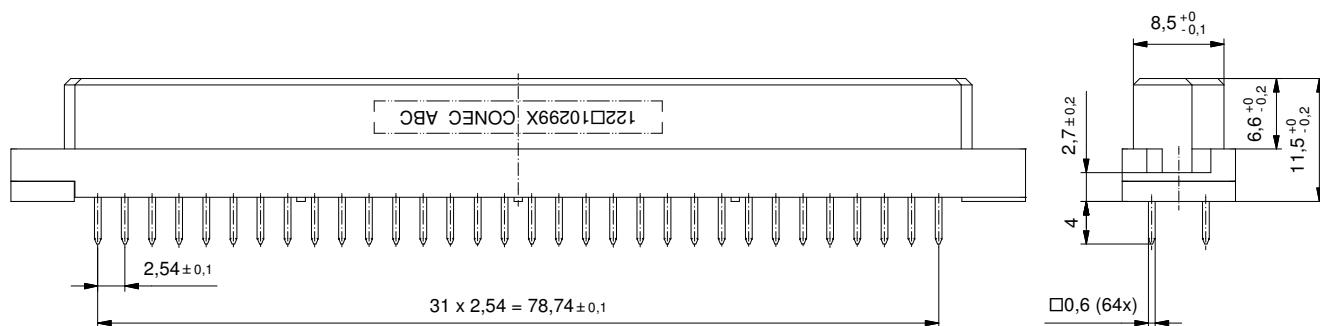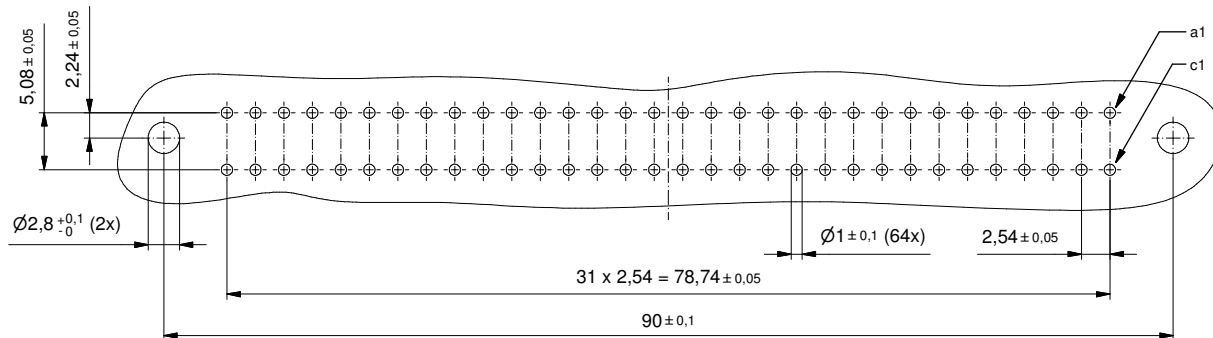

This reproduction, distribution and utilization of this document as well as the communication of its content to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. We reserve the right to remove additional data at any time without notice.

		dim. in mm		Female Connector Type "C" 64 pos. Solder straight <i>Federleiste Type "C"</i> 64 pol. Lötstift gerade				
		Date/Datum	Name					
		drawn/ gez.	26.03.03			Schmidt		
		appd./ gepr.	26.03.03			Kühle		
Index: c Ä6718 23.05.2017 J.L.	scale/Maßstab:			dwg no / Z.-nr.:	12K1A246	DIN- A3		
Status: InBearbeitung	2 : 1					2 / 2		
RoHS compliant/konform								