
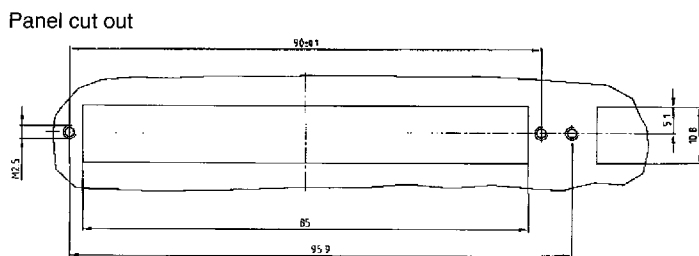
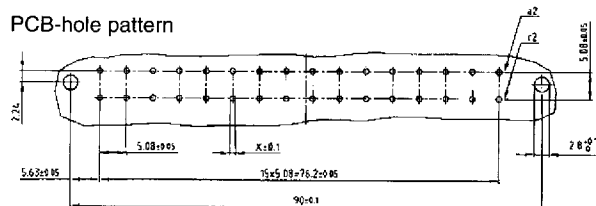


Female connector
two-sided spring
– Contact spacing
5.08 and 10.16 mm –

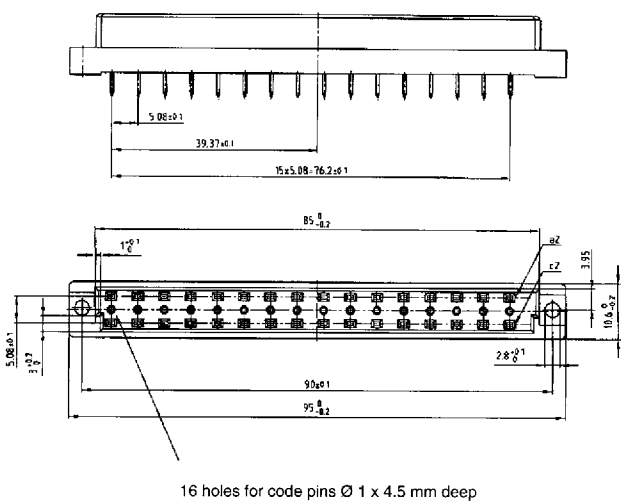

Kinds of contacts


Winding

Solder pin 4 mm $\square 1$ mm

Solder pin 4 mm $\square 0.6$ mm

Solder lug

Solder pin 4 mm $\square 1$ mm with clip

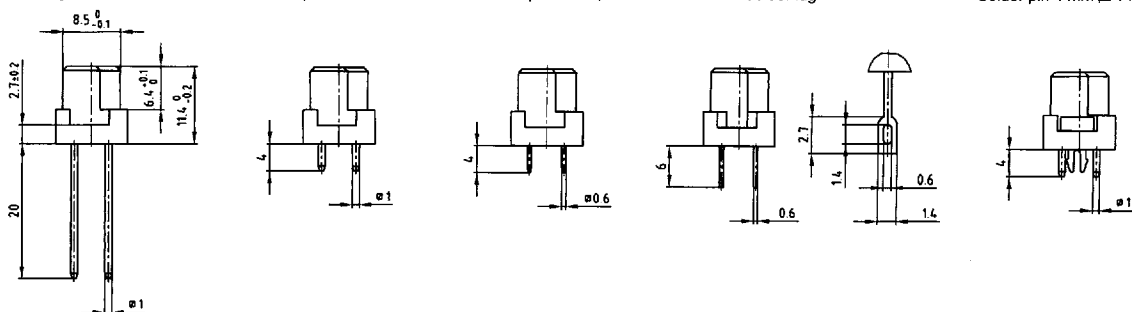


Kat 1 i 2HA

Part numbers

No. of Pos.	Version	Female connector type D, two-sided spring				
		Winding	Solder pin $\square 1$ mm	Solder pin $\square 0.6$ mm	Solder lug	Solder pin $\square 1$ mm with clip
16		D 16 F 3 WW a+c 122 A 10919 X	D 16 F 3 Pa+c 122 A 10939 X	D 16 F 3 Sa+c 122 A 13079 X	D 16 F 3 La+c 122 A 10959 X	D 16 F 3 PC a+c 122 A 13349 X
32		D 32 F 3 WW a+c 122 A 10929 X	D 32 F 3 Pa+c 122 A 10949 X	D 32 F 3 Sa+c 122 A 13089 X	D 32 F 3 La+c 122 A 10969 X	D 32 F 3 PC a+c 122 A 13359 X

Part Number

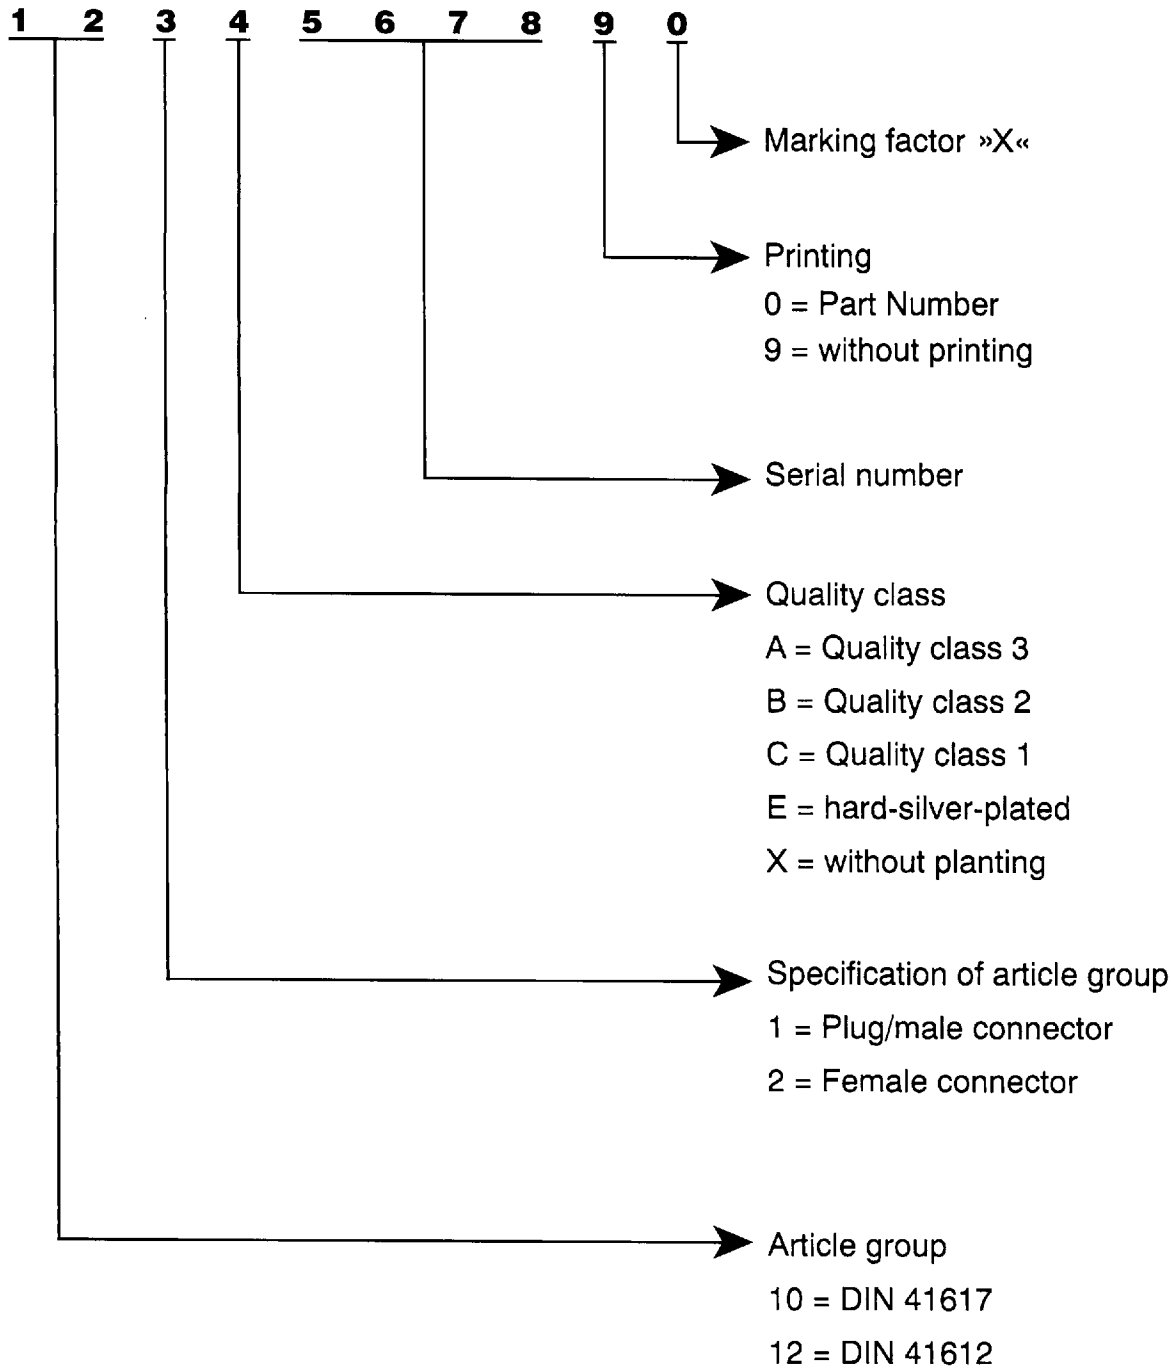

Order example

Male connector type C 64 pos. angled solder pin without printing	
Quality class	Part Number
3	C 64 M 3 A a + c 121 A 10139 X
2	C 64 M 2 A a + c 121 B 10139 X
1	C 64 M 1 A a + c 121 C 10139 X

■ 9017935 0000163 041 ■