DASH NO.	M CODE	MADE FROM

GSD

126-35-9

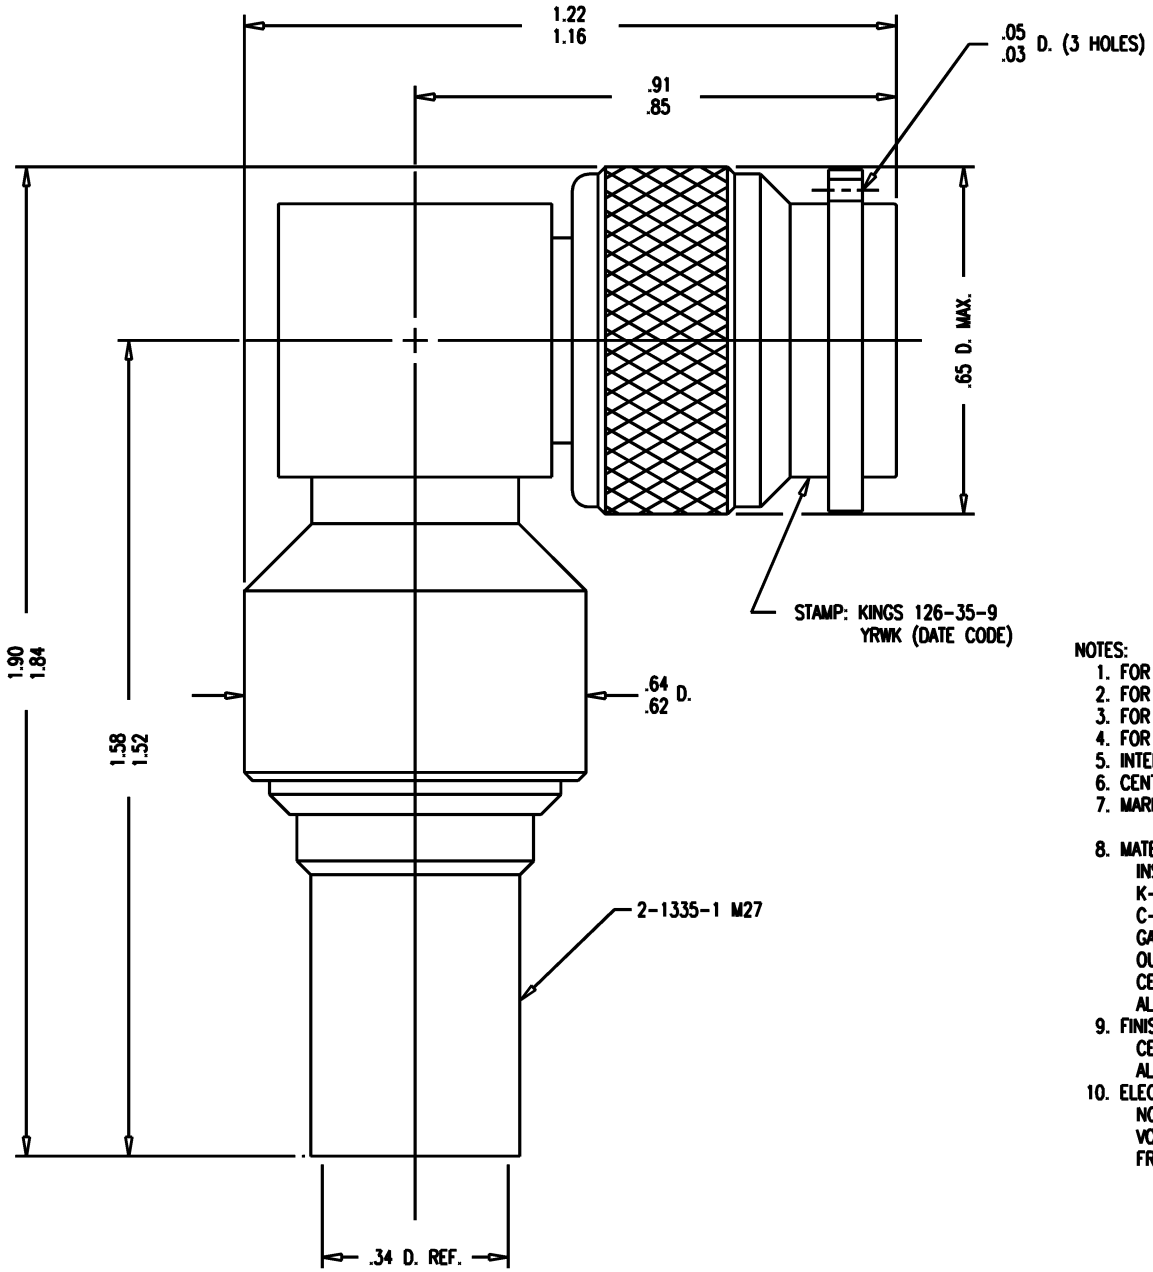

NOTES:

1. FOR USE WITH TIMES AA-5887 CABLE.
2. FOR CABLING INSTRUCTIONS SEE 3-440-2.
3. FOR CABLE TRIMMING USE KTJ-150 & KTD-138.
4. FOR CRIMPING USE DIE KTH-1077.
5. INTERFACE PER MIL-STD-348, FIG. 313-1.
6. CENTER CONTACT (1-5704-2MA9) SUPPLIED UNASSEMBLED.
7. MARK PACKAGE: KINGS 126-35-9
   XX XX (DATE CODE)
8. MATERIALS:
   INSULATORS: TEFLON, ASTM-D-1457
   K-GRIP SLEEVE: COM. BRONZE TUBE, ALLOY 220
   C-RING: PHOS. BRONZE, QQ-B-750
   GASKET: SIL. RUB., ZZ-R-765
   OUTER CONTACT } BER. COP., ASTM-B-196
   CENTER CONTACT }
   ALL OTHER METAL PARTS: BRASS, ASTM-B16
9. FINISHES:
   CENTER CONTACTS: HARD GOLD PLATE PER MIL-G-45204
   ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
10. ELECTRICAL CHARACTERISTICS:
   NOMINAL IMPEDANCE: 50 OHMS
   VOLTAGE RATING: 500 VRMS
   FREQUENCY RANGE: DC TO 11 GHz

GSD

REVISIONS

ISSUE	CHANGES
1	CN 34481 C REDRAWN JCA 05/28/93
2	CN 38226 C BDH 02/27/01

JCA3917

SCALE	4:1
APPROX SURFACE AREA	
WAS:	E-15911
USED ON	
REF:	

PLUG, ANGLE, TNC

DRAWN	JCA	DATE	05/28/93
DESIGN	MJB	DATE	07/23/93
APPR.		DATE	

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

126-35-9

MAY 2007 THIS DRAWING BECAME THE PROPERTY OF PROPERTY OF
WINCHESTER ELECTRONICS CORPORATION, WALLINGFORD, CT 06492