




Ultra Low Profile 0404 Balun
50Ω to 75Ω Balanced

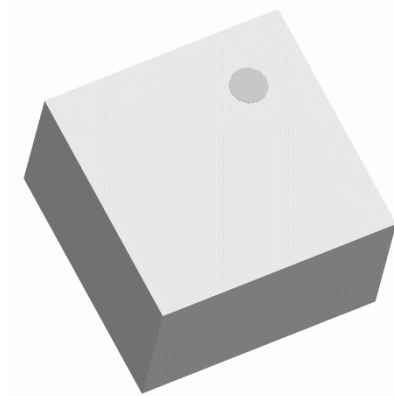

Description:

The BD2425N5075AHF is a low cost, low profile sub-miniature unbalanced to balanced transformer designed for differential inputs and output locations on modern chipsets in an easy to use surface mount package. The BD2425N5075AHF is halogen-free, ideal for high volume manufacturing and delivers higher performance than traditional ceramic baluns. The BD2425N5075AHF has an unbalanced port impedance of 50Ω and a 75Ω balanced port impedance. This transformation enables single ended signals to be applied to differential ports on modern integrated chipsets. The output ports have equal amplitude (-3dB) with 180 degree phase differential. The BD2425N5075AHF is available on tape and reel for pick and place high volume manufacturing.


Detailed Electrical Specifications:

Specifications subject to change without notice.







Features:	Parameter	ROOM (25°C)			Unit	
		Min.	Typ.	Max		
<ul style="list-style-type: none"> • 2400 – 2500 MHz • 0.56mm Height Profile • 50 Ohm to 2 x 37.5 Ohm • Low Insertion Loss • 802.11 b+g • MIMO b+g • Bluetooth • Zigbee • Surface Mountable • Tape & Reel • Non-conductive surface • RoHS Compliant • Halogen-Free 	Frequency	2400		2500	MHz	
	Unbalanced Port Impedance		50		Ω	
	Balanced Port Impedance			75		Ω
	Return Loss	14	18		dB	
	Insertion Loss*		0.7	0.9	dB	
	Amplitude Balance		0.3	0.9	dB	
	Phase Balance		1	3	Degrees	
	CMRR			35	dB	
	Power Handling			1	Watts	
	Operating Temperature		-55		+85	°C

*Insertion Loss stated at room temperature (Insertion Loss is approximately 0.1 dB higher at +85 °C)


Outline Drawing:

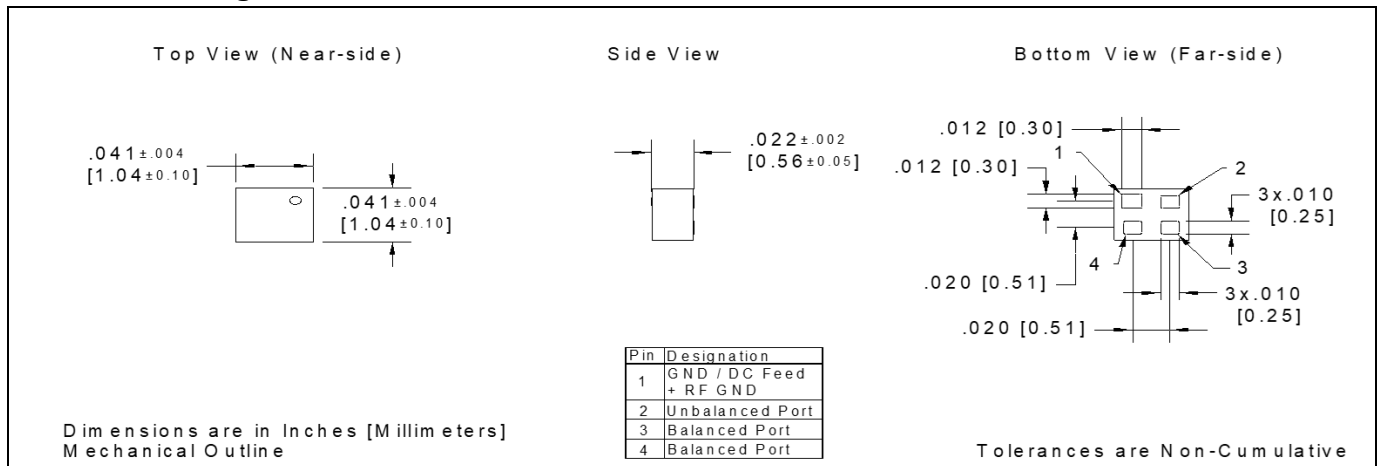

Typical Performance: 2300 MHz. to 2600 MHz.

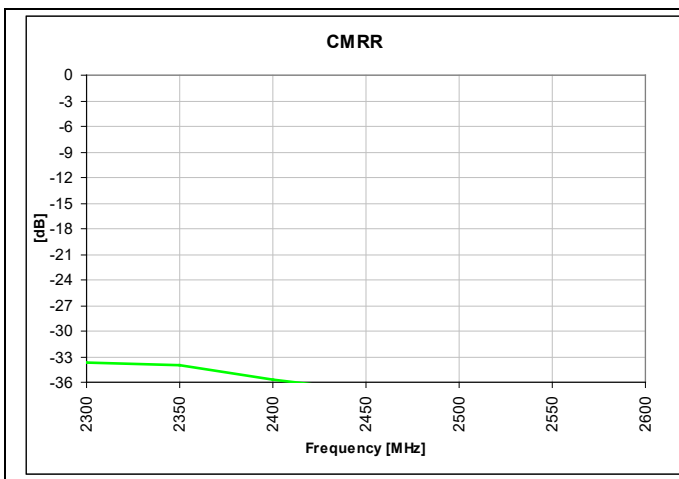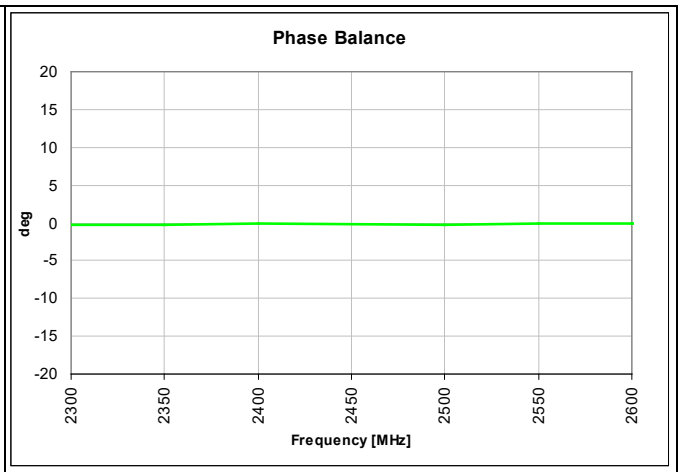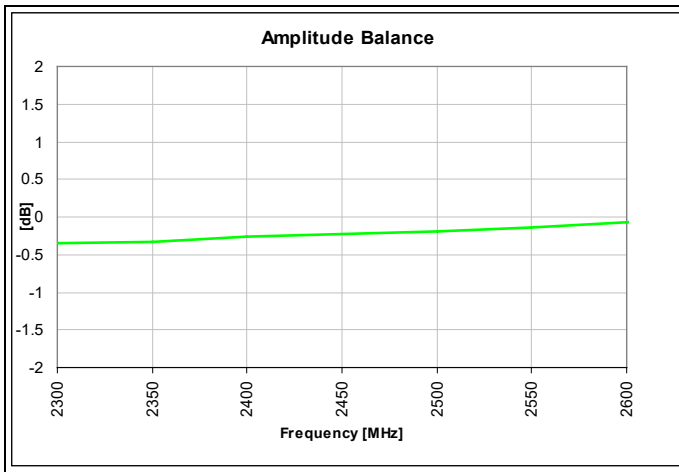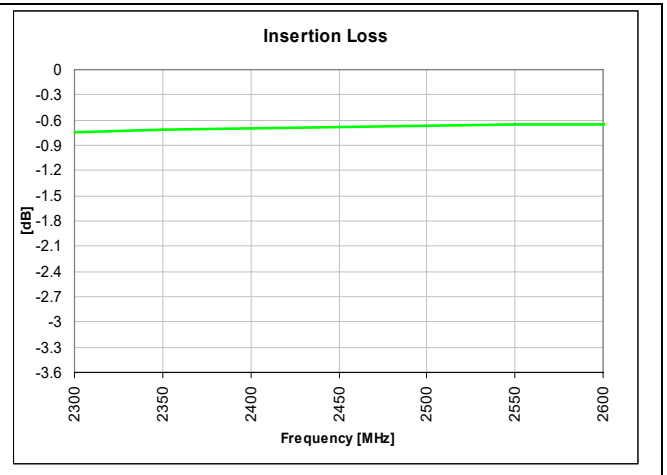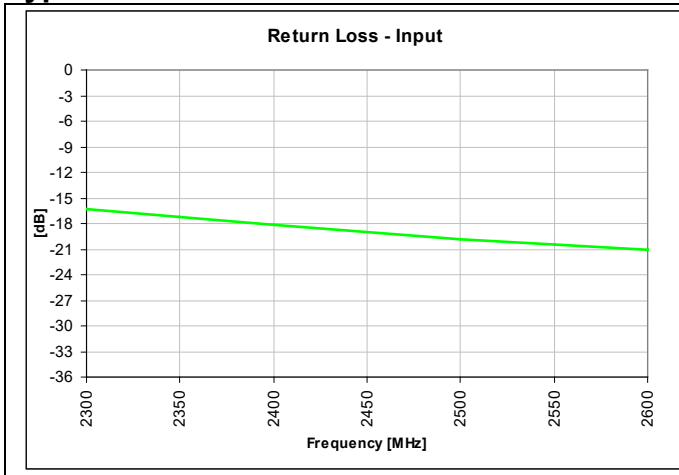

Wide Band Performance: 500 MHz. to 8500 MHz.

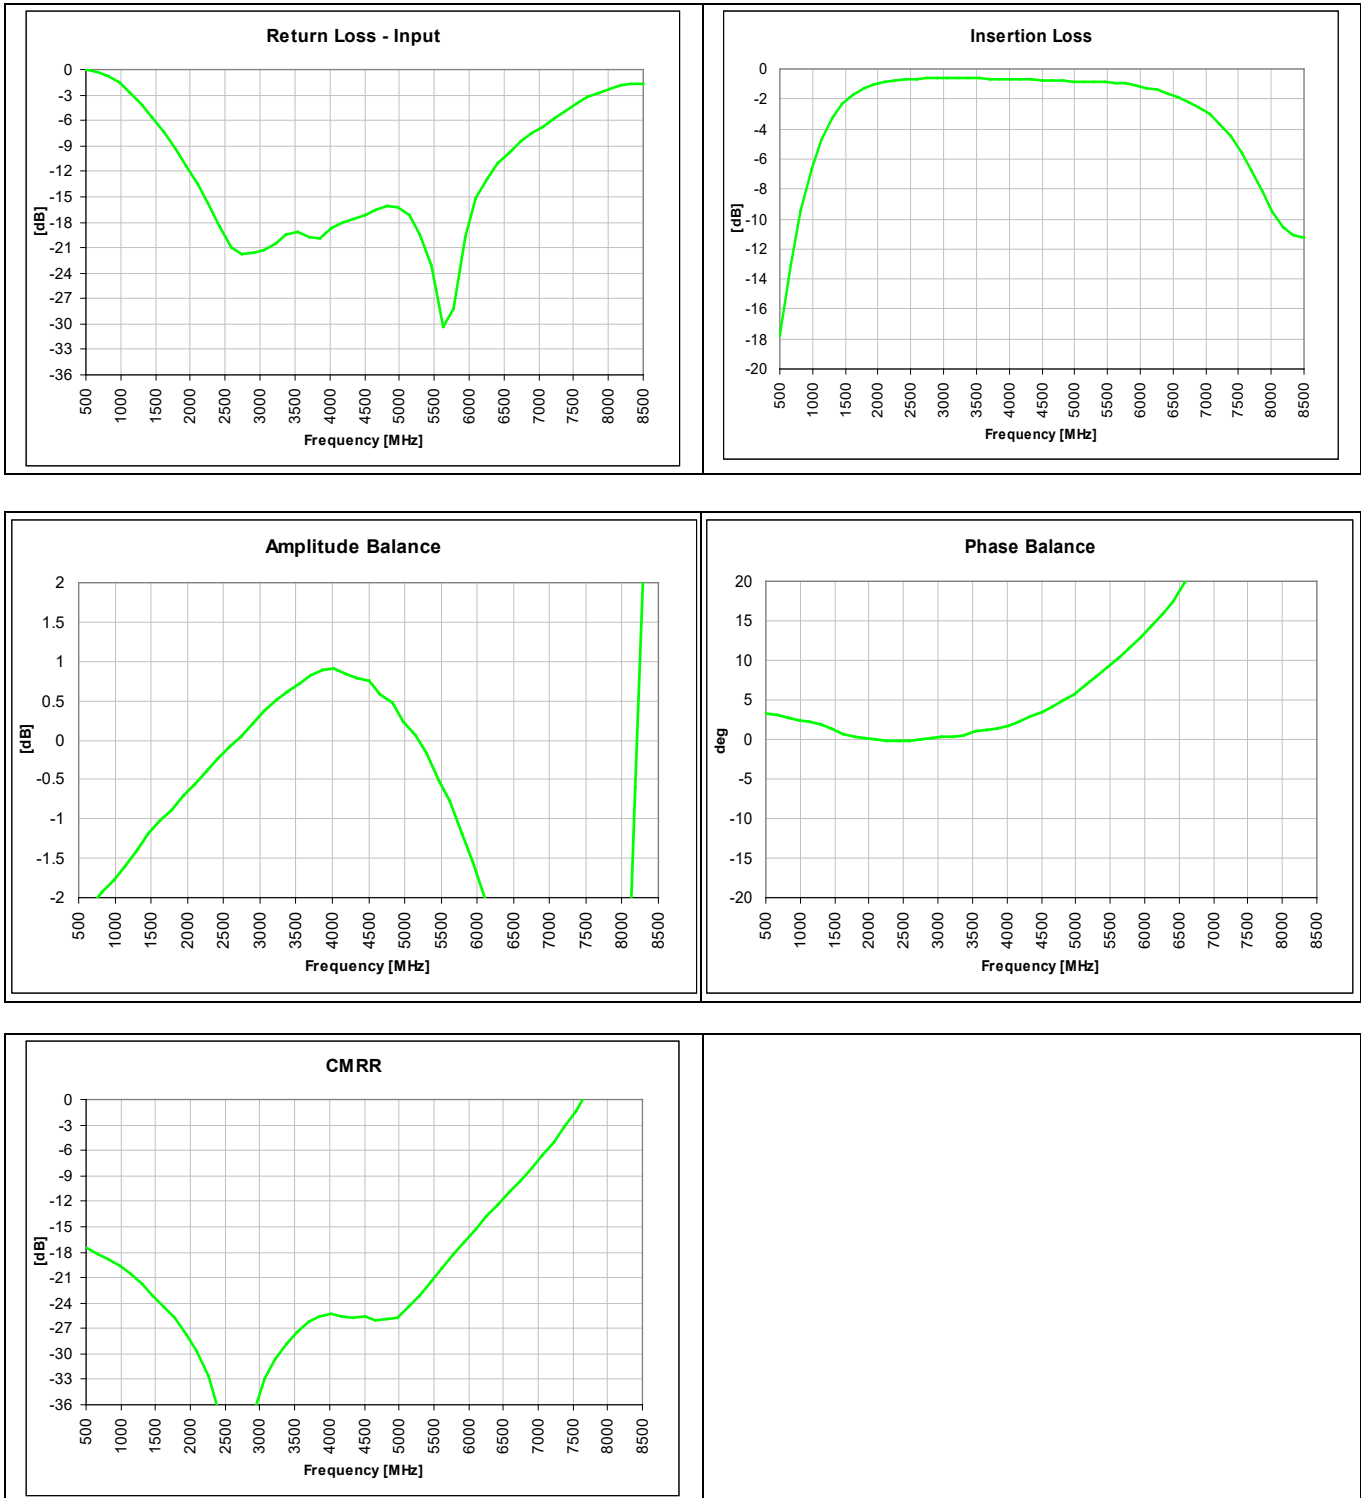

Mounting Configuration:

In order for Xinger surface mount components to work optimally, the proper impedance transmission lines must be used to connect to the ports. If this condition is not satisfied, insertion loss, Isolation and VSWR may not meet published specifications.

All of the Xinger components are constructed from ceramic filled PTFE composites which possess excellent electrical and mechanical stability.

An example of the PCB footprint used in the testing of these parts is shown below. An example of a DC-biased footprint is also shown below. In specific designs, the transmission line widths need to be adjusted to the unique dielectric coefficients and thicknesses as well as varying pick and place equipment tolerances.

