



# EV8634B-LE-00A

## High Efficiency 16V, 20A Synchronous Step-Down Converter Evaluation Board

### DESCRIPTION

The EVQ8634B-LE-00A is an evaluation board for the MPQ8634B, a high efficiency, monolithic, synchronous step-down converter.

The EV board can deliver 20A continuous load current over a wide operating input range. High efficiency can be achieved over a wide output current load range.

The MPQ8634B adopts internally compensated constant-on-time (COT) control mode that provides fast transient response and eases loop stabilization.

This EV board can be turned on or off via a remote ON/OFF input (EN) that is referenced to ground. This input is compatible with popular logic devices.

### ELECTRICAL SPECIFICATION

Parameter	Symbol	Value	Units
Input Voltage	$V_{IN}$	8-16	V
Output Voltage	$V_{OUT}$	1	V
Output Current	$I_{OUT}$	20	A

### FEATURES

- Wide Input Voltage Range from 2.7V:
  - 2.7V to 16V with External 3.3V VCC Bias
  - 4V to 16V with Internal VCC Bias or External 3.3V VCC Bias
- Differential Output Voltage Remote Sense
- Programmable Accurate Current Limit Level
- 20A Output Current
- Low  $R_{DS(ON)}$  Integrated Power MOSFETs
- Proprietary Switching Loss Reduction Technique

- Adaptive COT for Ultrafast Transient Response
- Stable with Zero-ESR Output Capacitor
- 0.5% Reference Voltage Over 0°C to +70°C Junction Temperature Range
- 1% Reference Voltage Over -40°C to +125°C Junction Temperature Range
- Selectable Pulse-Skip or Forced-CCM Operation
- Excellent Load Regulation
- Output Voltage Tracking
- Output Voltage Discharge
- PGOOD Active Clamped Low Level during Power Failure
- Programmable Soft Start Time from 1ms
- Pre-Bias Start up
- Selectable Switching Frequency of 600kHz, 800kHz and 1000kHz
- Non-latch OCP, UVP, UVLO, Thermal Shutdown, and Latch-off for OVP
- Output Adjustable from 0.9V to 90%\* $V_{in}$ , Up to 5.5V max.
- Available in a QFN3X4 mm Package


### APPLICATIONS

- Telecom System and Networking Systems
- Servers, Cloud-Computing, Storage
- Base Stations
- General Purpose Point-of-Load (PoL)
- 12V Distribution Power Systems
- High-end TV
- Game Consoles and Graphic Cards

All MPS parts are lead-free, halogen free, and adhere to the RoHS directive. For MPS green status, please visit MPS website under Quality Assurance.

"MPS" and "The Future of Analog IC Technology" are Registered Trademarks of Monolithic Power Systems, Inc.


EV8634B-LE-00A EVALUATION BOARD

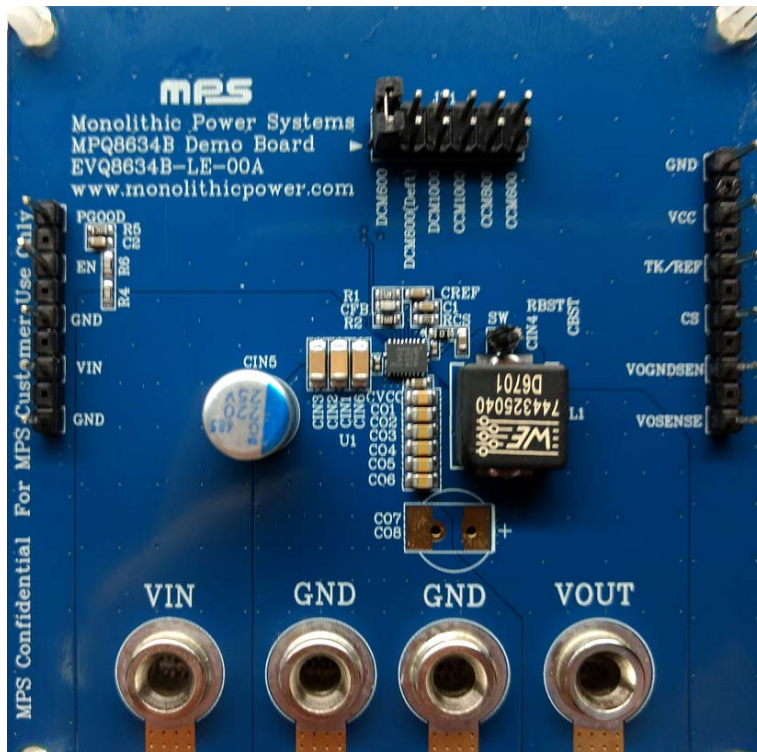

(L x W x H)81.3 mm x 77.5mm x 1.6 mm

Board Number	MPS IC Number
EVQ8634B-LE-00A	MPQ8634BGLE

### EVALUATION BOARD SCHEMATIC

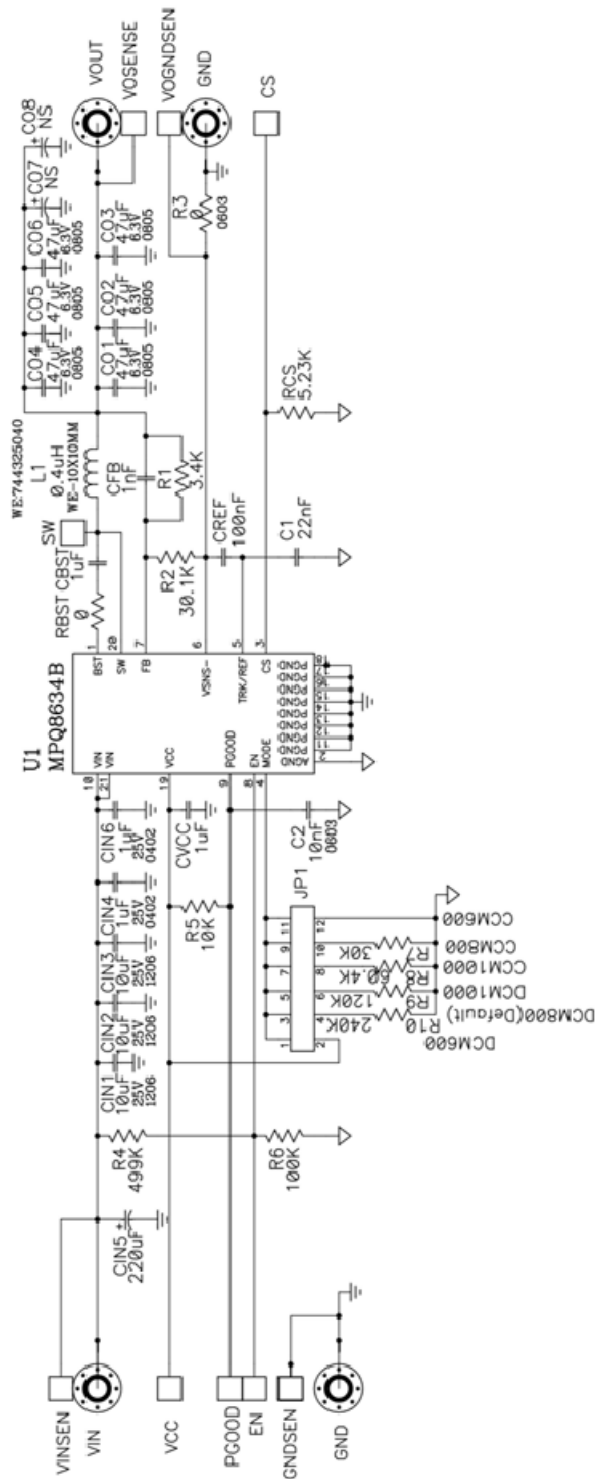

**BILL OF MATERIALS**

Qty	Ref	Value	Description	Package	Manufacturer	Part Number
1	C1	22nF	CAP, 25V, 10%, X7R	CAP0603	Generic	
1	C2	10nF	CAP CER 1nF 25V 10% X7R 0603	CAP0603	Generic	
2	CBST, CVCC	1µF	CAP CER 1µF 6.3V 10% X7R 0603	CAP0603	Generic	
1	CFB	1nF	CAP, 50V, 10%, X7R	CAP0603	Generic	
3	CIN1, CIN2, CIN3	10µF	Capacitor, 25V, X7R, 10%	CAP1206	Murata or Generic	GRM31CR71E106KA12L
2	CIN4, CIN6	1µF/25V	CAP CER 1µF 25V 10% X6S 0402	CAP0402	Murata or Generic	GRM155C81E105KE11D
1	CIN5	220µF	220µF, 25V, 16mΩ ESR	D8P3.5mm	Chemi-Con or Generic	APSG250ELL221MHB5S
6	CO1, CO2, CO3, CO4, CO5, CO6	47µF	CAP, 6.3V, X5R, 20%	CAP0805	Murata or Generic	GRM21BR60J476ME15L
1	CO7	NS		D2		
1	CO8	NS		D8P3.5mm		
1	CREF	100nF	CAP CER 0.1µF 25V 10% X7R 0603	CAP0603	Generic	
1	L1	0.4µH	Inductor	10x10mm	Würth or Generic	WE-744325040
1	R1	3.4K	Film Res., 1%	0603	Generic	
1	R2	30.1k	Film Res., 1%	0603	Generic	
2	R3, RBST	0	Film Res., 5%	0603	Generic	
1	R4	499K	Film Res., 1%	0603	Generic	
1	R5	10K	Film Res., 1%	0603	Generic	
1	R6	100K	Film Res., 1%	0603	Generic	
1	R7	30K	Film Res., 1%	0603	Generic	
1	R8	60.4K	Film Res., 1%	0603	Generic	
1	R9	120K	Film Res., 1%	0603	Generic	
1	R10	240K	Film Res., 1%		Generic	
1	RCS	5.23K	Film Res., 1%	0603	Generic	
1	U1	MPQ8634BGL E	16V/20A Step Down Converter	QFN21-3x4mm	MPS	MPQ8634BGLE


## EVB TEST RESULTS

Performance waveforms are tested on the EV8634B-LE-00A evaluation board.

$V_{IN} = 12V$ ,  $V_{OUT} = 1V$ ,  $L = 400nH$ ,  $T_A = +25^{\circ}C$ , unless otherwise noted.


**Efficiency**

Pulse Skip, 0.4 $\mu$ H, 800kHz

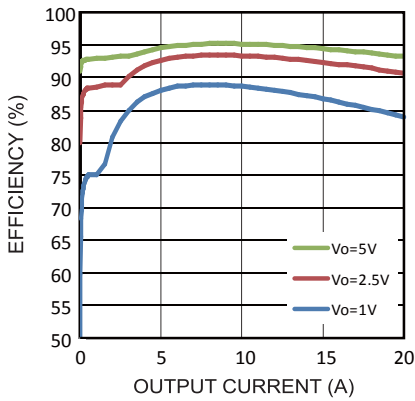


**Efficiency**

Forced CCM, 0.4 $\mu$ H, 800kHz

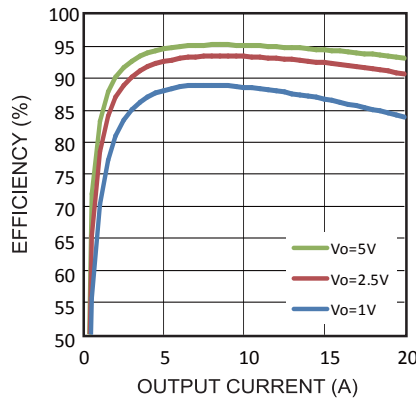


**Thermal Results**

800kHz, no Air-flow

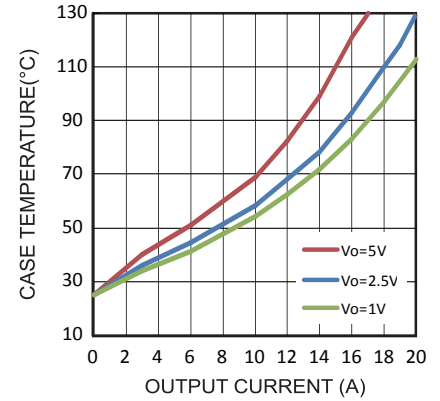


**Switching Frequency vs. Output Current**

Forced CCM

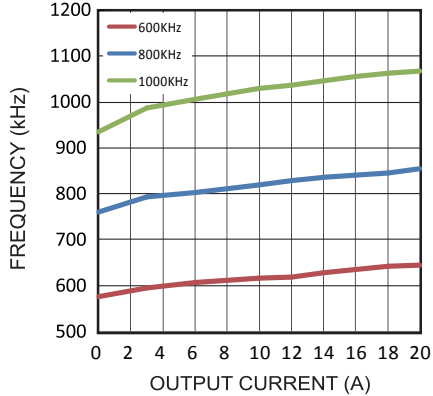


**Output Voltage Load Regulation**

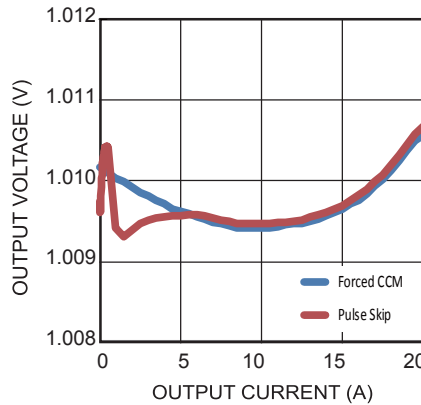


**Switching Frequency vs. Input Voltage**

$V_{OUT} = 1V$ , 3A Load

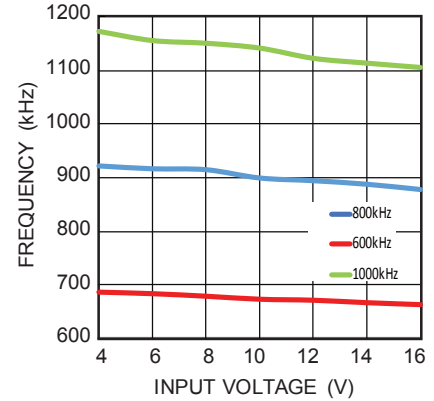

**Switching Frequency vs. Output Voltage**










$V_{OUT} = 12V$ , 3A Load

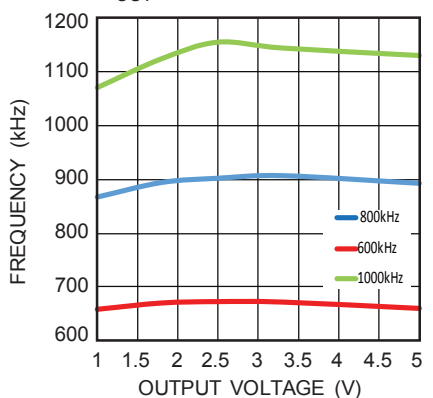

**EVB TEST RESULTS (continued)**

Performance waveforms are tested on the EVQ8634B-LE-00A evaluation board.


 $V_{IN} = 12V$ ,  $V_{OUT} = 1V$ ,  $L = 400nH$ ,  $T_A = +25^{\circ}C$ , unless otherwise noted.

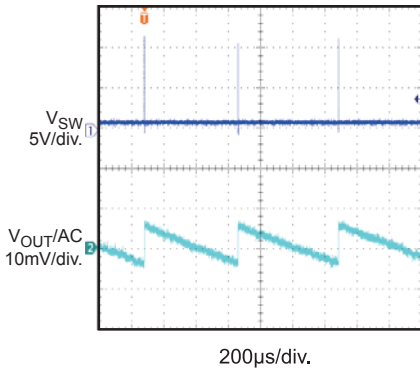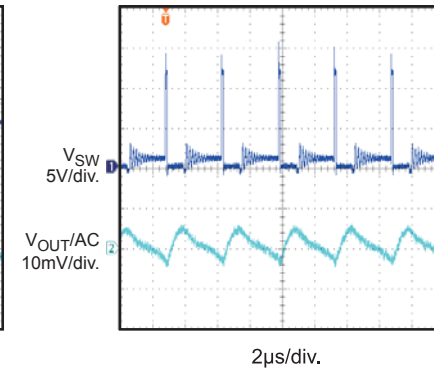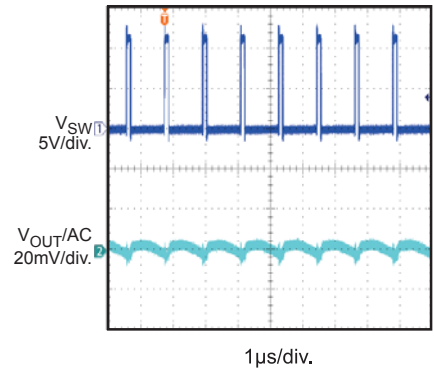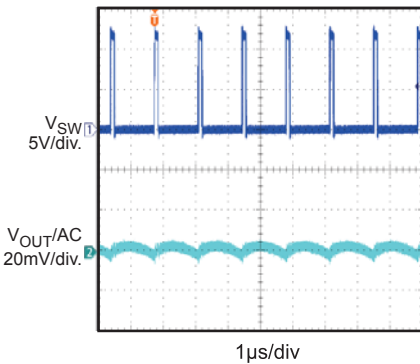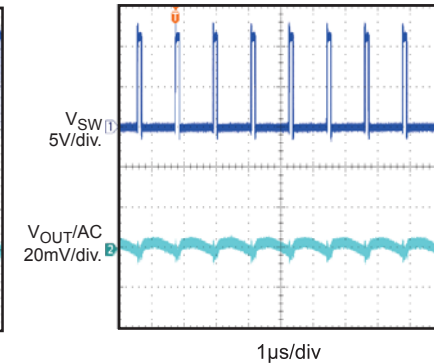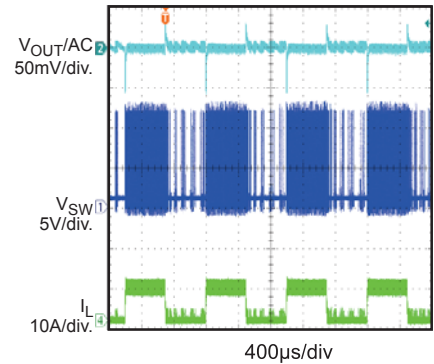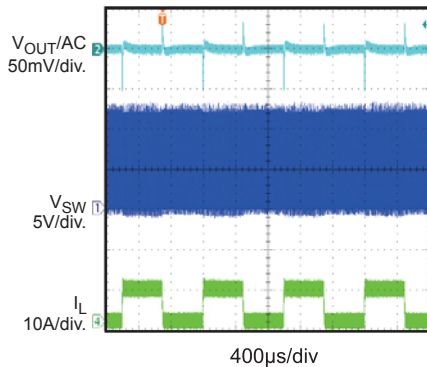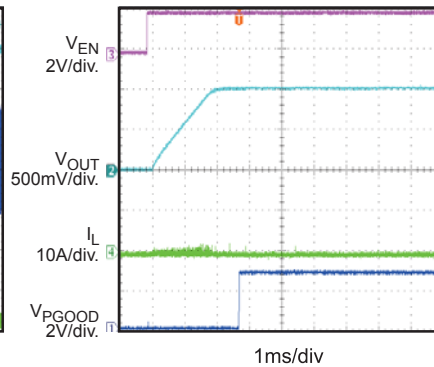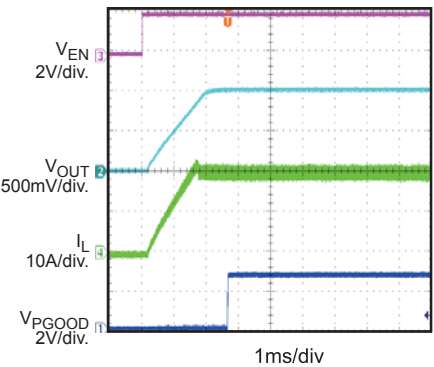**Steady State**
 $I_{OUT} = 0A$ , Pulse Skip

**Steady State**
 $I_{OUT} = 0.5A$ , Pulse Skip

**Steady State**
 $I_{OUT} = 20A$ , Pulse Skip

**Steady State**
 $I_{OUT} = 0A$ , Forced CCM

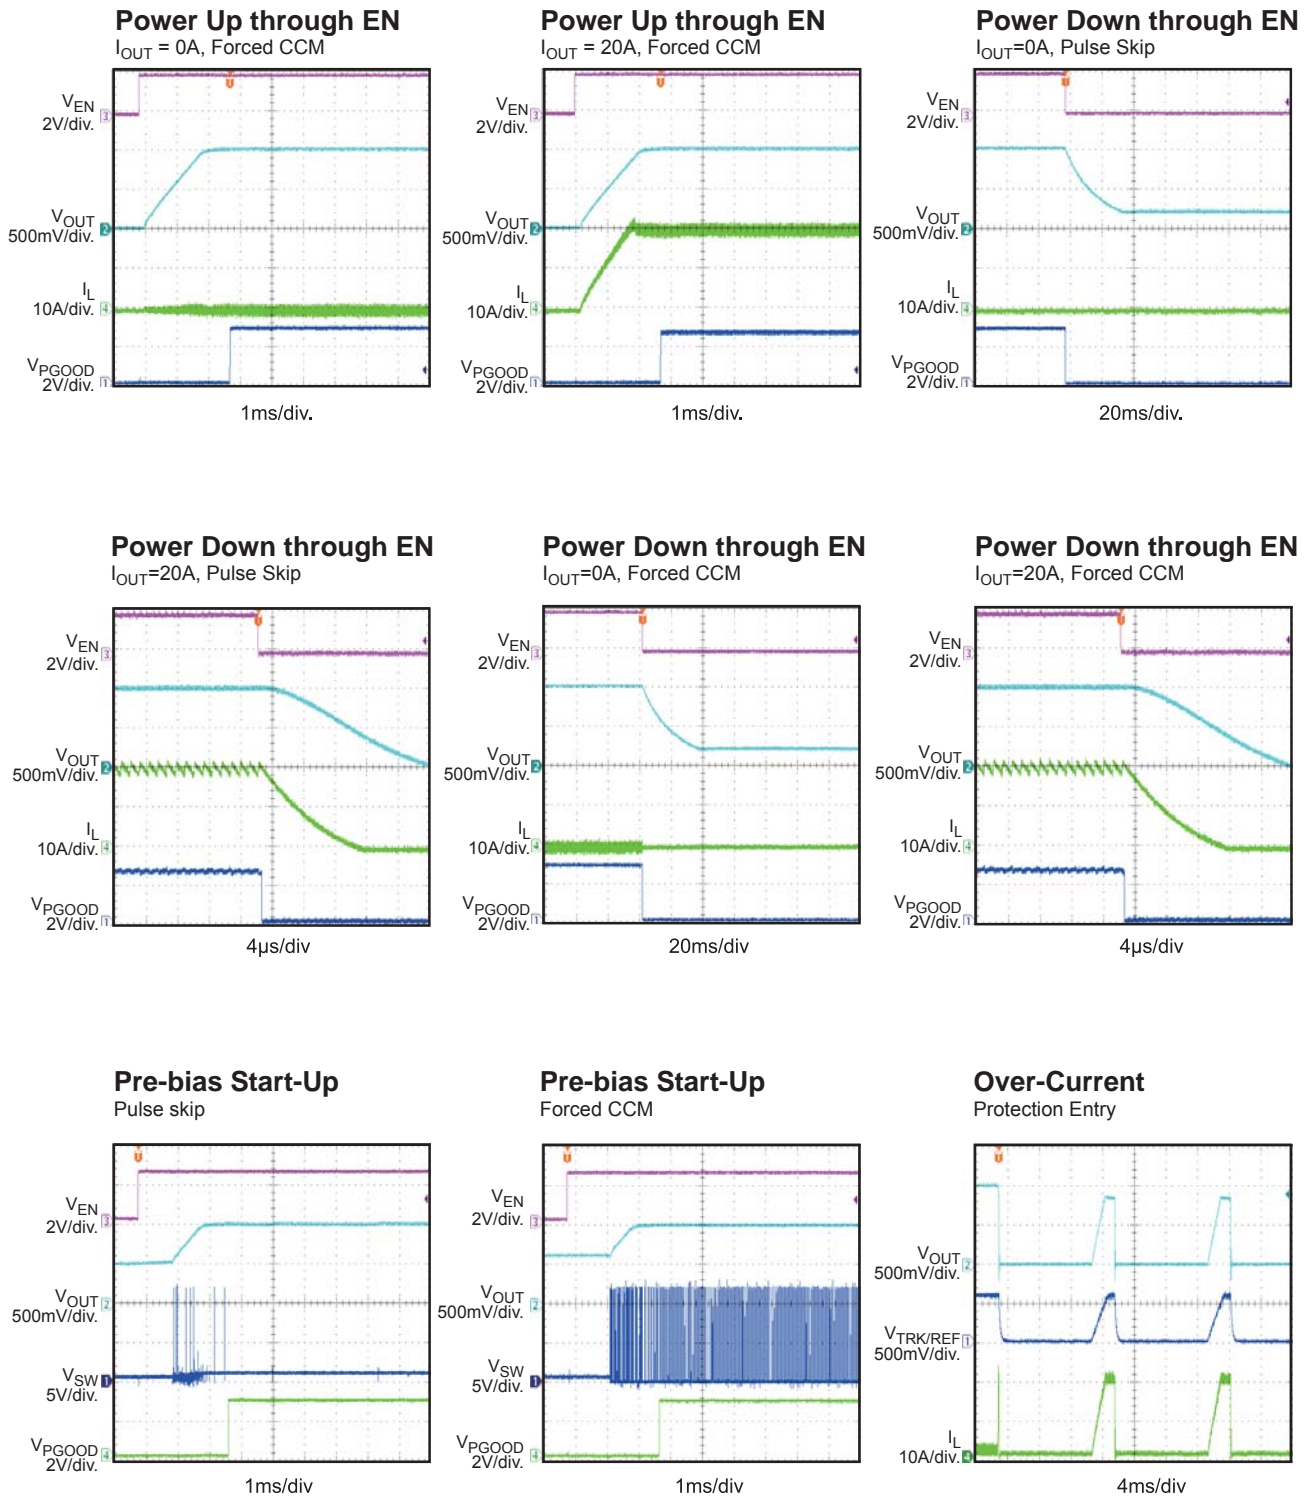**Steady State**
 $I_{OUT} = 20A$ , Forced CCM

**Load Transient**
 $I_{OUT} = 0A \sim 8A$ , Pulse Skip

**Load Transient**
 $I_{OUT} = 0A \sim 8A$ , Forced CCM

**Power Up through EN**
 $I_{OUT} = 0A$ , Pulse Skip

**Power Up through EN**
 $I_{OUT} = 20A$ , Pulse Skip


**EVB TEST RESULTS** *(continued)*

Performance waveforms are tested on the EVQ8634B-LE-00A evaluation board.

$V_{IN} = 12V$ ,  $V_{OUT} = 1V$ ,  $L = 400nH$ ,  $T_A = +25^{\circ}C$ , unless otherwise noted.




**EVB TEST RESULTS** *(continued)*


Performance waveforms are tested on the EVQ8634B-LE-00A evaluation board.

$V_{IN} = 12V$ ,  $V_{OUT} = 1V$ ,  $L = 400nH$ ,  $T_A = +25^{\circ}C$ , unless otherwise noted.


**Over-Current**  
Protection Recovery

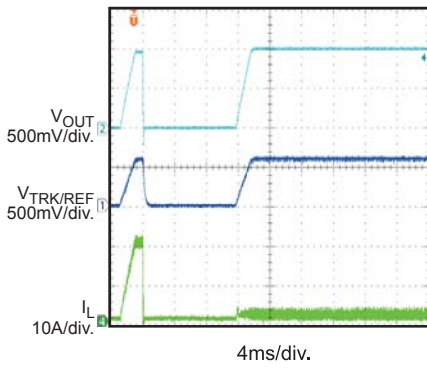


**OSM Operation**  
Pulse Skip Mode

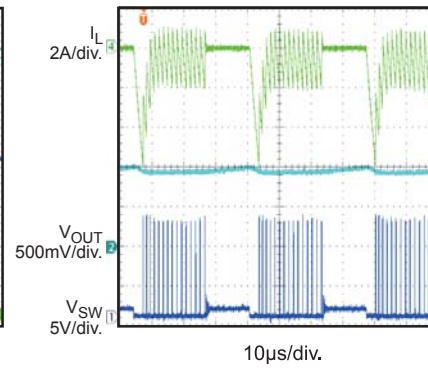

**Over-voltage Protection**  
Pulse Skip Mode

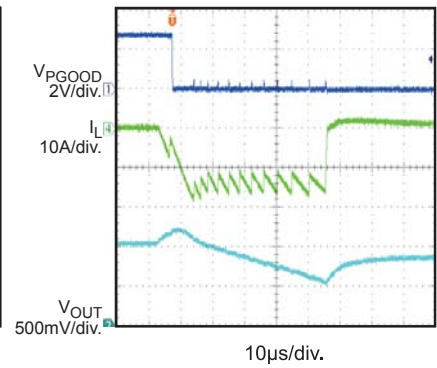

**Over-voltage Protection**  
Forced CCM

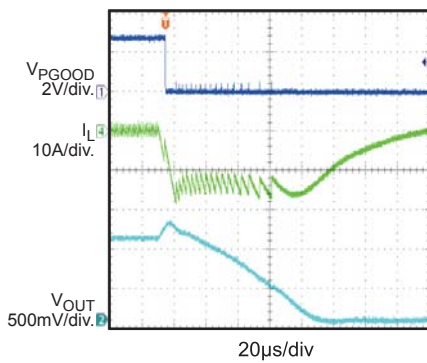



PRINTED CIRCUIT BOARD LAYOUT

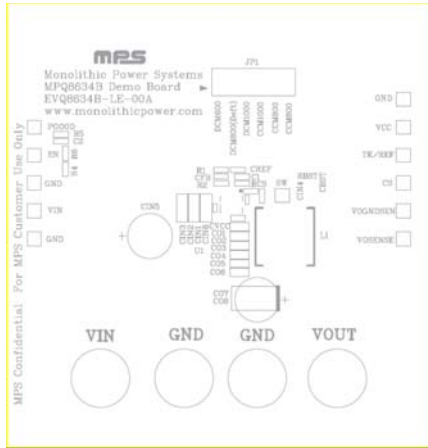


Figure 1—Top Silk Layer

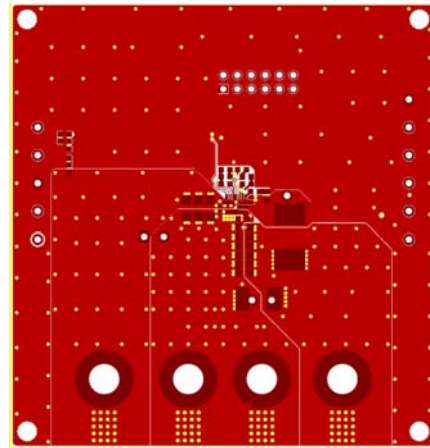


Figure 2—Top Layer

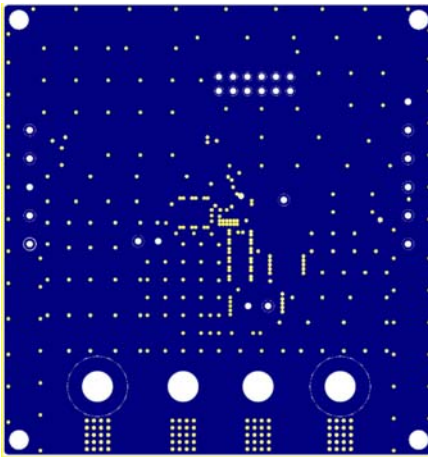


Figure 3—Inner Layer 1

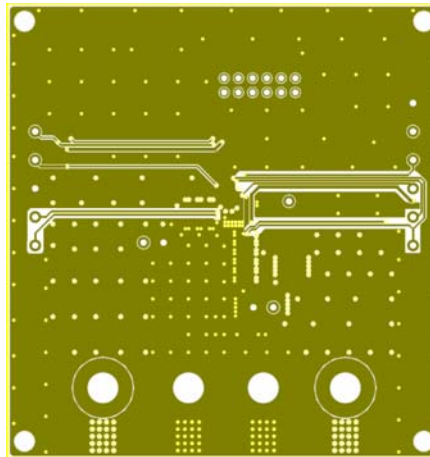


Figure 4— Inner Layer 2

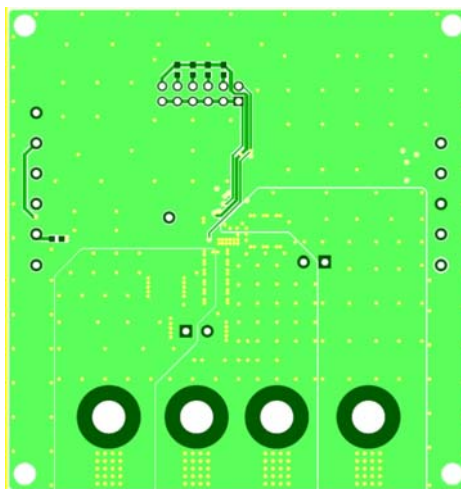


Figure 5—Bottom Layer