



NOTES: UNLESS OTHERWISE SPECIFIED

1. FOR USE WITH RG-174/U, 188A/U, 316/U OR EQUIVALENT
2. MATERIAL SPECIFICATIONS:
INSULATOR: PTFE, COLOR - NATURAL
CONTACT: BERYLLIUM COPPER
ALL OTHER METAL PARTS: BRASS
3. FINISH SPECIFICATIONS:
CONTACT: .000003 MIN THICK GOLD OVER .000050 MIN THICK NICKEL
ALL OTHER METAL: THIN GOLD OVER .000050 MIN THICK COPPER
4. ELECTRICAL SPECIFICATIONS:
IMPEDANCE: 50 OHMS
5. CONTACT AND FERRULE SHIPPED LOOSE.
6. CRIMP FERRULE (.128 HEX) AND SOLDER TO CONTACT.

REV	DESCRIPTION	BY DATE	APPD
A	ER056138	JL 12/16/14	SK

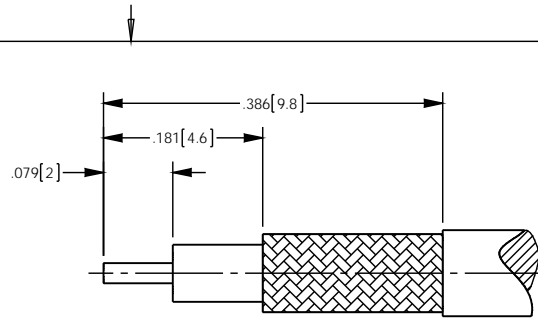

RECOMMENDED CABLE STRIPPING DIM'S

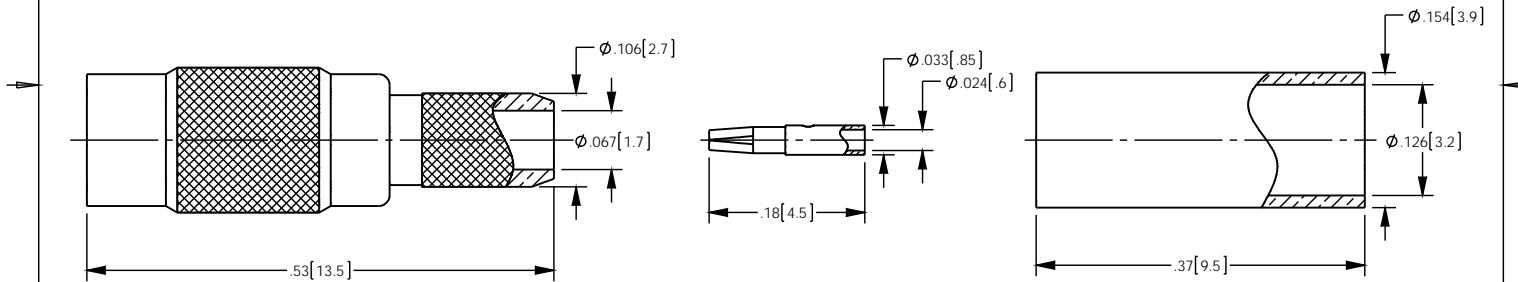

CATALOG P/N: 1320A204M

<small>PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (MM) TOLERANCES: DECIMAL: .XX [XX] ± .01 [0.3] XXX [X.XX] ± .005 [0.13] XXXX [X.XXX] ± .000X ANGLES: ± 2° SCALE: 6:1</small>				 <small>Winchester Electronics Corporation 199 Park Road Ext Suite 104 Middlebury, Connecticut 06762</small>			
CUSTOMER SALES DRAWING				<small>THIRD ANGLE</small> 			
MMCX CRIMP JACK FOR RG-174/U, 188A/U, 316/U							
<small>DRAWN</small>	<small>DATE</small>	<small>APPROVED</small>	<small>DATE</small>	A	SD1320A204M		
JL	12/16/2014	SK	12/19/2014				
<small>APPROVED</small>	<small>DATE</small>	<small>APPROVED</small>	<small>DATE</small>	<small>SHT</small>	<small>OF</small>		
MS	12/16/14	XXX	XX/XX/XX	1	1		
				<small>REV</small>	<small>REV</small>		
					A		