MODEL NO.	PACKAGING
134-1000-008	ONE PCS PER BAG

REV	ECO	DATE
001	ECO-17-0032	11/28/2017

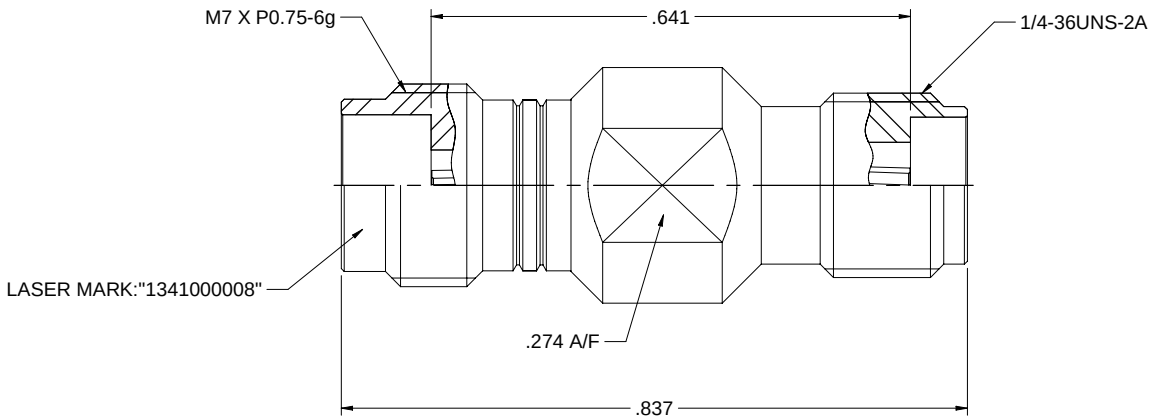

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL & FINISH:
   1.1 BODY: PASSIVATED STAINLESS STEEL
   1.2 CONTACT PIN : GOLD PLATED BERYLLIUM COPPER
   1.3 INSULATOR: ULTEM 1000 AMBER

2. ELECTRICAL:
   2.1 IMPEDANCE: 50 OHMS
   2.2 FREQUENCY RANGE: 0-46 GHz
   2.3 INSERTION LOSS: 0.3DB MAX
   2.4 DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS MIN
   2.5 VOLTAGE STANDING WAVE RATIO: DC- 4 GHZ: 1.05 MAX
   4 -20 GHZ: 1.08 MAX
   20-46 GHZ: 1.15 MAX
   2.6 CONTACT RESISTANCE: CENTER CONTACT: 4 MILLIOHMS MAX
   OUTERR CONTACT: 2.5 MILLIOHMS MAX
   2.7 INSULATION RESISTANCE: 5000 MOHM MIN

3. MECHANICAL:
   3.1 ENGAGEMENT/ DISENGAGEMENT FORCE: 0.23 NM MAX
   3.2 CONTACT RETENTION: 20 N MIN
   3.3 DURABILITY: 500 CYCLES MIN

4. ENVIRONMENT:
   4.1 THERMAL SHOCK: MIL-STD-202, METHOD 107, CONDITION B.
   4.2 OPERATING TEMPERATURE: -55 TO 125°C
   4.3 SALT SPRAY: MIL-STD-202, METHOD 101, CONDITION B
   4.4 SHOCK: MIL-STD-202, METHOD 213, CONDITION I
   4.5 VIBRATION: MIL-STD-202, METHOD 204, CONDITION D
   4.6 MOISTURE RESISTANCE: MIL-STD-202, METHOD 106

cinch connectivity solutions
THIS PROPRIETARY Document and the information contained herein is the property of Johnson, a cinch company, and may not be copied, reproduced or shared with the cinch companies, in whole or in part, without the written permission of cinch connectivity solutions. All rights reserved upon demand.
INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5 (latest)

Model No. 134-1000-008
RoHS2 2011/65/EU
Cage Code
3RD ANGLE PROJECTION
UNLESS OTHERWISE SPECIFIED DATA: BOLT
.XXX ±.02
.XXXX ±.01
ANGLES ±5°
Drawn By: Betty.Yu
Date: 10/27/2017

Johnson
Title: ADAPTER ASSEMBLY, 2.4mm JACK TO SMK(2.92mm) JACK
Drawing No. 134-1000-008
Rev. 001
Size C
DO NOT SCALE DRAWING
Workmanship Std: NONE
Sheet 1 of 1