


## IO-Link (PHY) device evaluation board based on L6362A with Arduino connectors for STM32 Nucleo

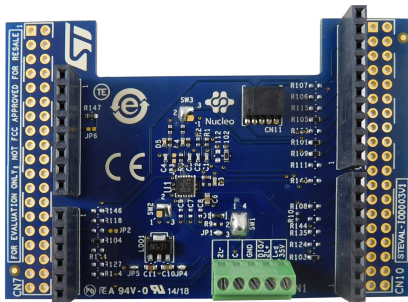

### Features

- **L6362A** IO-Link device transceiver main characteristics:
  - IO-Link PHY layer
  - Dedicated overload diagnostics pin
  - UART interface
  - Selectable 12 mA 3.3 V or 10 mA 5.0 V linear regulator
  - Overload and overheating protections with non-dissipative cut-off function
  - Full reverse polarity on IO-Link interface pins
  - EMC protections (as per IO-Link v1.1)
  - Surge protection (as per IEC 60947-5-2)
  - DFN-12L (3x3x0.9 mm) package
- 6.5 to 35 V operating voltage range
- On-board 100 mA 12 V linear regulator (**L78L**)
- LEDs for status and diagnostics
- Ground and  $V_{CC}$  wire break protections
- Compatible with STM32 Nucleo boards
- Equipped with Arduino UNO R3 connectors
- RoHS and China RoHS compliant

### Description

The **STEVAL-IOD003V1** evaluation board is based on the **L6362A** IO-Link PHY device with full integrated EMC protection (according to IO-Link v1.1 specification) and surge protection (according to IEC 60947-5-2). It provides an affordable and easy-to-use solution for the development of IO-Link and SIO applications, letting you easily evaluate the communication features and robustness of the L6362A.

The on-board linear regulators (12 mA-3.3 V from L6362A and 100 mA-12 V from **L78L12ABUTR**) can be used to supply the microcontroller via the 24 V bus, instead of via USB.

When the L78L12ABUTR is enabled (default configuration), you can also perform evaluation of complete industrial sensor modules by connecting the **STEVAL-IOD003V1** to a **NUCLEO-L073RZ** (or **NUCLEO-L053R8**) board and an **X-NUCLEO-IKS01A2** expansion board.

The **STEVAL-IOD003V1** interfaces with the STM32 controller via UART and GPIO pins and is compatible with the Arduino UNO R3 (default configuration) and ST morpho (optional, not mounted) connectors.

| Product summary   |                        |
|---|------------------------|
| IO-Link device evaluation board based on L6362A with Arduino connectors for STM32 Nucleo  | <b>STEVAL-IOD003V1</b> |
| IO-Link communication transceiver device IC   | <b>L6362A</b>          |
| L6362A IO-Link communication transceiver device IC evaluation software based on STM32Cube | <b>STSW-IOD003</b>     |

# 1 STEVAL-IOD003V1 schematic diagrams

Figure 1. STEVAL-IOD003V1 circuit schematic (1 of 4)


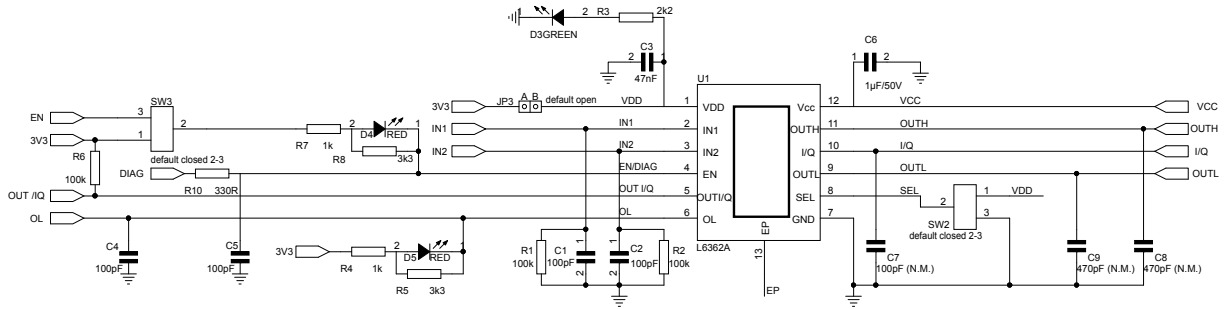


Figure 2. STEVAL-IOD003V1 circuit schematic (2 of 4): Arduino connectors



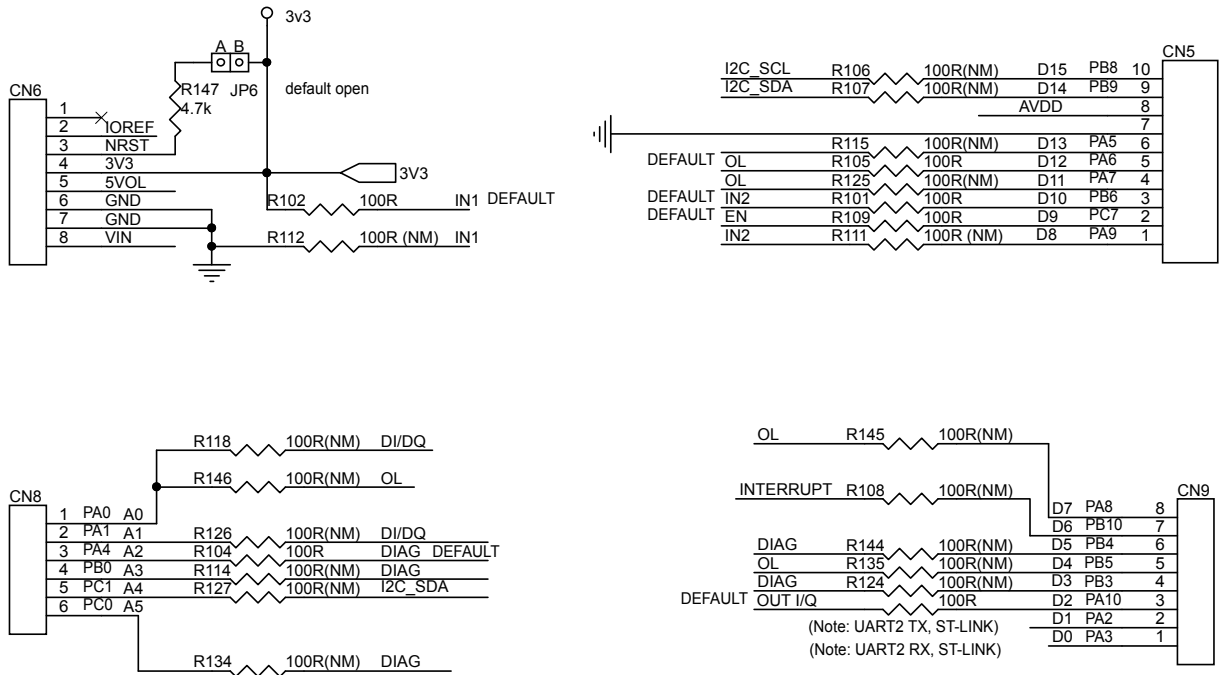

## Revision history

**Table 1. Document revision history**

| Date        | Version | Changes          |
|-------------|---------|------------------|
| 04-Jun-2018 | 1       | Initial release. |