


MODEL NO.	PACKAGING
134-1010-003	ONE PCS PER BAG

REV	ECO	DATE
001	ECO-17-002	11/28/2017
002	ECO-18-000	08/21/2018

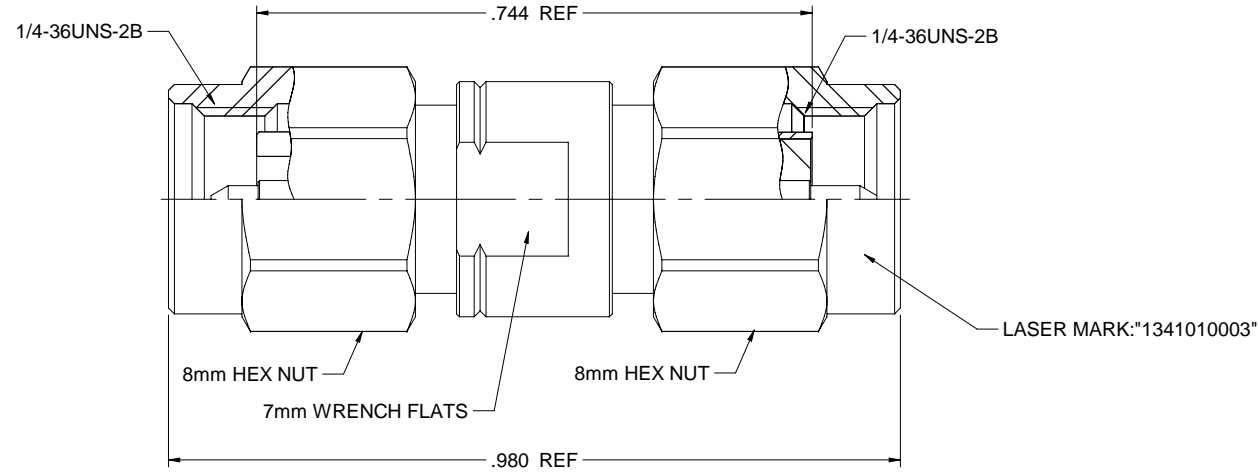

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL & FINISH:
 - 1.1 BODY & SHELL: PASSIVATED STAINLESS STEEL
 - 1.2 CONTACT PIN : GOLD PLATED BERYLLIUM COPPER
 - 1.3 INSULATOR: PTFE WHITE
 - 1.4 C RING: BERYLLIUM COPPER
 - 1.5 GASKET: SILICONE RED
2. ELECTRICAL:
 - 2.1 IMPEDANCE: 50 OHMS
 - 2.2 FREQUENCY RANGE: DC-26.5 GHz
 - 2.3 VOLTAGE STANDING WAVE RATIO: 1.3 MAX
 - 2.4 DIELECTRIC WITHSTANDING VOLTAGE: 750 VRMS MIN
 - 2.5 CONTACT RESISTANCE:
 - 2.5.1 CENTER CONTACT: 3 MILLIOHM MAX
 - 2.5.2 OUTER CONTACT: 2 MILLIOHM MAX
 - 2.6 INSULATOR RESISTANCE: 5000 MEGOHM MIN
3. MECHANICAL:
 - 3.1 ENGAGEMENT / DISENGAGEMENT FORCE: 2 IN-LBS. MAX
 - 3.2 COUPLING NUT RETENTION: 60 LBS. MIN
 - 3.3 COUPLING PROOF TORQUE: 15 IN-LBS. MIN
 - 3.4 CONTACT RETENTION: 6 LBS. MIN
 - 3.5 DURABILITY: 500 CYCLES MIN
4. ENVIRONMENT:
 - 4.1 THERMAL SHOCK: MIL-STD-202, METHOD 107, CONDITION B.
 - 4.2 OPERATING TEMPERATURE: -65 TO 165°C
 - 4.3 SHOCK: MIL-STD-202, METHOD 213, CONDITION I
 - 4.4 VIBRATION: MIL-STD-202, METHOD 204, CONDITION D
 - 4.5 MOISTURE RESISTANCE: MIL-STD-202, METHOD 106

	Model No. 134-1010-003		
<small>THE INFORMATION CONTAINED HEREIN IS UNCLASSIFIED EXCEPT WHERE SHOWN OTHERWISE</small>	<small>DATE: 08/21/2018</small>	<small>DESIGNED BY: Betty.Yu</small>	<small>DATE: 08/21/2018</small>
<small>DO NOT SCALE DRAWING</small>	<small>SIZE: C</small>	<small>DO NOT SCALE DRAWING</small>	<small>NONE</small>
<small>Sheet 1 of 1</small>	<small>002</small>	<small>134-1010-003</small>	<small>ADAPTER ASSEMBLY, 2.92mm(SMK) PLUG TO SMA PLUG</small>