MODEL NO.	PACKAGING
148-0901-721	ONE PCS PER BAG

REV	ECO	DATE
001	ECO-17-0033	12/18/2017

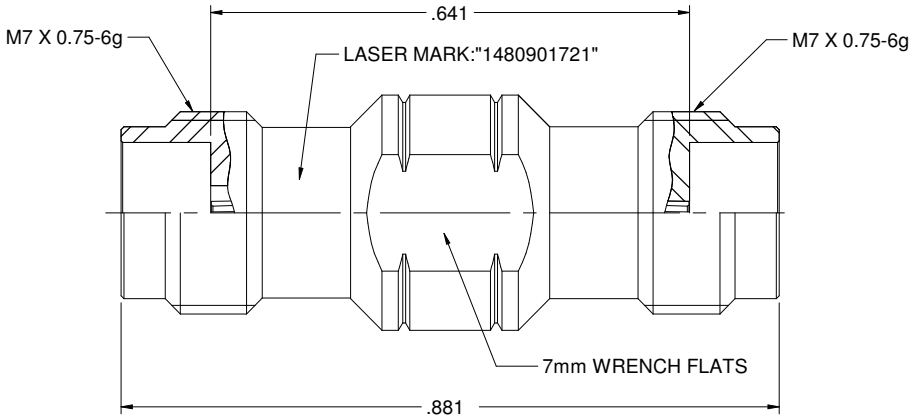

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL & FINISH:
   1.1 BODY: PASSIVATED STAINLESS STEEL
   1.2 CONTACT PIN : GOLD PLATED BERYLLIUM COPPER
   1.3 INSULATOR: ULTEM 1000 AMBER

2. ELECTRICAL:
   2.1 IMPEDANCE: 50 OHMS
   2.2 FREQUENCY RANGE: 0-67 GHZ
   2.3 VOLTAGE STANDING WAVE RATIO: 1.2 MAX
   2.4 INSERTION LOSS: 0.05 X$\sqrt{F\ (GHZ)}$DB MAX
   2.5 DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS MIN
   2.6 CONTACT RESISTANCE: CENTER CONTACT: 4 MILLIOHMS MAX
   OUTER CONTACT: 2.5 MILLIOHMS MAX
   2.7 INSULATION RESISTANCE: 5000 MOHM MIN

3. MECHANICAL:
   3.1 ENGAGEMENT/ DISENGAGEMENT FORCE: 0.23 NM MAX
   3.2 CONTACT RETENTION: 20 N MIN
   3.3 DURABILITY: 500 CYCLES MIN

4. ENVIRONMENT:
   4.1 THERMAL SHOCK: MIL-STD-202, METHOD 107, CONDITION B.
   4.2 OPERATING TEMPERATURE: -55 TO 125℃
   4.3 SALT SPRAY: MIL-STD-202, METHOD 101, CONDITION B
   4.4 SHOCK: MIL-STD-202, METHOD 213, CONDITION I
   4.5 VIBRATION: MIL-STD-202, METHOD 204, CONDITION D
   4.6 MOISTURE RESISTANCE: MIL-STD-202, METHOD 106

cinch
connectivity solutions
cinch.com

This PROPRIETARY Document is property of Cinch Connectivity Solutions and contains confidential, trade secret information. It may not be transferred from the recipient without the express written permission of Cinch Connectivity Solutions, or used for any purpose other than that for which it is furnished.

INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009

Model No. 148-0901-721/730

RoHS2 ☑ 2011/65/EU

UNLESS OTHERWISE SPECIFIED UNITS INCH

.XXX ±.02
.XXXX ±.01
ANGLES ±5°

Cage Code

3RD ANGLE PROJECTION

Drawn by: Betty.Yu

Date: 12/12/2017

Johnson

Title: ADAPTER ASSEMBLY, JACK TO JACK,1.85mm

Drawing No. 148-0901-721/730

Rev. 001

Size C

DO NOT SCALE DRAWING

Workmanship Std NONE

Sheet 1 of 1