
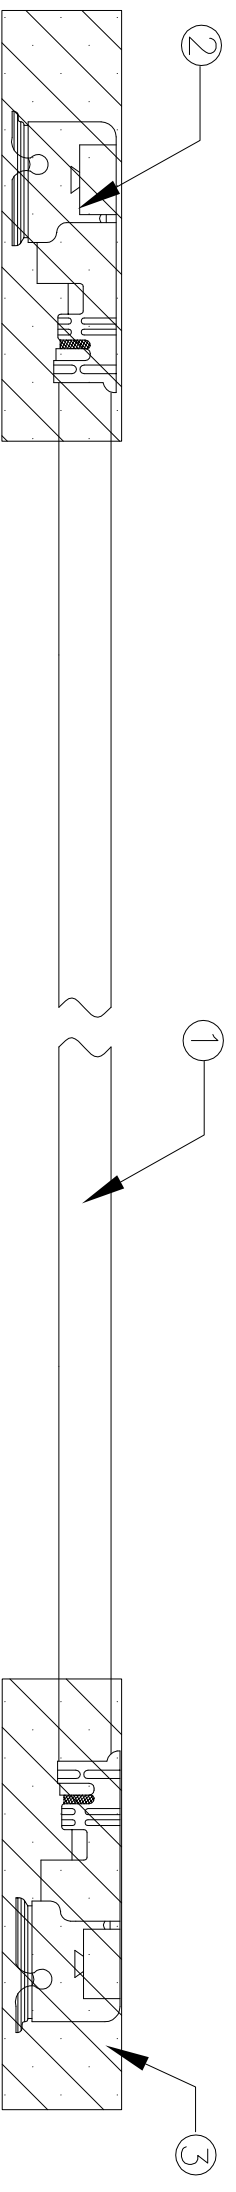


LOC	DIST	REVISONS		DATE	DWN	APVD
GP	00	P	LTR	DESCRIPTION	CP	LZ
		A	NEW RELEASE	12FEB09	CP	LZ

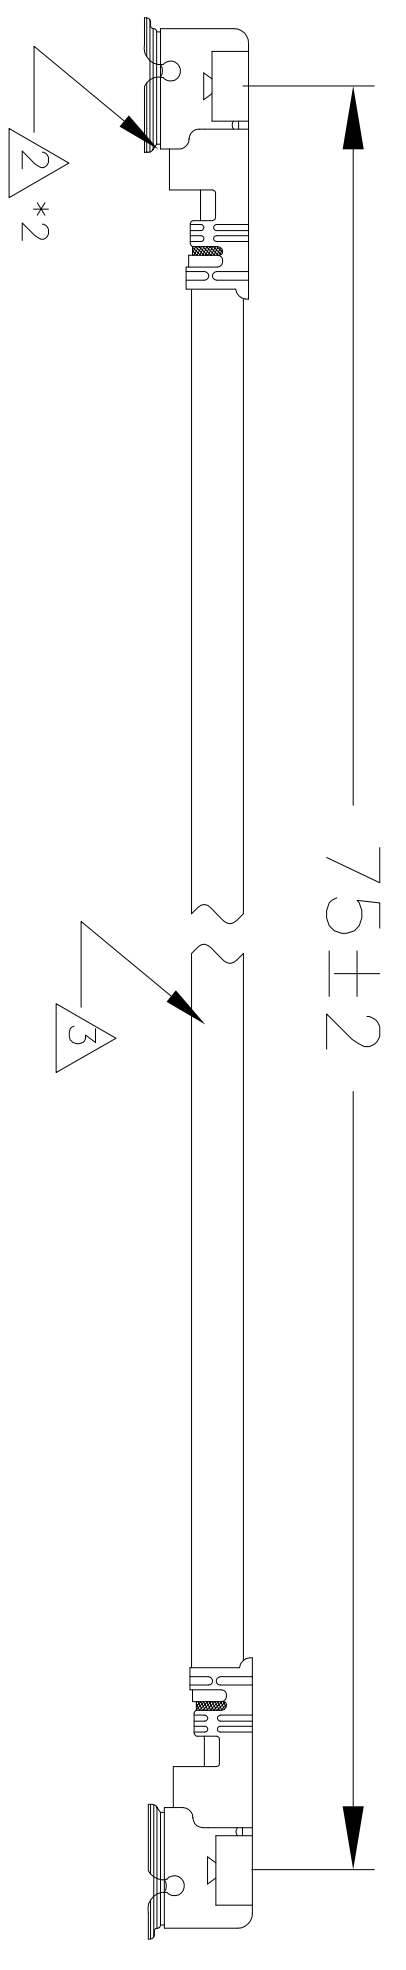

- NOTES:
1. CABLE ASSEMBLY TO BE 100% TESTED FOR OPENS, SHORTS AND CONTINUITY  
 HI-POT: 200 VDC FOR 100MS  
 INSULATION RESISTANCE: 50M OHMS MIN  
 CONTINUITY RESISTANCE: 2 OHMS MAX  
 FREQUENCY RANGE: DC TO 6 GHZ  
 VSWR: 1.5:1 MAX
  2. CONNECTOR: TYPE III U.FL
  3. SUPPLIER: I-PEX 20278-112R-13  
 CABLE: 1.13MM OD, JACKET RED, 50 OHMS FEP INSULATED  
 SUPPLIER: GBE OR TE ENGINEERING APPROVED SUPPLIER
  4. TWO END U.FL CONNECTORS IN THE SAME POSITION
  5. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ELECTRONICS STANDARD 230-702

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN		12FEB09		Tyco Electronics Corporation Harrisburg, PA 17105-3608			
0	PLC	±	-	CHK	Chen Ping	12FEB09		FWT3 Ericsson UMTS/Aux cable assembly red, 75mm, 0degree			
1	PLC	±	-	CHK	Andrew Dong	12FEB09					
2	PLC	±	-	APVD	Lucky Zhang	12FEB09					
3	PLC	±	-	Product spec							
4	PLC	±	-	Application spec				SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
MATERIAL		FINISH		WEIGHT		CUSTOMER DRAWING		A3	00779	1513279	