
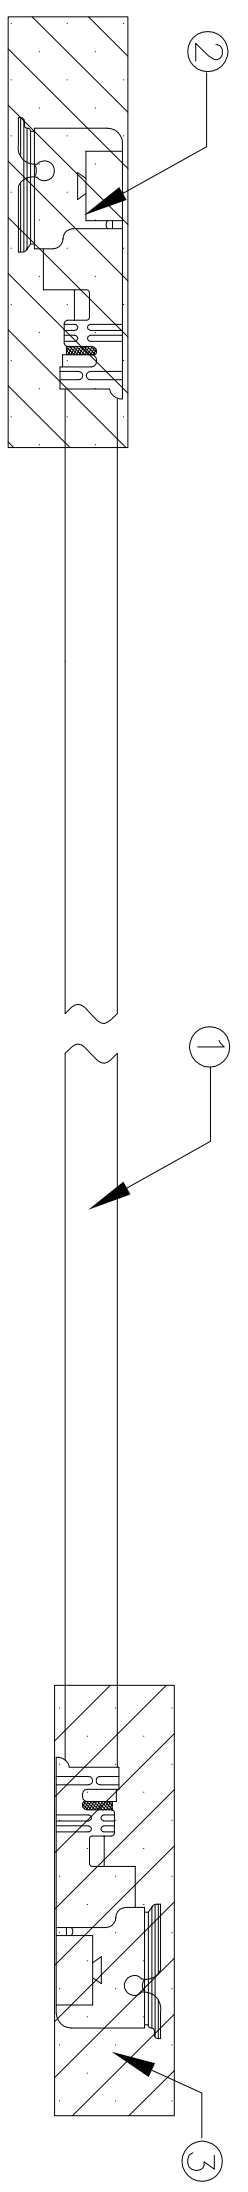


LOC	DIST	REVISONS	
GP	00	P	LTR
		A	NEW RELEASE
		12FEB09	CP LZ

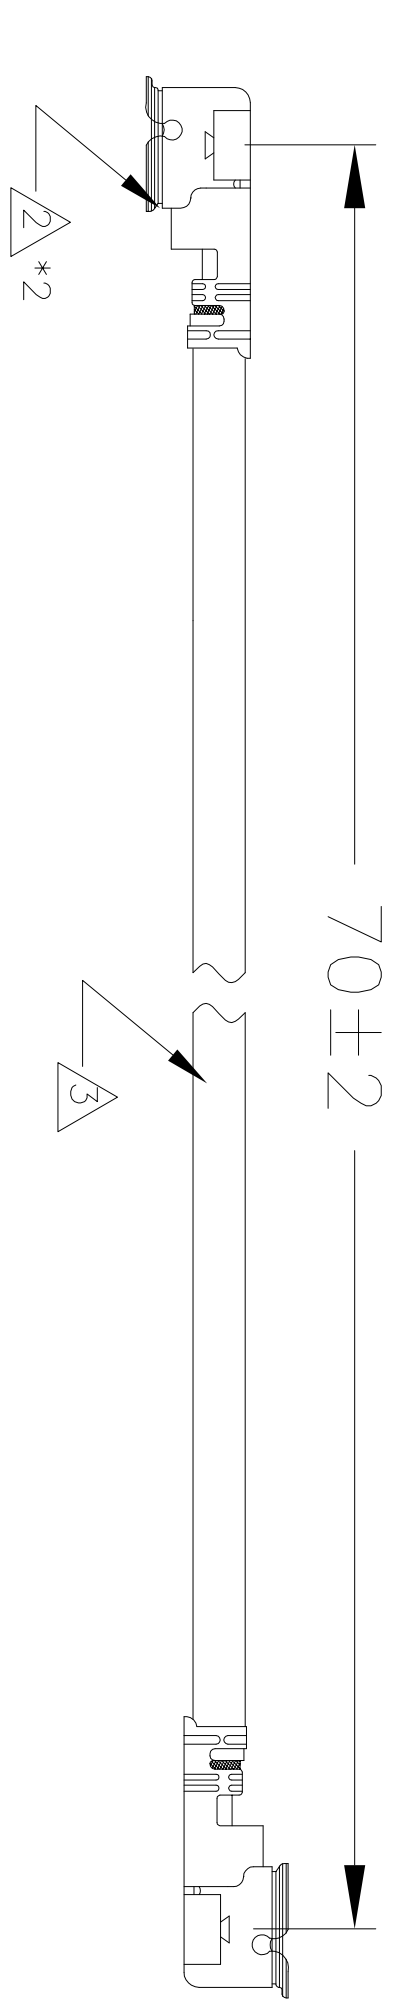

- NOTES:
- CABLE ASSEMBLY TO BE 100% TESTED FOR OPENS, SHORTS AND CONTINUITY
 HI-POT: 200 VDC FOR 100MS
 INSULATION RESISTANCE: 50M OHMS MIN
 CONTINUITY RESISTANCE: 2 OHMS MAX
 FREQUENCY RANGE: DC TO 6 GHZ
 VSWR: 1.5:1 MAX
 - CONNECTOR: TYPE III U.FL
 SUPPLIER: I-PEX 20278-112R-13
 - CABLE: 1.13MM OD, JACKET GRAY, 50 OHMS FEP INSULATED
 SUPPLIER: GBE OR TE ENGINEERING APPROVED SUPPLIER
 - TWO END U.FL CONNECTORS IN 180 DEGREE DIFFERENCE POSITION
 - PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF
 TYCO ELECTRONICS STANDARD 230-702

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC	± -
1 PLC	± -
2 PLC	± -
3 PLC	± -
4 PLC	± -
ANGLES	± -
FINISH	± -

30	MM	PROTECT TUBING FOR I-PEX 20278	3
2	PC	I-PEX 20278-112R-13 CONNECTOR	2
70	MM	COAXIAL CABLE, GRAY COLOR, OD1.13MM	1
-1	U/M	DESCRIPTION	ITEM

DWN	12FEB09	Chen Ping	
CHK	12FEB09	Andrew Dong	
APVD	12FEB09	Lucky Zhang	
PRODUCT SPEC			
APPLICATION SPEC			
WEIGHT			
CUSTOMER DRAWING			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	1513288	
SCALE	SHEET	REV	
N.T.S.	1 OF 1	A	

Tyco Electronics
 Tyco Electronics Corporation
 Harrisburg, PA 17105-3608

FWT3 Ericsson UMTS/Aux cable assembly
 Gray, 70mm, 180degree