


Triple Phone Jacks

156-4319-E, 156-4320-E, 156-4322-E

Date Last Revised:10/12/21

DIMENSIONS: In.

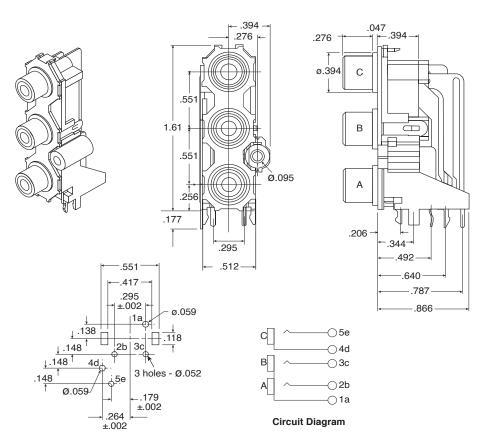

PCB Hole Layout (Bottom View)

SPECIFICATIONS:

Type: Vertical Mount Triple Phono
Rating: 2A/34VDC or 34VAC
Temperature: -25°C ~ +70°C

Contact resistance: ≤30mΩ

withstanding voltage: 500VAC for 1 minute
 Insulation resistance: ≥100MΩ @ 500VDC
 Insertion / Extraction force: .3Kgf ~ 4Kgf

Wave Soldering Temp.: 230±5° for 3 seconds with 2±.5mm Dip

Terminals: Cu/Sn PlatedBrushing: Cu/Sn Plated

Housing: PBTInsulators : PBT

MOUSER	Colors		
STOCK NO.	Α	В	С
156-4319-E	Red	White	Yellow
156-4320-E	Red	Green	Blue
156-4322-E	Red	White	Orange