

High Frequency Ceramic Solutions

1.585GHz Global Navigation (GPS, GLONASS, Beidou, Galileo) SMD Chip Antenna


P/N 1582AT54A0045

Detail Specification: 6/3/2021

Page 1 of 5

General Specifications

Part Number	1582AT54A0045
Frequency (MHz)	1560 - 1605
Peak Gain (YZ-total)	1.5 dBi typ.
Average Gain (YZ-total)	-0.5 dBi typ.
Return Loss	9.5 dB min.
Impedance	50 Ω
Power Capacity	3W max. (CW)
Reel Quantity	500 pcs
Operating Temperature	-40 to +85°C

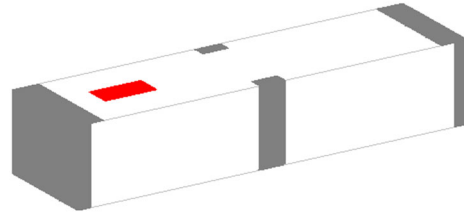


Recommended Storage Conditions of uninstalled product still on T&R	+5 to +35°C Humidity 45~75%RH 18 months max.	Measured Efficiencies					
		MHz	1565	1575	1585	1595	1602
		%	77	80	86	86	82

Part Number Explanation

P/N Suffix	Packaging Style (orderable p/n)	Bulk	Suffix = S	e.g. 1582AT54A0045S
		T & R	Suffix = E	e.g. 1582AT54A0045E
	Termination style	100% Tin	Suffix = E or S	e.g. 1582AT54A0045(E or S)
	Evaluation Board	1582AT54A0045-EB1SMA		


Mechanical Dimensions

	In	mm
L	0.591 ± 0.008	15.00 ± 0.20
W	0.157 ± 0.008	4.00 ± 0.20
T	0.126 ± 0.008	3.20 ± 0.20
a	0.039 ± 0.008	1.00 ± 0.20
a1	0.020 ± 0.008	0.50 ± 0.20
b	0.020 ± 0.008	0.50 ± 0.20
c	0.236 ± 0.008	6.00 ± 0.20

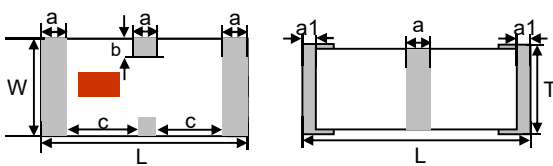

Terminal Configuration

No.	Function
1	Feeding Point
2	GND
3	NC
4	GND

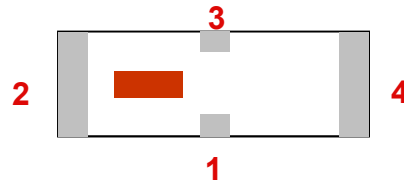

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



<http://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 1.2

2021 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

1.585GHz Global Navigation (GPS, GLONASS, Beidou, Galileo) SMD Chip Antenna

P/N 1582AT54A0045


Detail Specification: 6/3/2021

Page 2 of 5

GPS-only Mounting Considerations

* Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness. Grounded CPWG will provide best results!

Note: It is recommended that the designer leave available slots for a "pi" (or shunt-series-shunt) network. The antenna matching network values above are used when antenna is mounted on Johanson's evaluation board. The matching values on client's PCB will be different. Go to: <https://www.johansontechnology.com/tuning> and see how to obtain the new values.

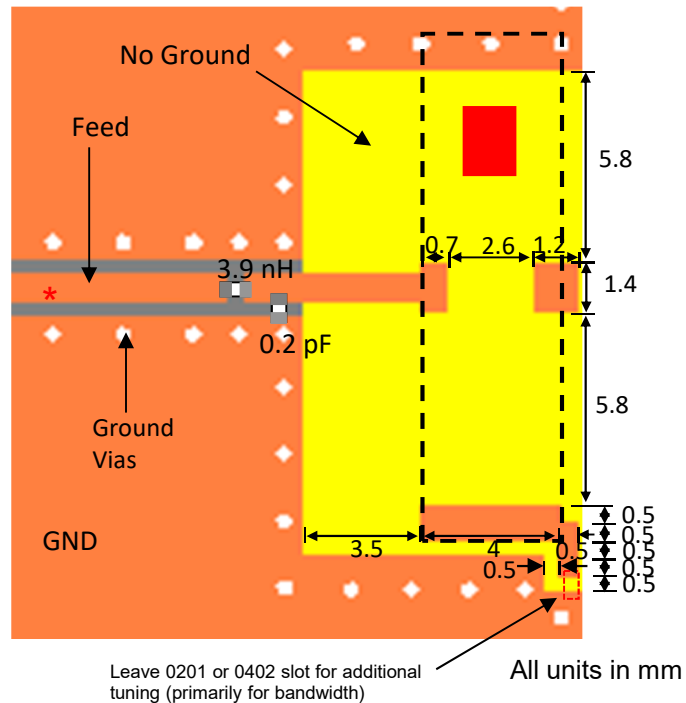

Want the layout file of this? Send us a message at:
<https://www.johansontechnology.com/ask-a-question>

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



<http://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 1.1

2021 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions


1.585GHz Global Navigation (GPS, GLONASS, Beidou, Galileo) SMD Chip Antenna

P/N 1582AT54A0045

Detail Specification: 6/3/2021

Page 3 of 5


Mounting Considerations

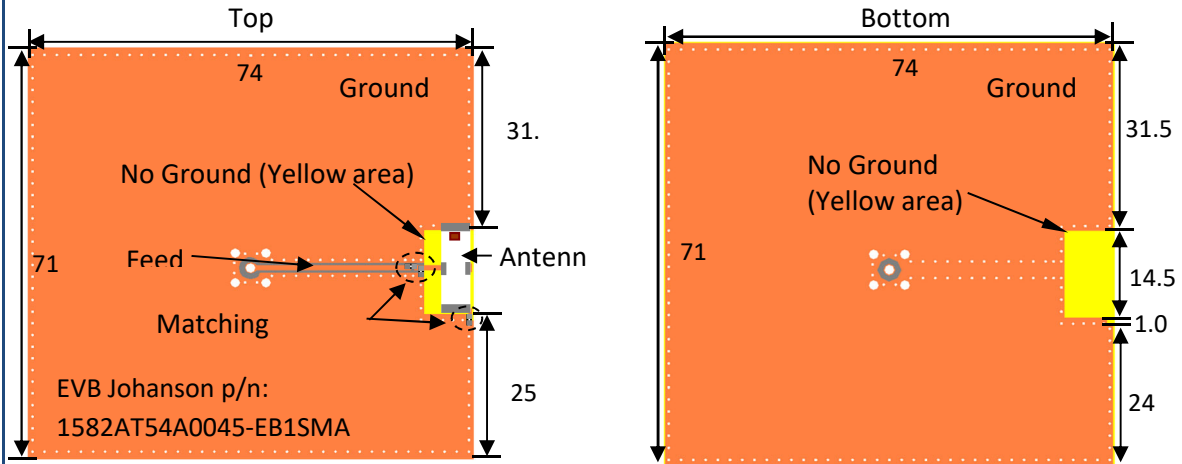

Order this pre-tuned EVB by clicking: <https://www.johansontechnology.com/request-a-sample>

Typical Electrical Characteristics (T=25°C)

Evaluation Board Return Loss

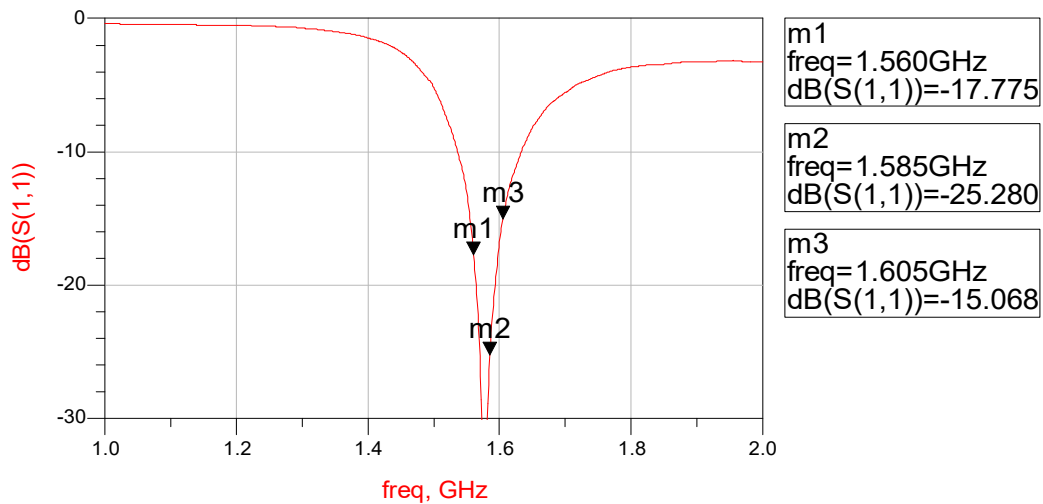

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.

High Frequency Ceramic Solutions


1.585GHz Global Navigation (GPS, GLONASS, Beidou, Galileo) SMD Chip Antenna

P/N 1582AT54A0045

Detail Specification: 6/3/2021

Page 4 of 5

Evaluation Board Typical Electrical Characteristics (T=25°C)

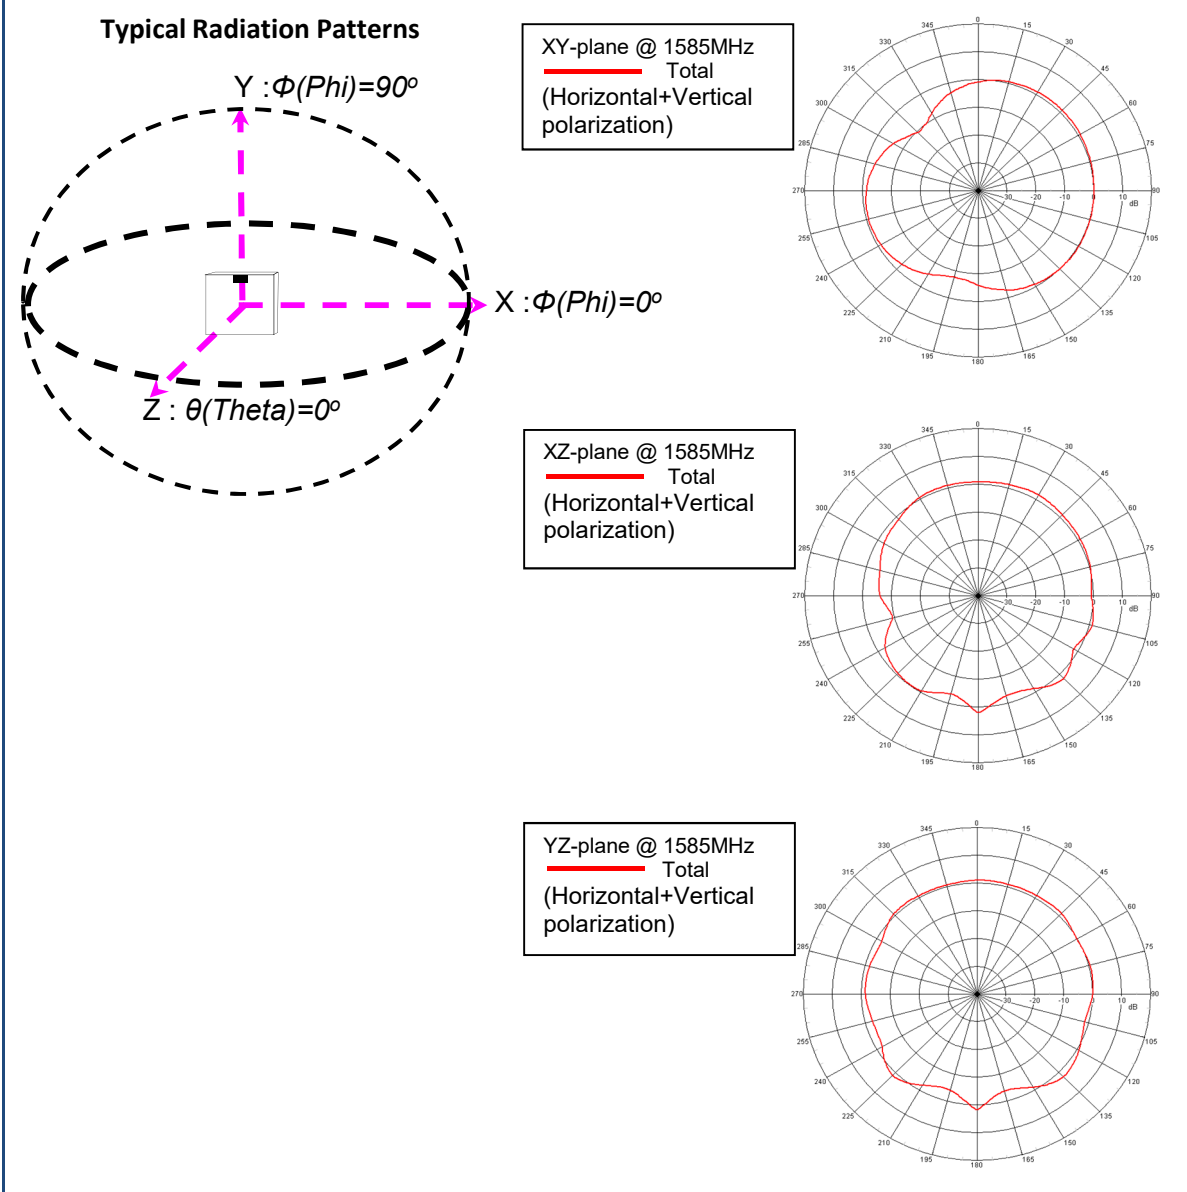

Johanson Technology, Inc. reserves the right to make design changes without notice.
 All sales are subject to Johanson Technology, Inc. terms and conditions.



<http://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 1.2

2021 Johanson Technology, Inc. All Rights Reserved