


# Inlet with Switch

## 161-R301B12-E



Inlet with Switch

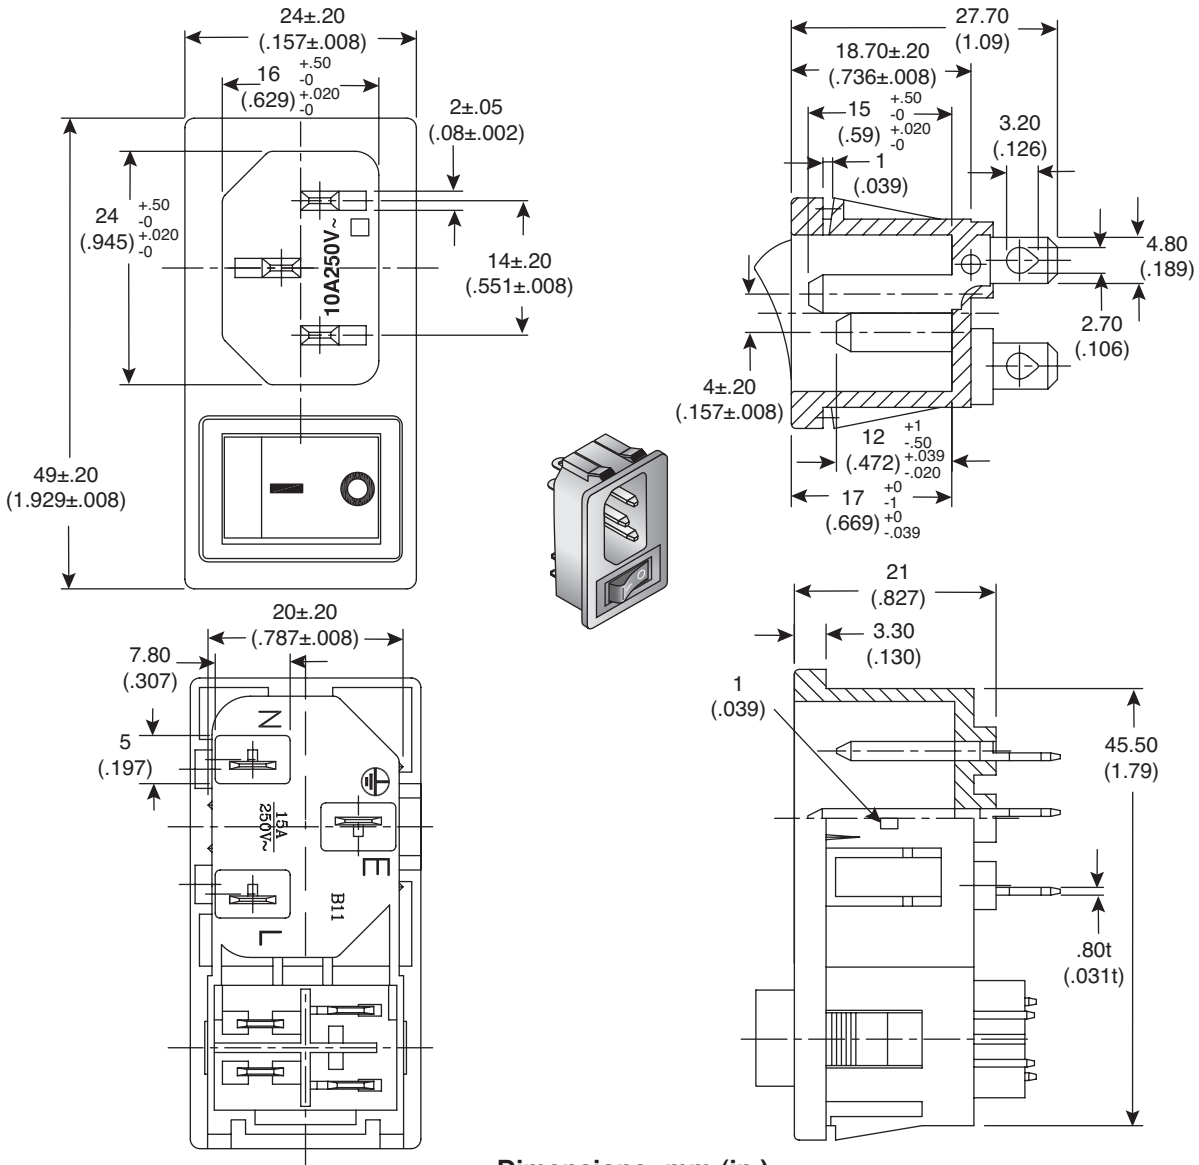

Dimensions: mm (in.)

### SWITCH SPECIFICATIONS

<b>Rating:</b>	12(4)A 250V~ T85 (VDE)
<b>Contact Resistance:</b>	30MΩ Max.
<b>Insulation Resistance:</b>	DC 500V 100MΩ Min.
<b>Withstand Voltage:</b>	AC 1000V 1 Minute, 5mA
<b>Electrical Life:</b>	10000 Cycles at Full Load

### INLET SPECIFICATIONS

<b>Insulation Resistance:</b>	Over 100MΩ at 500V DC
<b>Dielectric Strength:</b>	2000V AC 1 Minute
<b>Body Material:</b>	Black Glass-Fiber, Thermoplastic
<b>RoHS Compliant</b>	

Date Last Revised: 6/26/12

Available from Mouser Electronics  
1-800-346-6873 / www.mouser.com

KC-301215

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.

161-R301B12-E