
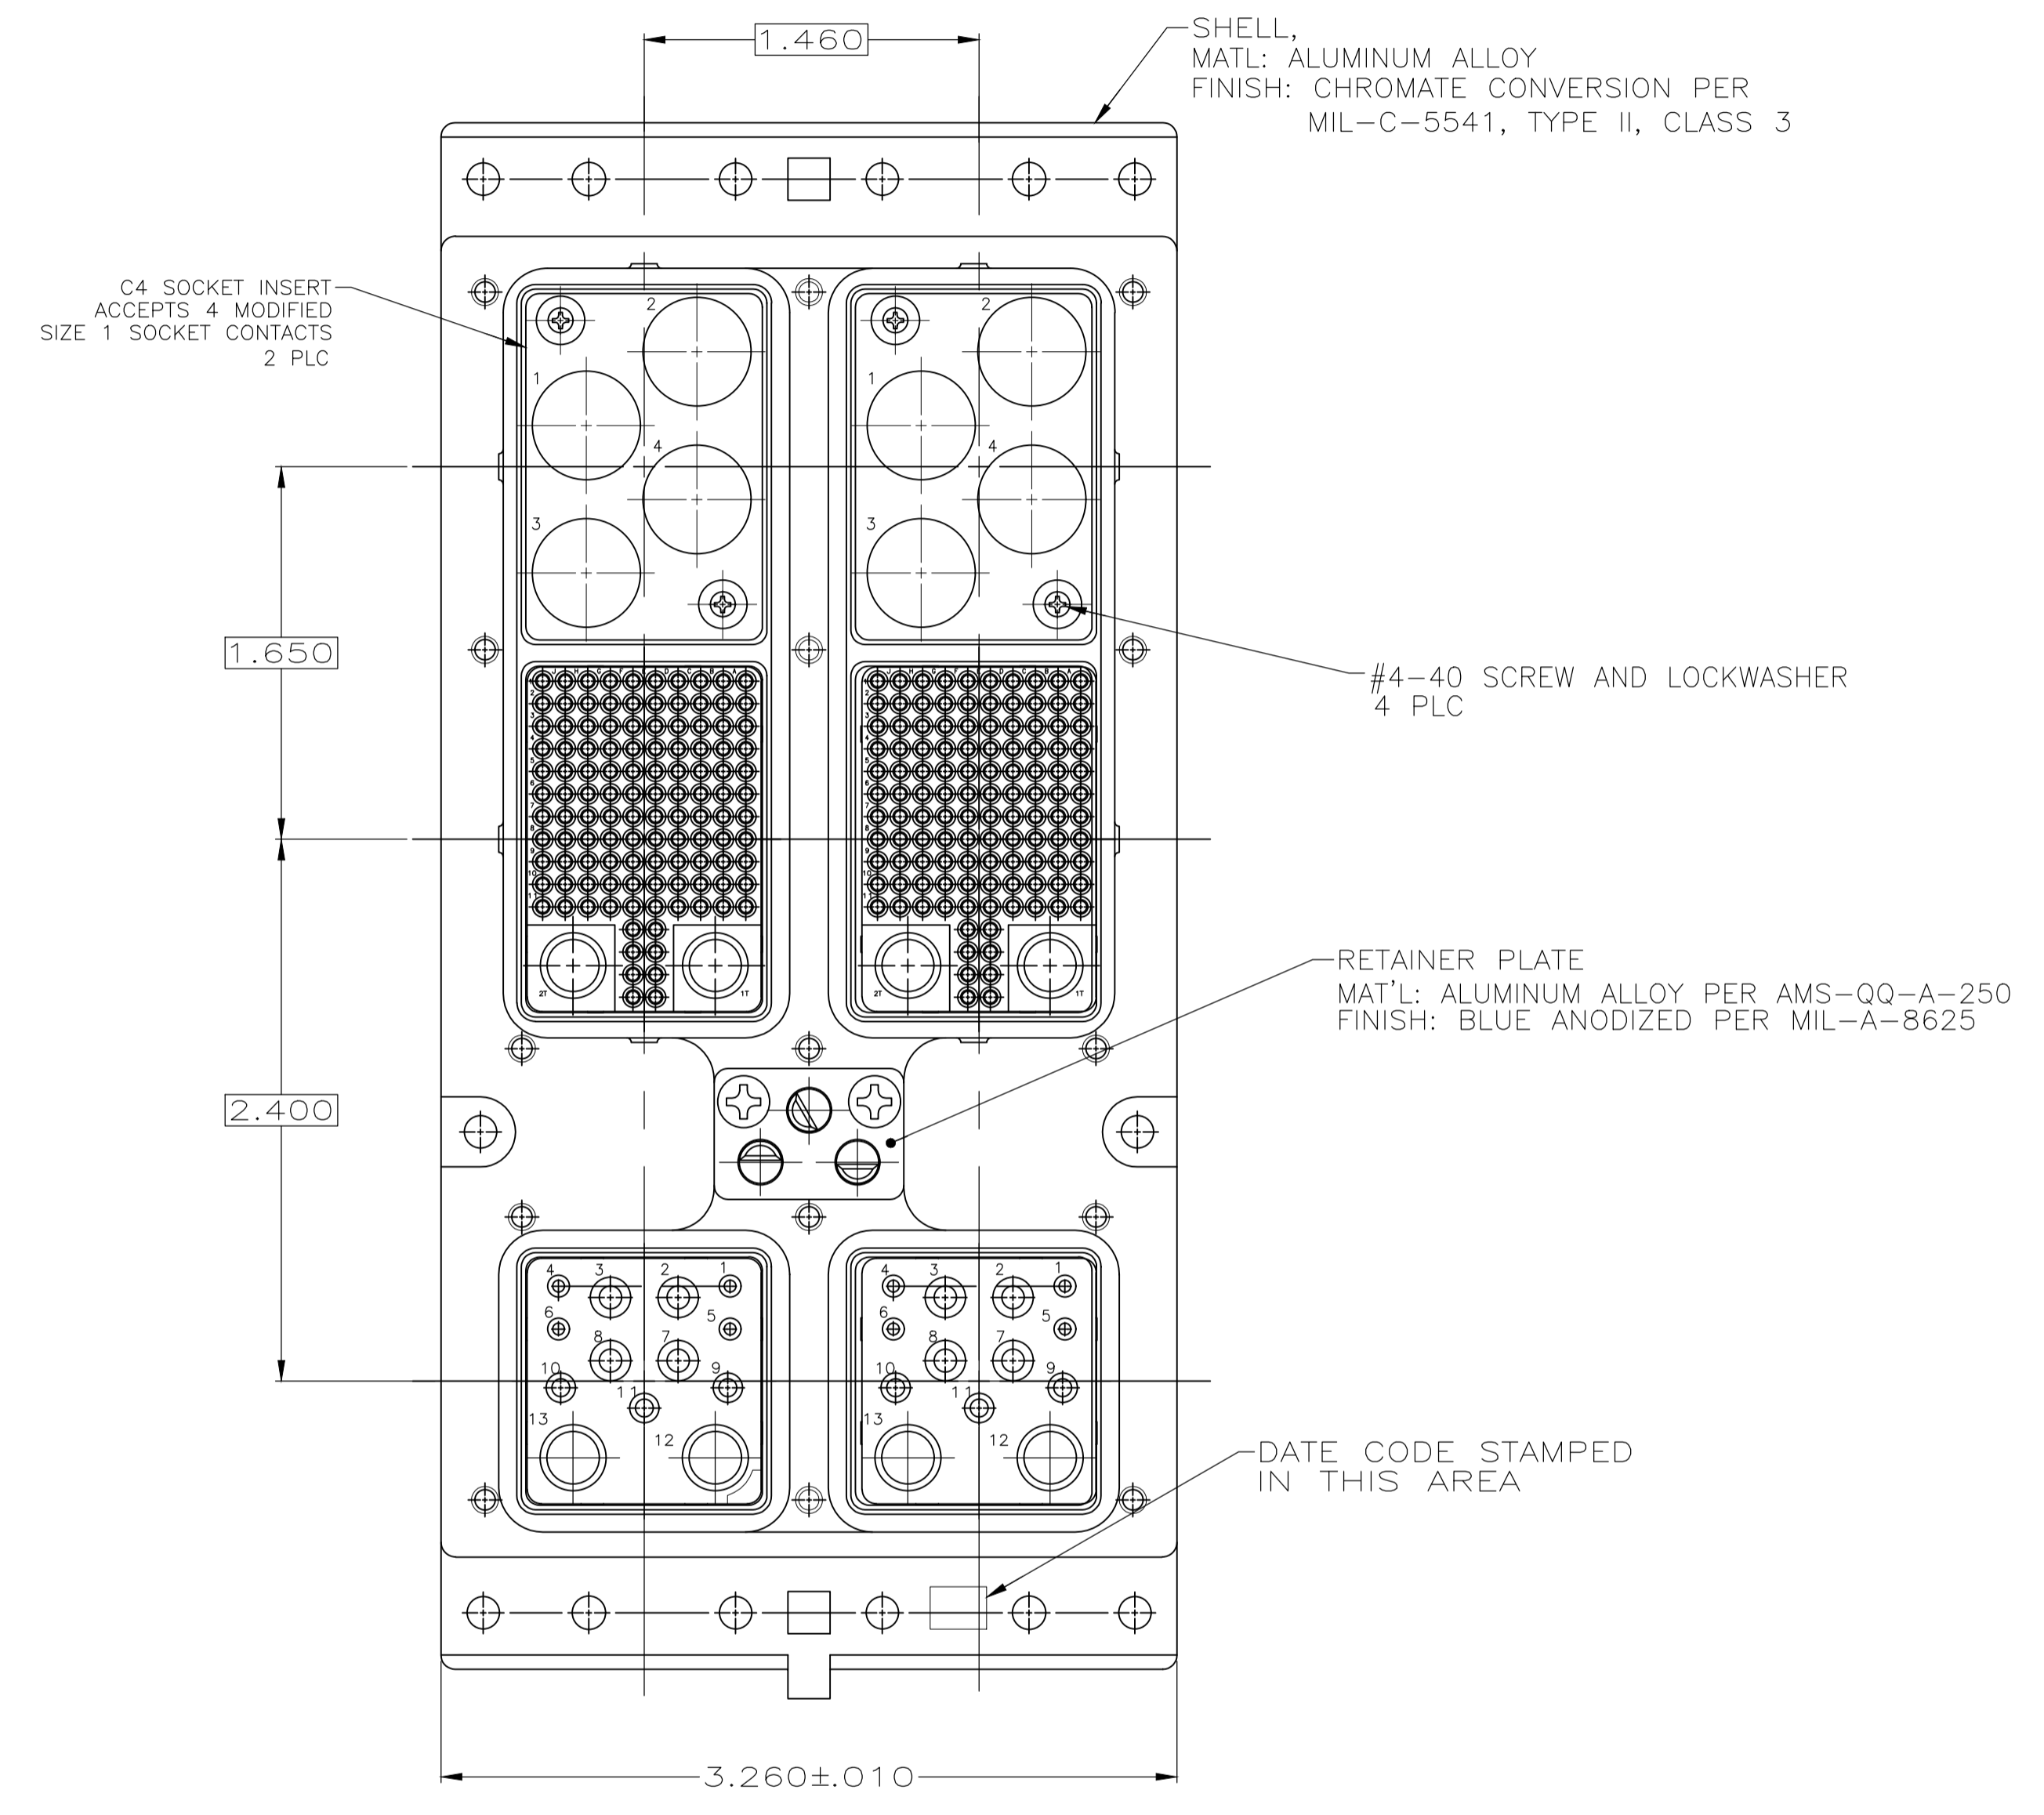


REVISIONS					
P	LTR	DESCRIPTION	DATE	DMN	APVD
E		REVISED PER ECO-17-018523	19JAN2018	PHM	CT

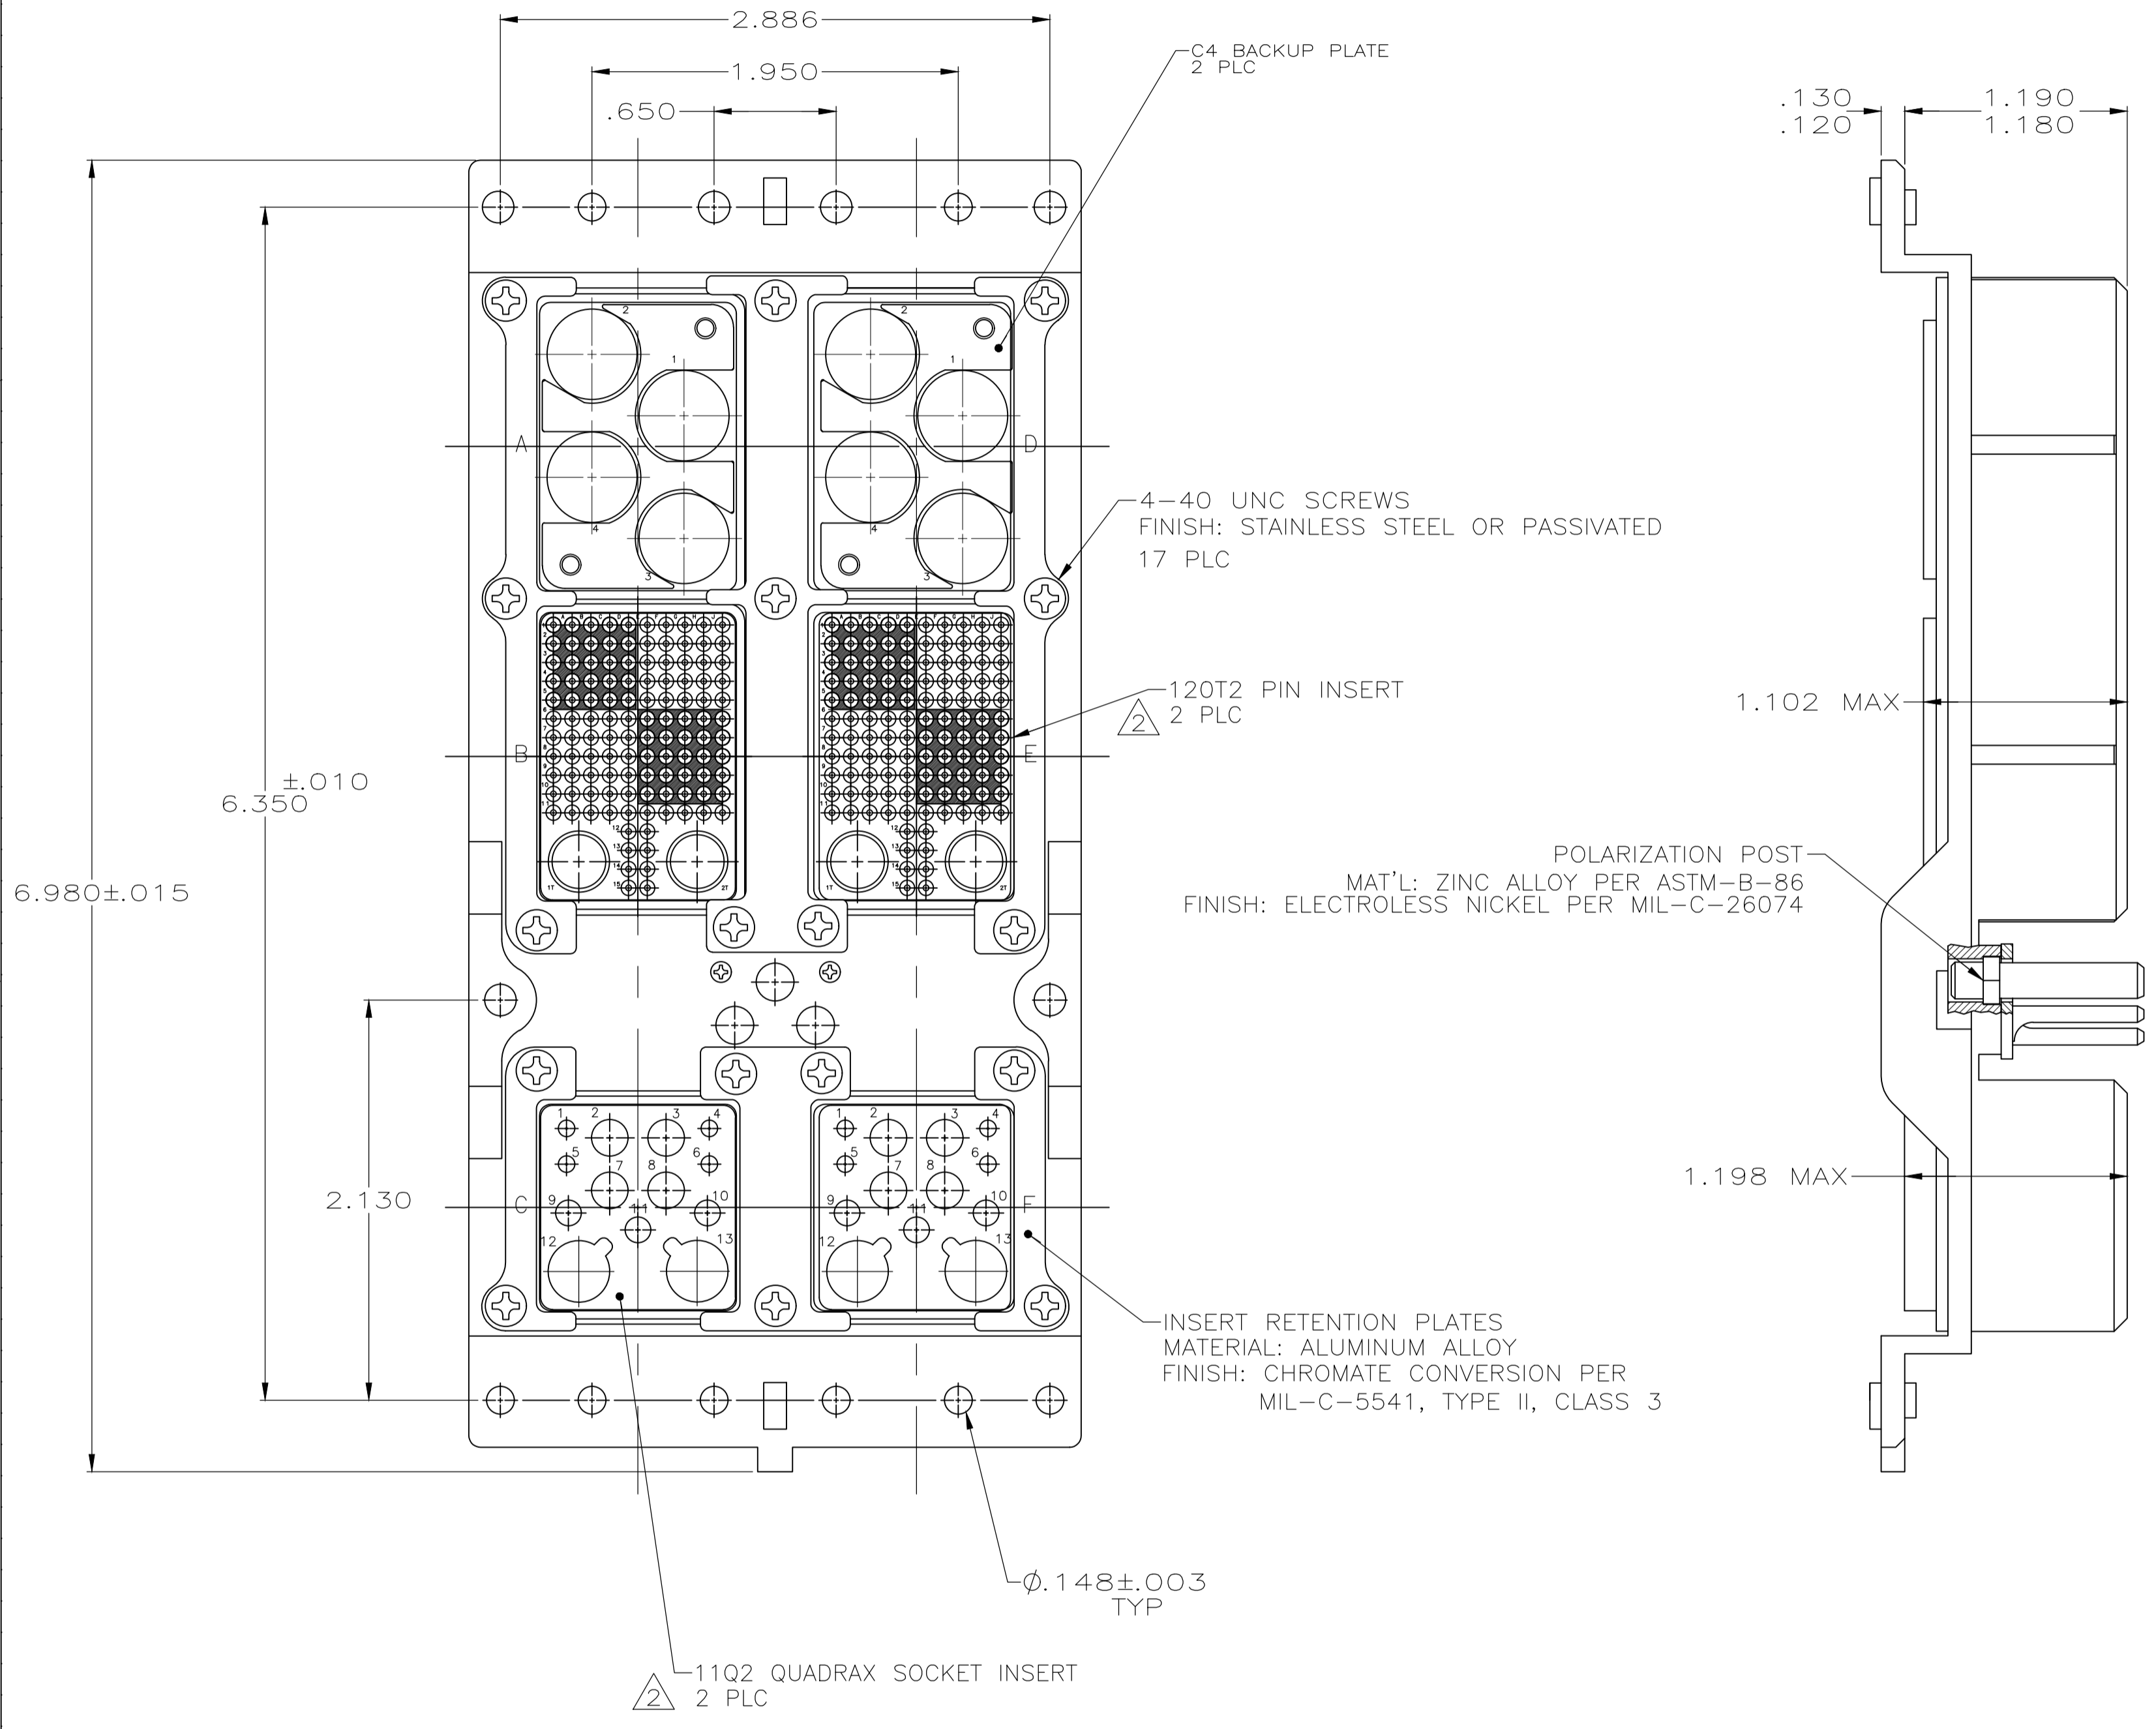

- CONNECTOR DIMENSIONS ARE PER ARINC 600 SPECIFICATION
- INSERT MATERIAL: THERMOSET
- KEYING SHOWN IN POSITION "163", CONNECTOR SUPPLIED WITH KEYING IN POSITION PER TABLE. FOR POSITION "00", KEYING HARDWARE IS SUPPLIED UNASSEMBLED.

163	MODULE A & D 446549-5 (MOD. SIZE 1 COAX SOCKET RG393) MODULE B & E 208262-3 (SZ 22 PIN CONTACT; QTY=236) 1218821-1 (SZ 8 COAX SOCKET; QTY=4) MODULE C & F 208267-2 (SZ 20 SOCKET CONTACT; QTY=8) 208270-2 (SZ 16 SOCKET CONTACT; QTY=6) 208273-2 (SZ 12 SOCKET CONTACT; QTY=8) 1445693-1 (SZ 8 SOCKET CONTACT; QTY=4)	1663467-1
	KEYING POSITION	CONTACTS INCLUDED WITH CONNECTOR NOT INSTALLED

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG C.C.THOMAS 5-1-03	TE Connectivity Ltd.																					
DIMENSIONS: INCHES		CHK S.GLATFELTER 5-1-03	NAME S.GLATFELTER																					
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S.GLATFELTER 5-1-03	PRODUCT SPEC																					
<table border="0"> <tr><td>0 PLC</td><td>±</td><td>-</td></tr> <tr><td>1 PLC</td><td>±</td><td>-</td></tr> <tr><td>2 PLC</td><td>±</td><td>-</td></tr> <tr><td>3 PLC</td><td>±</td><td>.005</td></tr> <tr><td>4 PLC</td><td>±</td><td>-</td></tr> <tr><td>ANGLES</td><td>±</td><td>-</td></tr> <tr><td>FINISH</td><td>±</td><td>-</td></tr> </table>		0 PLC	±	-	1 PLC	±	-	2 PLC	±	-	3 PLC	±	.005	4 PLC	±	-	ANGLES	±	-	FINISH	±	-	APPLICATION SPEC	
0 PLC	±	-																						
1 PLC	±	-																						
2 PLC	±	-																						
3 PLC	±	.005																						
4 PLC	±	-																						
ANGLES	±	-																						
FINISH	±	-																						
MATERIAL SEE CALLOUTS	FINISH SEE CALLOUTS	WEIGHT	SIZE A1	CAGE CODE 00779																				
CUSTOMER DRAWING		DRAWING NO. 1663467	RESTRICTED TO	SCALE 1.5:1																				
		SHEET 1 OF 1	REV E																					