


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
DF	AO	P	LTR	DESCRIPTION	DATE	DWN	APVD
		0		RELEASED	3-24-04	CT	SG

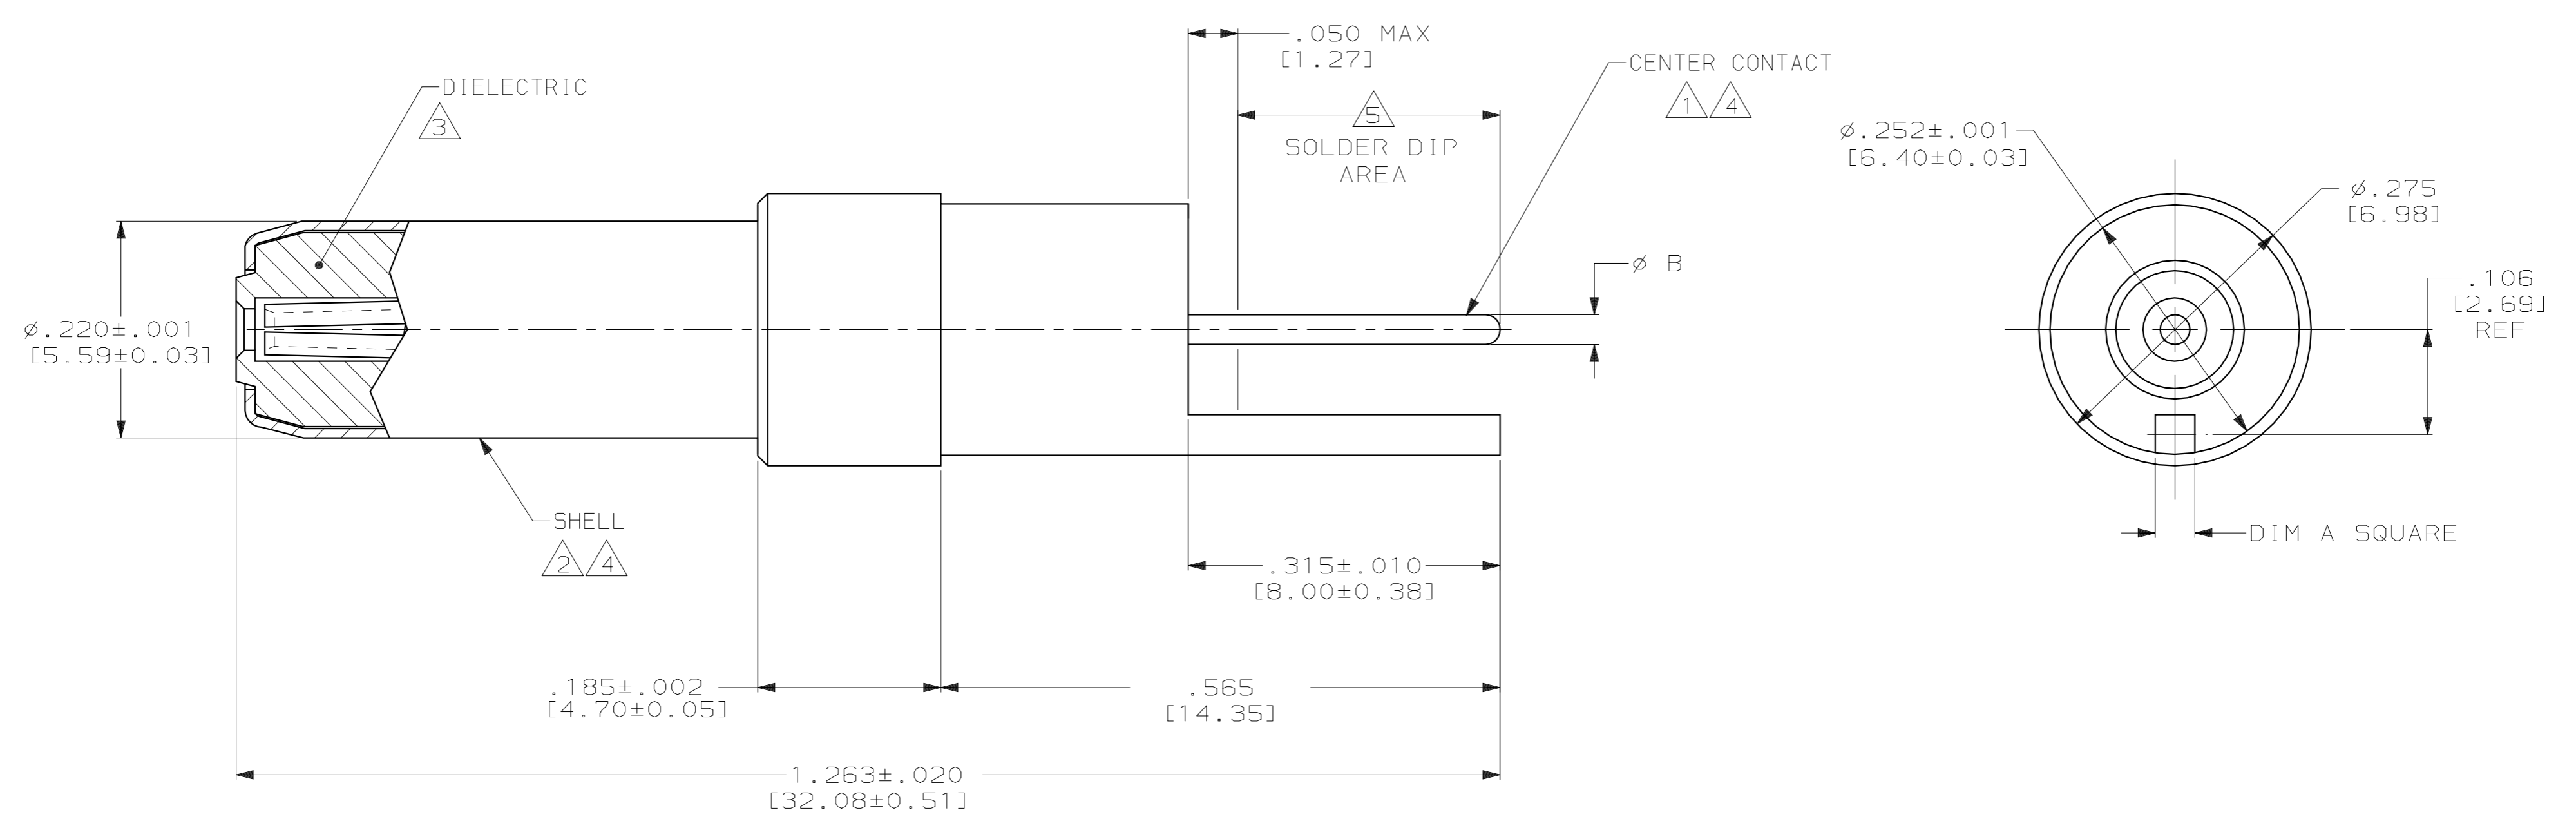

- ① BERYLLIUM COPPER PER ASTM-B-197 OR ASTM-B-643.
- ② BRASS PER ASTM-B-16.
- ③ PTFE PER ASTM-D-1710.
- ④ GOLD PLATE PER ASTM-B-488, TYPE 2, GRADE C, .000050 [0.00127] MIN THK OVER NICKEL PLATE PER QQ-N-290, .000050 [0.00127] MIN THK.
- ⑤ THIS AREA SOLDER COATED WITH SN60 OR SN63 SOLDER. (1663535-2 ONLY)

$.026$ [0.66] MAX	$.047$ [1.19] MAX	⑤	1663535-2
$.020 \pm .002$ [0.51 ± 0.05]	$.040 \pm .002$ [1.02 ± 0.05]	-	1663535-1
DIM B	DIM A	SOLDER DIP	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES [mm]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN C.C. THOMAS 3-24-04	 TYCO Electronics Harrisburg, PA 17105-3608
		CHK S. GLATFELTER 3-24-04	
		APVD S. GLATFELTER 3-24-04	NAME
		PRODUCT SPEC	PIN CONTACT ASSY, COAX, SIZE 5, REAR RELEASE, POSTED, ARINC 600
		APPLICATION SPEC	
MATERIAL	FINISH	WEIGHT	SIZE CAGE CODE DRAWING NO RESTRICTED TO
SEE CALLOUTS	SEE CALLOUTS	-	A2 00779 C- 1663535 -
		CUSTOMER DRAWING	SCALE 8:1 SHEET 1 OF 1 REV 0