


In-Line Phone Jacks

16PJ119N-EX

KOBICONN

In-Line Phone Jacks

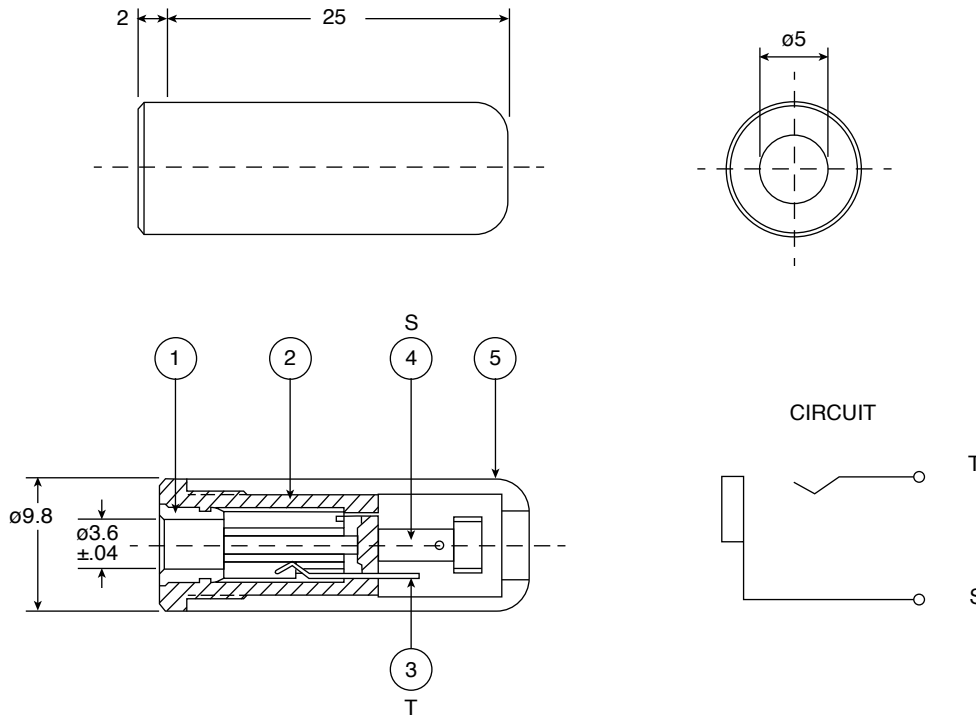

DIMENSIONS: mm

SPECIFICATIONS	
Dielectric Strength:	500V AC for 1 Min.
Contact Resistance:	50mΩ Max.
Insulation Resistance:	100mΩ Min. at 500V DC
Tolerance:	±0.3mm
RoHS Compliant by Exemption	

Pin Configurations	
Sleeve (1):	BSBM, Ni Finish
Housing (2):	PA
Contact A (3):	PSR t = 0.3, Ni Finish
Contact B (4):	PBS t = 0.25, Ni Finish
Cap (5):	ABS

Date Last Revised: 03-15-16

Available from Mouser Electronics
1-800-346-6873 / www.mouser.com

KC-301442

16PJ119N-EX

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.