


| REV. | DATE | DESCRIPTION |
|------|----------|-----------------------|
| A | 04/31/03 | UPDATE DRAWING FORMAT |

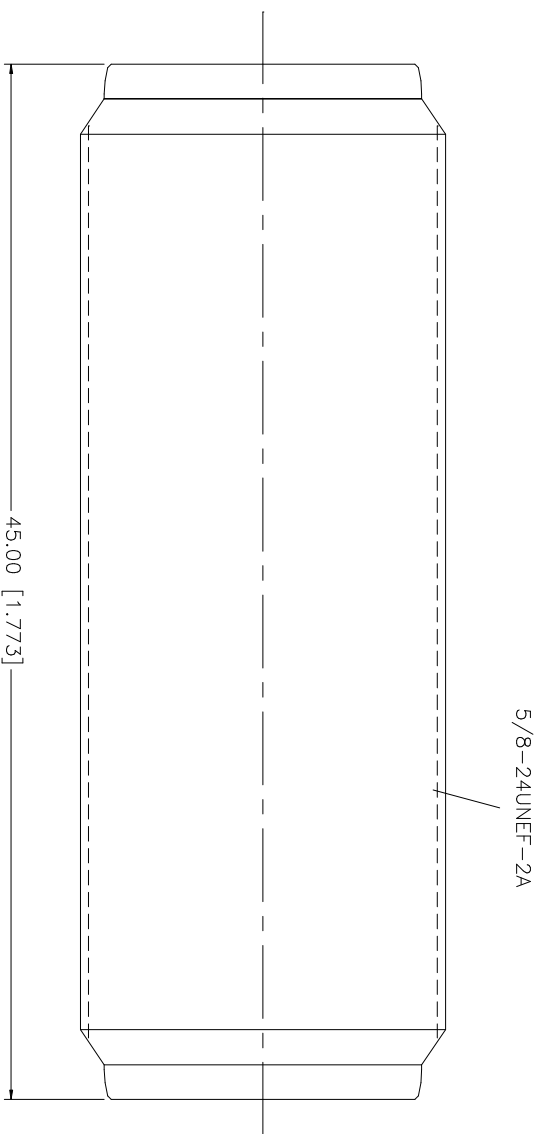

| | | | | | | | |
|---|-------------|--------------|--|-----|--|--|--|
| | | | UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. | | | | |
| 8 | | | TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm | | | | |
| 7 | | | TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" | | | | |
| 6 | | | UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: | | | | |
| 5 | | | UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: | | | | |
| 4 | | | UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: | | | | |
| 3 | CONTACT PIN | PHOS. BRONZE | GOLD | 1 | | | |
| 2 | INSULATOR | TEFLON | NATURAL | 1 | | | |
| 1 | BODY | BRASS | NEXCOTE | 1 | | | |
| | DESCRIPTION | MATERIAL | FINISH | QTY | | | |

Amphenol Connex

N FEMALE TO FEMALE ADAPTER

PART NO. 172123-10

| APPROVALS | DATE |
|-------------------------------|----------|
| DRAWN G.R.S. | 04/31/03 |
| CHECKED | |
| ISSUED | |
| SHEET 1 OF 1 | |
| CAD FILE C:/172/172123-10.DWG | |

| | | | | | | | |
|----------|---------------|------|---|------|---|-------|----|
| DWG. NO. | 172123-10.DWG | REV. | A | SIZE | A | SCALE | NA |
|----------|---------------|------|---|------|---|-------|----|