


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	ECO #7564	04/27/09	M.J.

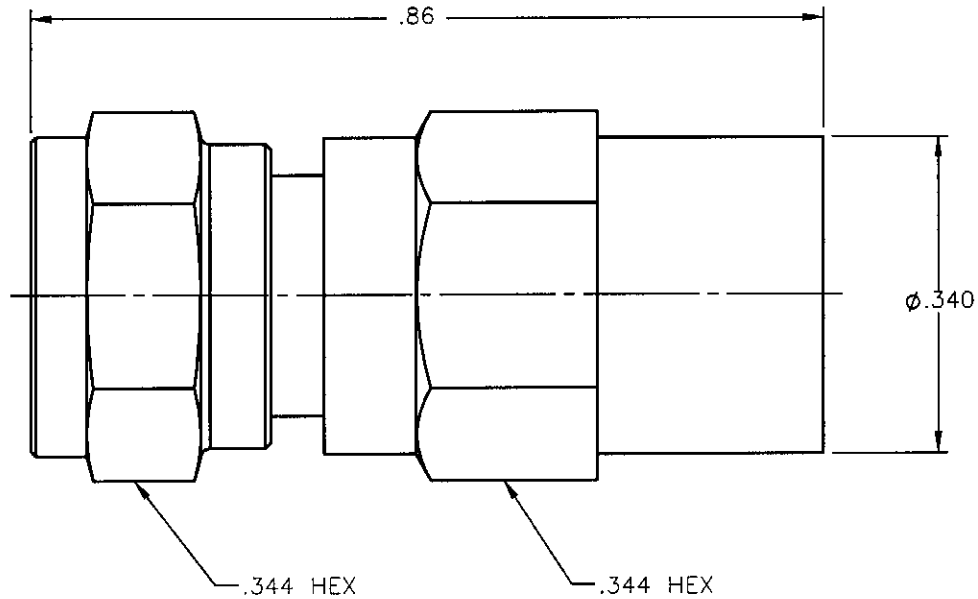

NOTES:

MATERIALS:

1. INSULATORS = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
2. CONTACT = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.
3. ALL OTHER METAL PARTS = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.
4. RESISTOR = METAL FILM PER MIL-R-10509, 75 OHMS $\pm 1\%$.

FINISH:

1. CONTACT = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.
2. ALL OTHER METAL PARTS = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 0, GRADE C, OVER .00010 TO .00020 COPPER STRIKE PER MIL-C-14550.

Property of Radiall Incorporated
 This document cannot be reproduced or
 communicated to a third party without prior
 written permission of RADIALL Incorporated.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON	DWN:	DATE
	M.J.	04/27/09
DECIMAL	CHKD:	DATE
ANGLE	D.N.	04/27/09
	APVD:	DATE
	J.M.	04/27/09



APPLIED ENGINEERING PRODUCTS
 104 John W. Murphy Dr.
 New Haven, CT 06513
 a RADIALL company

75 OHM SMC PLUG
 DUMMY LOAD
 RESISTIVE TERMINATION ADAPTER

REFERENCE:	MATERIALS & FINISHES:
ORIGINATED: D.N. DATE: 10/17/90	SEE NOTES

SIZE	FSCM NO.	DWG NO.	REV
A	19505	1736-1511-075	A
SCALE 5:1		THIRD ANGLE PROJECTION	SHEET 1 OF 1

1736-1511-075