


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
-	-	C	REV PER ECO 16-017138	12-22-16	CT	EO	

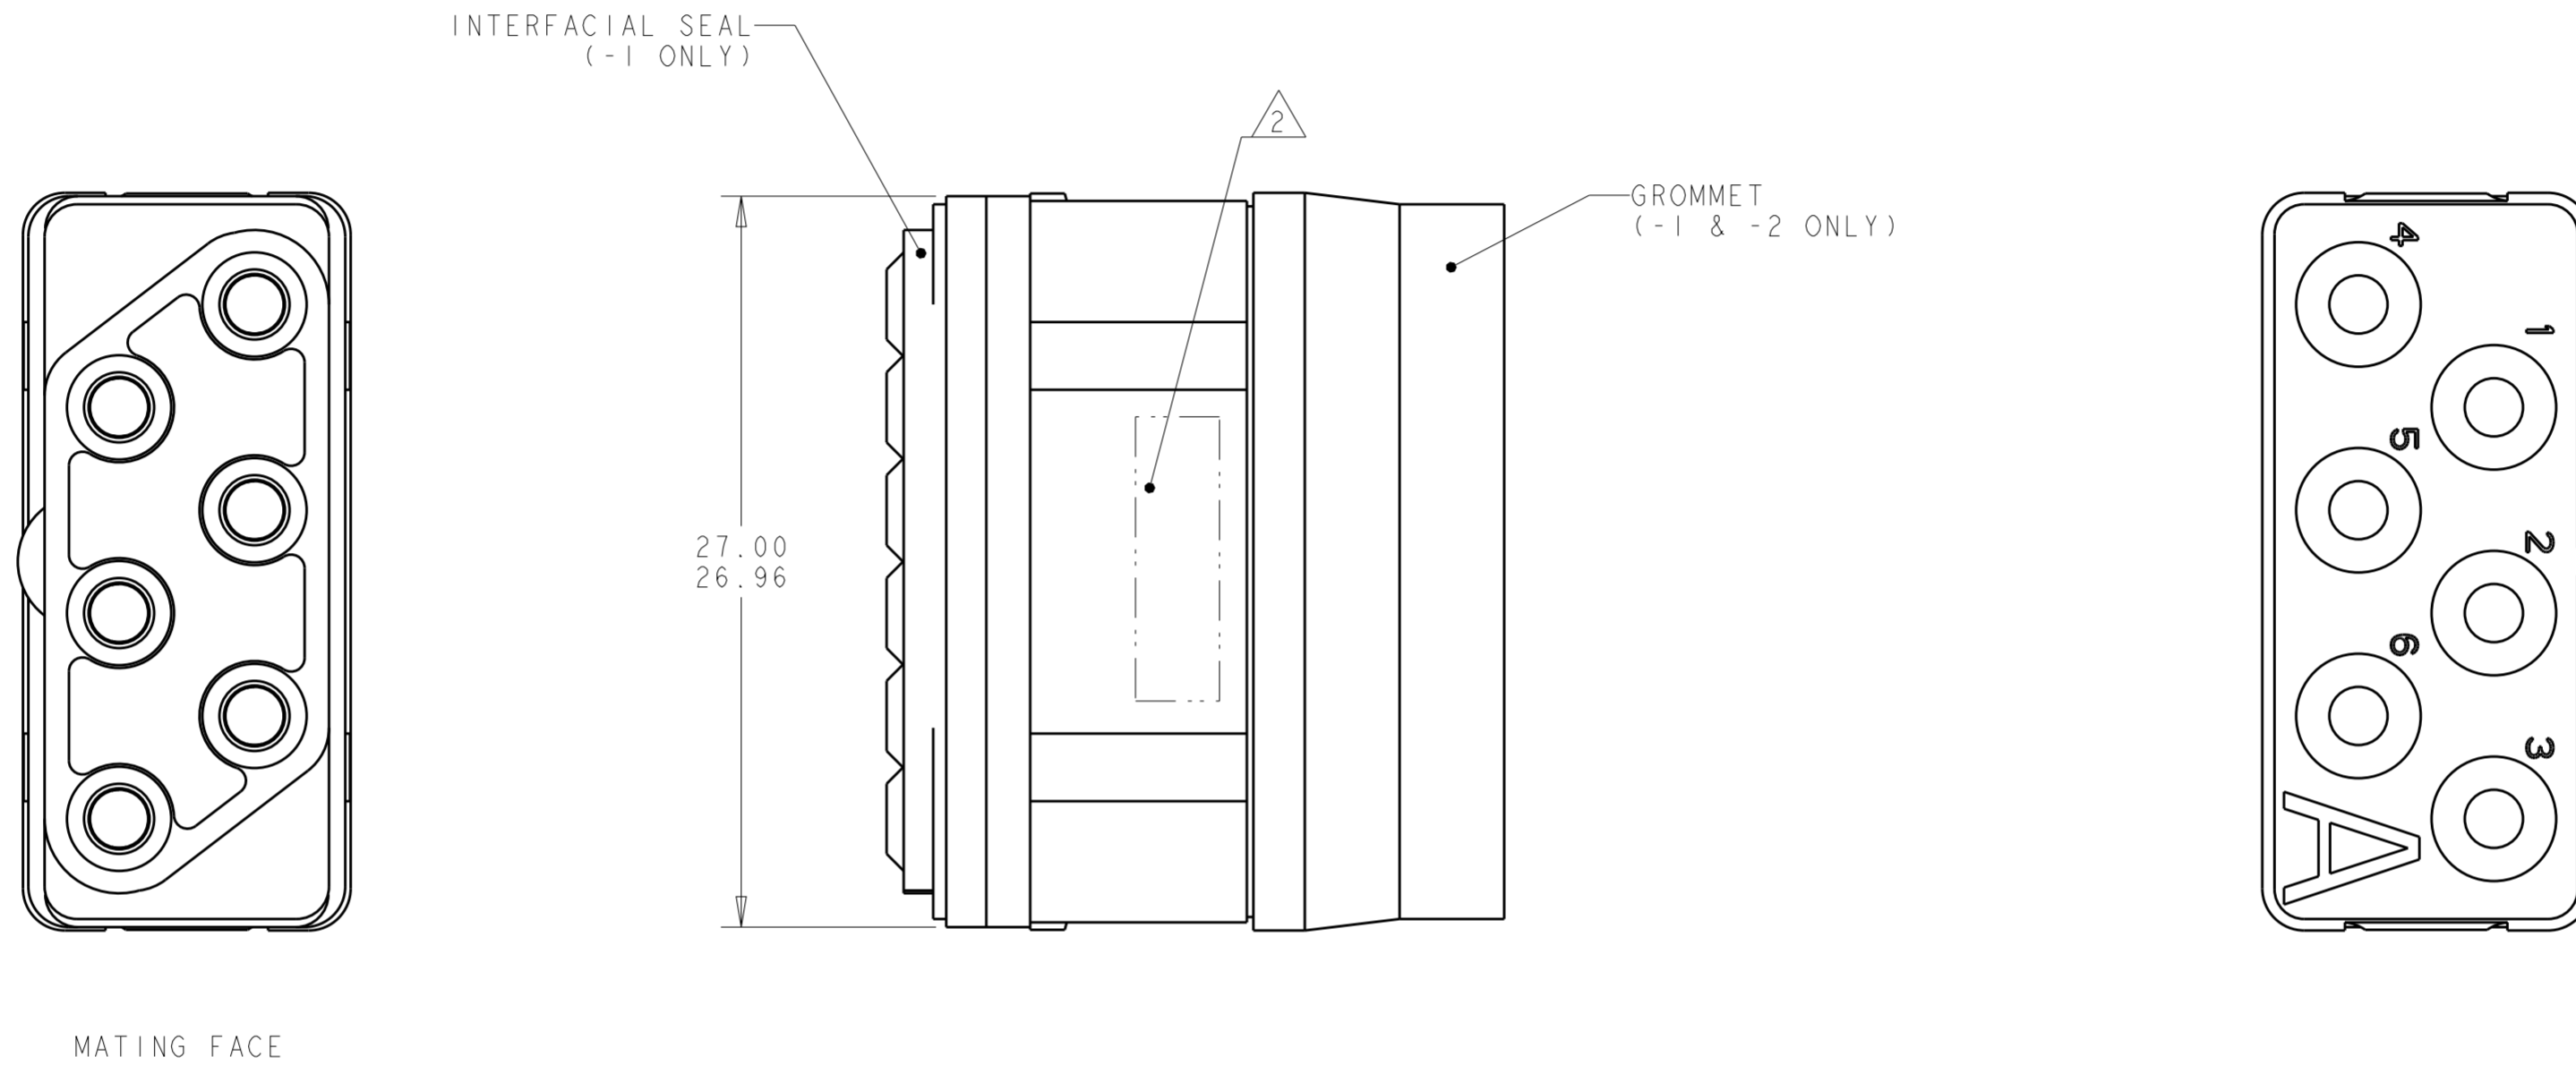

- 1 FRONT & REAR INSULATORS: HIGH-TEMP THERMOPLASTIC OR THERMOSET EPOXY PER ASTM D5948.
CONTACT RETENTION CLIPS: STAINLESS STEEL PER AISI 302 OR COPPER ALLOY PER ASTM B194
REAR GROMMET & INTERFACIAL SEAL: FLUROSILICONE ELASTOMER PER MIL-R-25988 B EXCEPT 4.6.6.1.
- 2 PART TO BE MARKED WITH TE IDENTIFICATION, TE PART NO.
AND DATE CODE: YEAR & WEEK (YY WW) IN APPROXIMATE AREA SHOWN.
- 3. THIS INSERT CONTAINS: 6 CAVITIES FOR SIZE 12 PIN CONTACTS
- 4. THIS PRODUCT IS SOLD BY TYCO ELECTRONICS UNDER A LICENSE FROM RADIAL SA.

NON-ENV	GPRBN06PA	1738096-3
GROMMET ONLY	GPRBH06PA	1738096-2
ENVIRONMENTAL	GPRBE06PA	1738096-1
REMARKS	DESCRIPTIVE PART NO.	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.C. THOMAS 10-30-09	STE TE Connectivity		
		CHK K. HOGAN 10-30-09			
		APVD K. HOGAN 10-30-09	NAME		
DIMENSIONS: mm		PRODUCT SPEC		INSERT ASSEMBLY, PIN, ARRANGEMENT 06, KEY A, GPRB	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC		SIZE CAGE CODE DRAWING NO RESTRICTED TO	
0 PLC ±		WEIGHT		A200779 C-1738096	
1 PLC ±		CUSTOMER DRAWING		SCALE 4:1 SHEET 1 OF 1 REV C	
2 PLC ±0.05					
3 PLC ±					
4 PLC ±					
ANGLES ±					
FINISH					