

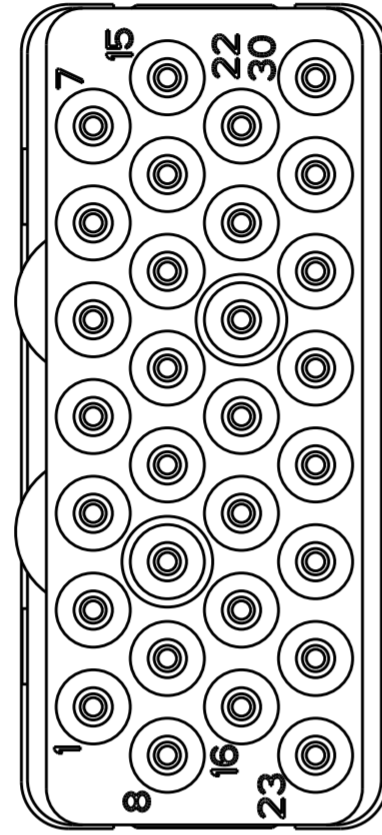
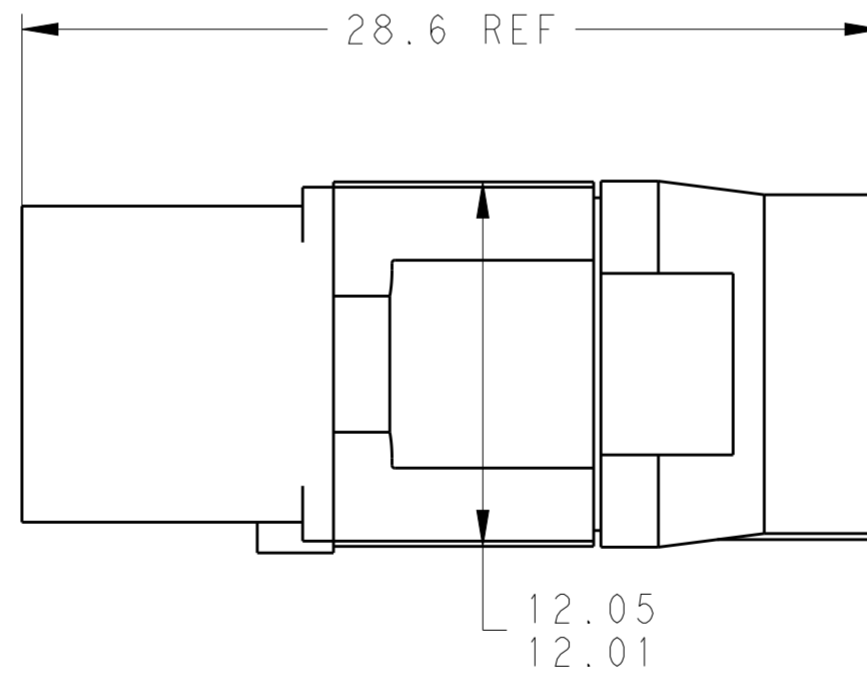


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
-	-	B	REVISED PER ECO-12-018187	2NOV2012	CT	KH	

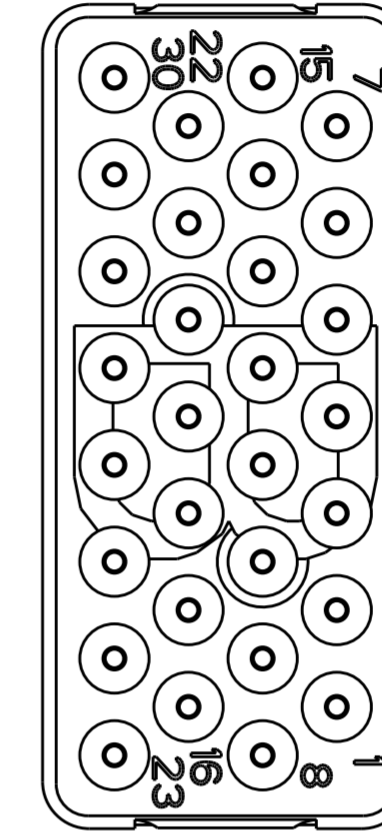

MATING FACE

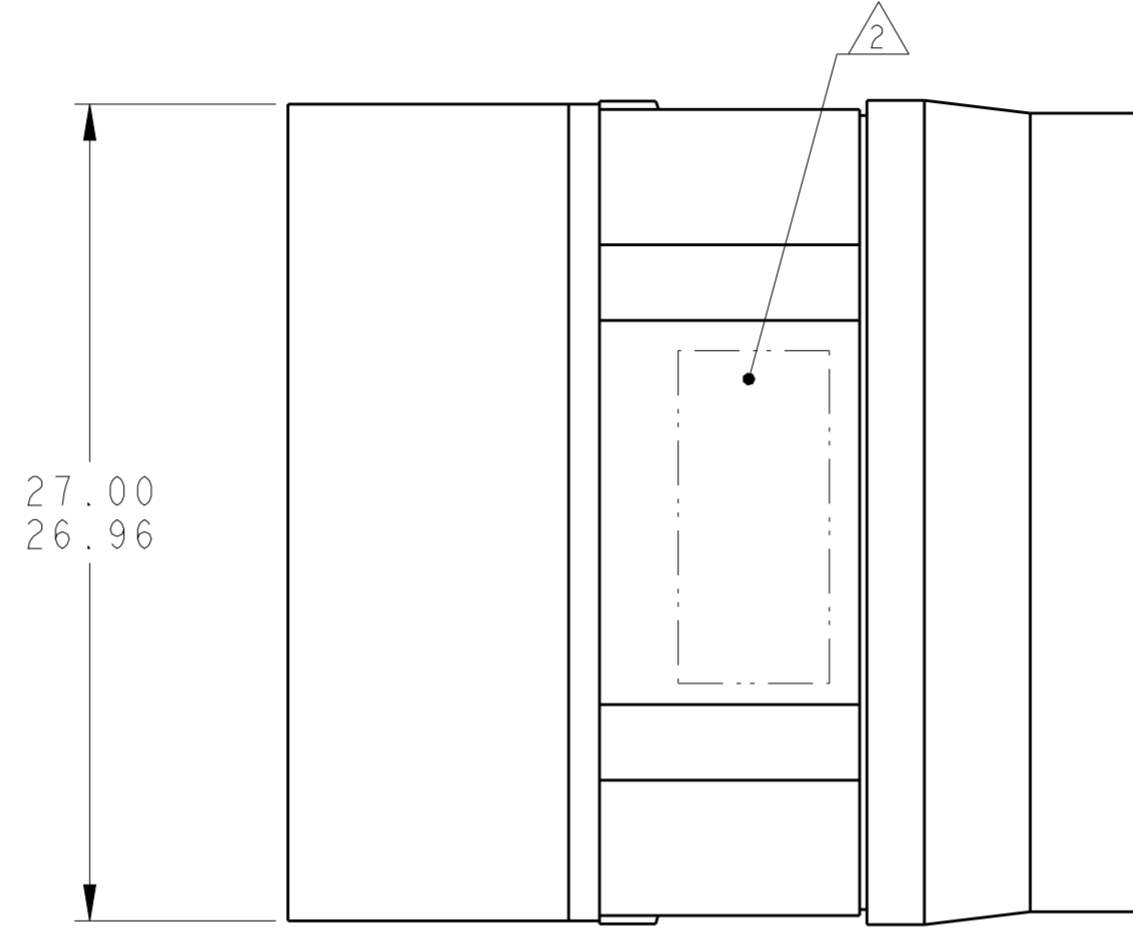

THIS PRODUCT HAS NOT COMPLETED
 VALIDATION TESTING

NON-ENV	GPRBN30SB	1738174-2
ENVIRONMENTAL	GPRBE30SB	1738174-1
REMARKS	DESCRIPTIVE PART NO.	PART NUMBER

1 FRONT & REAR INSULATORS: HIGH-TEMP THERMOPLASTIC OR THERMOSET EPOXY PER ASTM D5948. CONTACT RETENTION CLIPS: STAINLESS STEEL PER AISI 302 OR COPPER ALLOY PER ASTM B194, REAR GROMMET: FLUOROSILICONE ELASTOMER PER MIL-R-25988 B EXCEPT 4.6.6.1.

2 PART TO MARKED WITH TE IDENTIFICATION, TE PART NO. AND DATE CODE: YEAR & WEEK (YY WW) IN APPROXIMATE AREA SHOWN.

3. THIS INSERT CONTAINS: 30 CAVITIES FOR SIZE 20 SOCKET CONTACTS

4. THIS PRODUCT IS SOLD BY TYCO ELECTRONICS UNDER A LICENSE FROM RADIAL SA.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	C. C. THOMAS	8-24-10	 TE Connectivity
DIMENSIONS:		CHK	K. HOGAN	8-24-10	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	K. HOGAN	8-24-10	
mm		PRODUCT SPEC			
		APPLICATION SPEC			
MATERIAL		WEIGHT			
1		CUSTOMER DRAWING		SCALE	4:1
		SIZE		A200779	CAGE CODE
		DRAWING NO		C-1738174	DRAWING NO
		RESTRICTED TO			
		SHEET		1	OF 1
		REV		B	