


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

1965-15-9

REVISIONS	
ISSUE	CHANGES
0	ER 23332 JEP 13 MAY 82
1.	CN 27187 E RJ 14 JUN 85
2	CN 34639 C KH 17 MAY 93

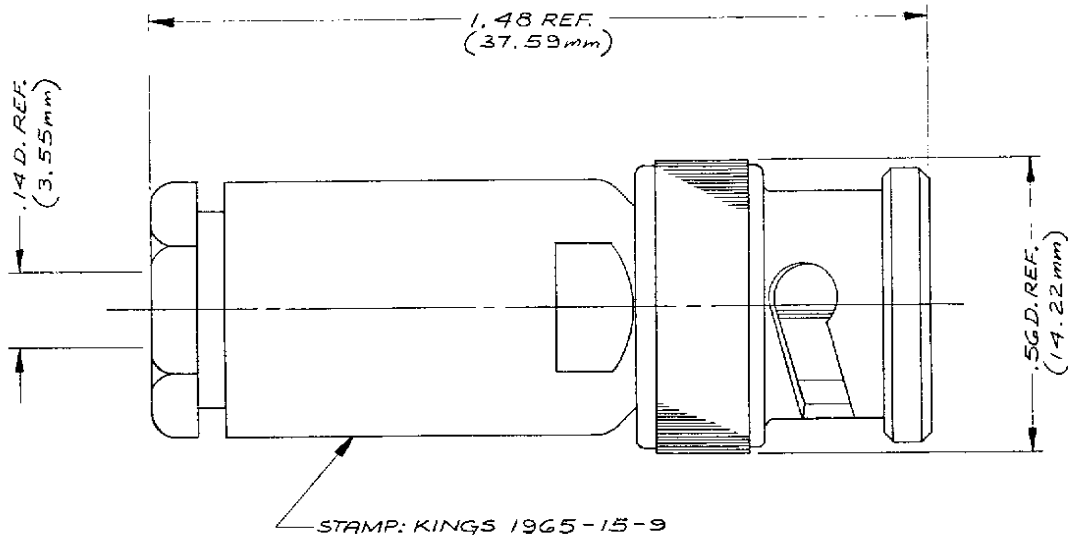

NOTES:

- FOR USE WITH HUGHES HS-4885-1 CABLE.
- FOR CABLING INSTRUCTIONS SEE C-59-316-1.
- MATERIALS:
 - OUTER CONTACT } BERYLLIUM COPPER, QQ-C-530
 - SPRING WASHER } BERYLLIUM COPPER, QQ-C-530
 - HALF WASHER - BRASS, QQ-B-613
 - ALL OTHER METAL PARTS - BRASS, QQ-B-626
 - INSULATORS - TEFLON, L-P-403
 - GASKETS - SILICONE RUBBER, ZZ-R-765
- FINISHES:
 - CENTER CONTACT } HARD GOLD PLATE PER MIL-G-4520
 - OUTER CONTACT } HARD GOLD PLATE PER MIL-G-4520
 - ALL OTHER METAL PARTS - KINGS TARNISH RESISTANT FINISH (TR-5)
- ELECTRICAL CHARACTERISTICS:
 - WORKING VOLTAGE - 400 VOLTS RMS.

GSD

SCALE: 4:1	
APPROX. SURFACE AREA:	
WAS E-11187	
USED ON:	
REF. HUGHES HELICOPTER HS 4895-105 REV D.	
BNC TRIAX PLUG	
DRAWN SD	DATE A MAR 85
APPR. MJB	DATE B MAR 85
APPR. —	DATE —

UNLESS OTHERWISE SPECIFIED:	2. REMOVE ALL BURRS, BREAK SHARP EDGES .005 MAX.
1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS ± .010	3. NO FILLETS PERMITTED.
3 PLACE DECIMALS ± .004	4. SURFACE ROUGHNESS 83 MICROINCHES RMS MAX.
T. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED HALF THE SUM OF THEIR TOLERANCES.	5. ALL DIMENSIONS PRIOR TO PLATING.
	6. ALL PLATING IN ACCORDANCE WITH KER 10004.

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10787

GSD

1965-15-9