
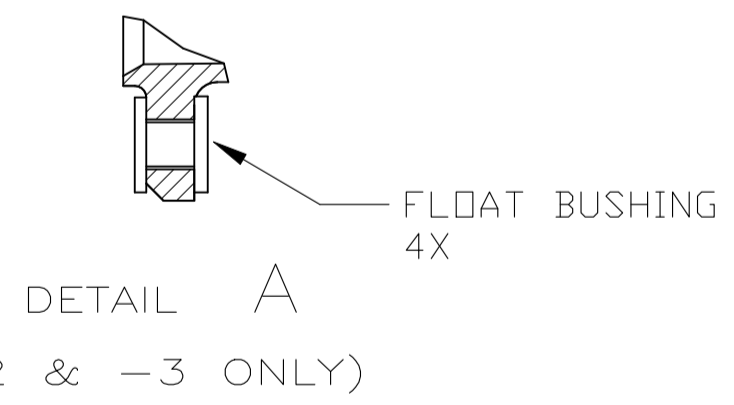
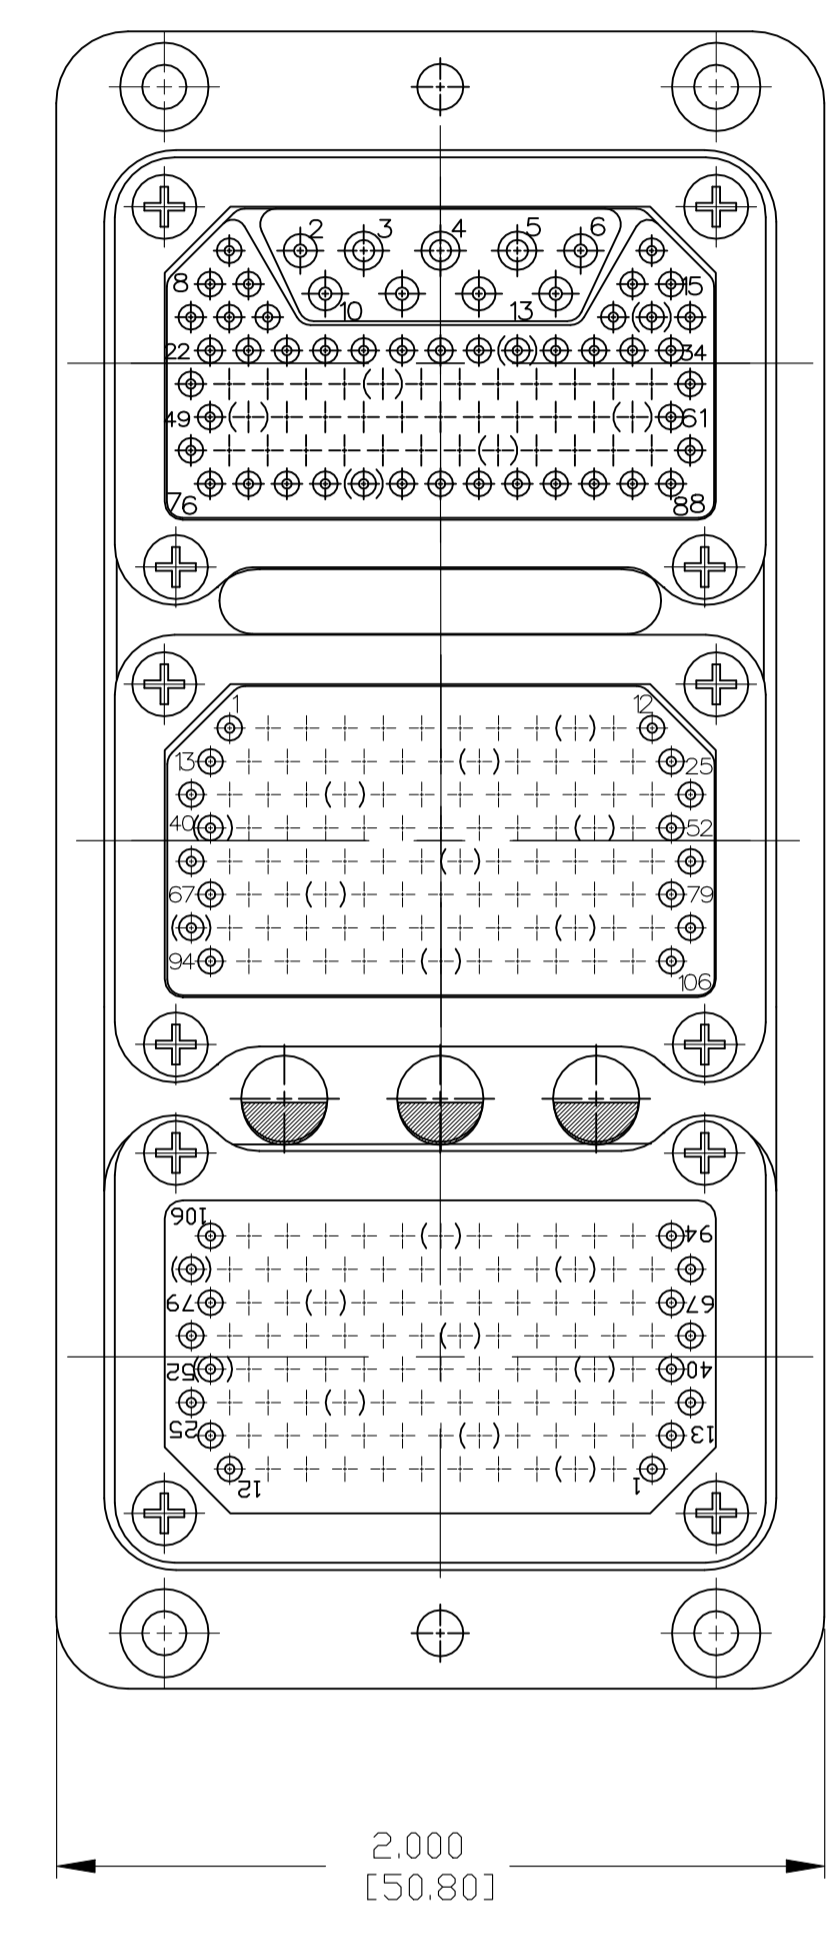
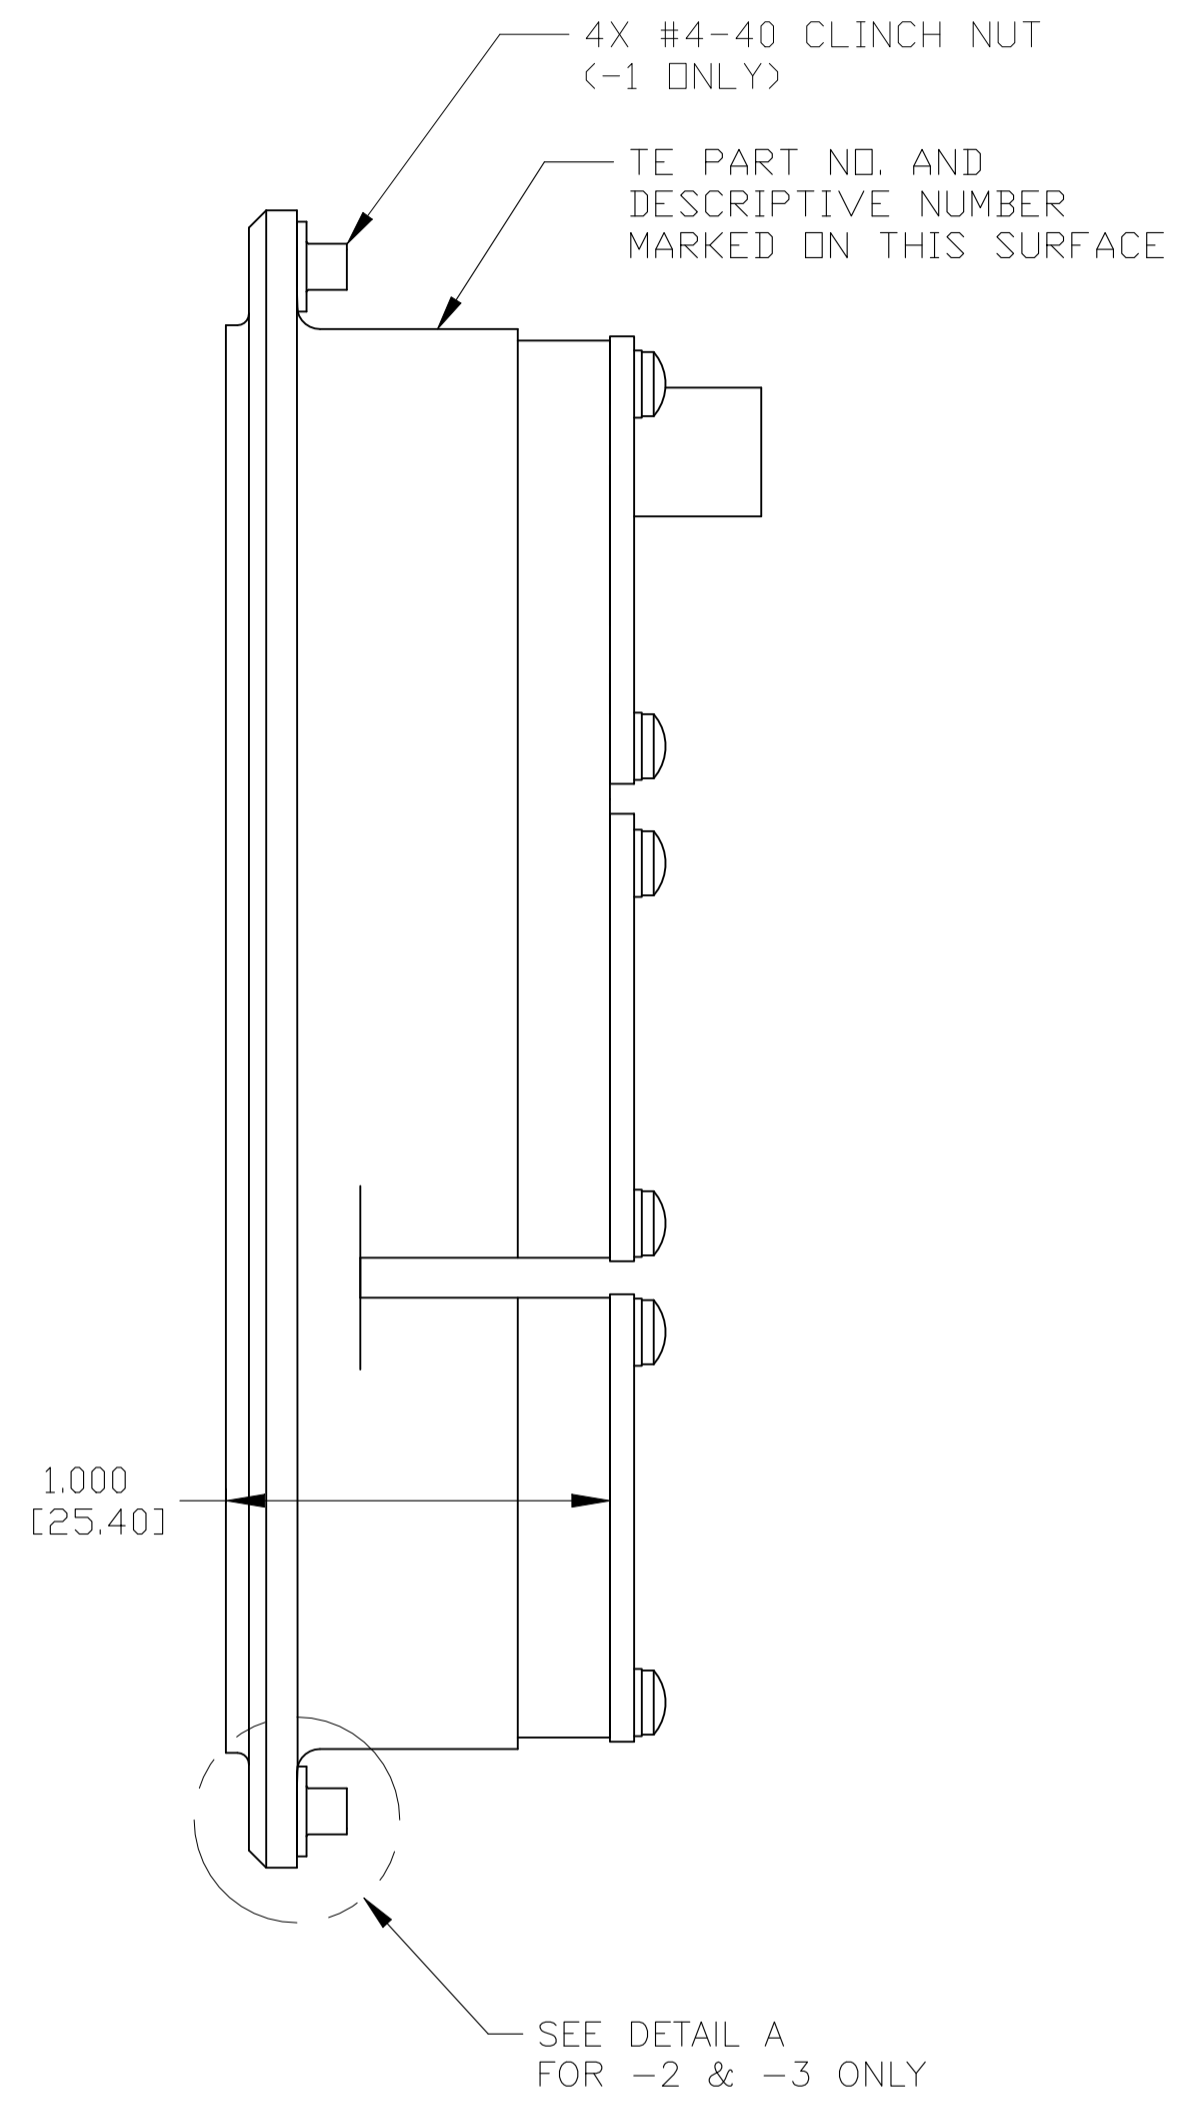


REVISIONS				
P	LTR	DESCRIPTION	DATE	APPV
B		REV PER ECO 20-007007	2-12-20	CT RL

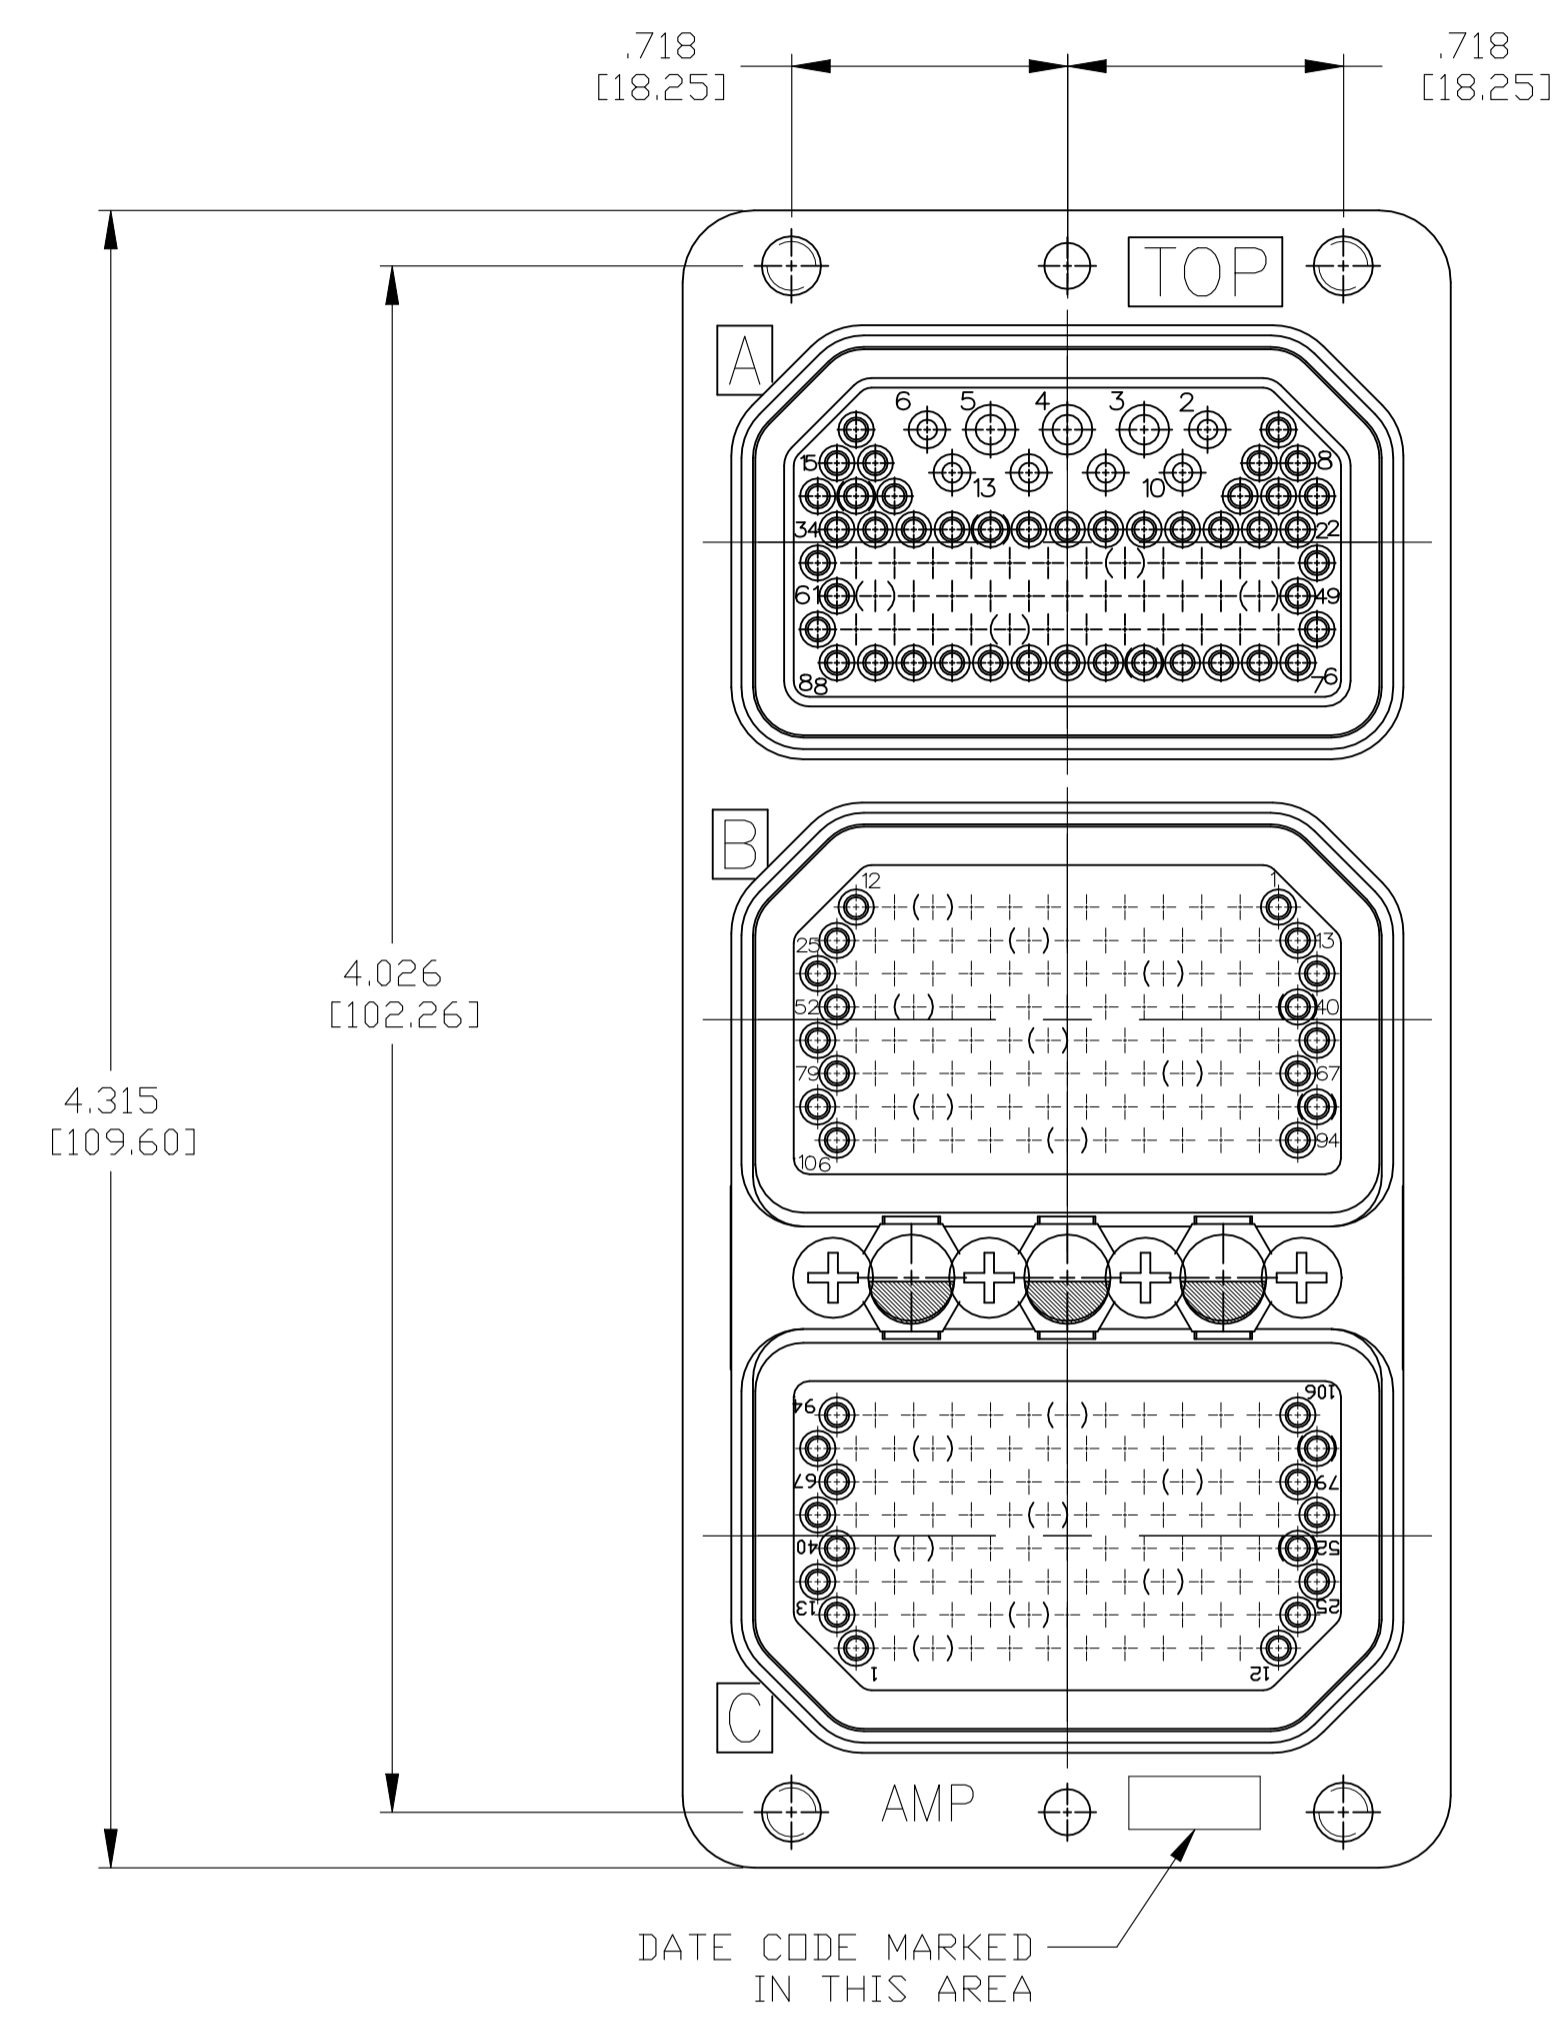

1 MATERIAL AND FINISH:
 SHELL: DIE CAST ALUMINUM PER FED. SPEC QQ-A-591 OR
 ASTM B211 6061-T6/6511 OR ASTM B209 2024-T4/T351
 STANDARD FINISH: CADMIUM PLATE PER QQ-P-416, TYPE 1,
 CLASS 2 YELLOW CHROMATE CONVERSION.
 INSERT RETENTION PLATE: ALUMINUM ALLOY, BLUE ANODIZE
 PER MIL-A-8625.
 SCREWS AND WASHERS: STAINLESS STEEL, PASSIVATED.
 POLARIZING POSTS: STAINLESS STEEL, PASSIVATED.
 POLARIZING NUTS: BRASS, CADMIUM PLATED.

2 KEYING TO BE ASSEMBLED PER LAST 2 DIGITS OF DESCRIPTIVE

PART NO.	DESCRIPTIVE NO.	KEYING
1996220-1	RM3R88P106P106P-0101 (201)	"01"
1996220-2	RM3R88P106P106P-3301 (201)	"01"
1996220-3	RM3R88P106P106P-3304 (201)	"04"

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN C.C.THOMAS 11-2-18	APPROVED R.LACUESTA 11-2-18	TE Connectivity
0. PLC ± -	1. PLC ± -	CHK R.LACUESTA 11-2-18	NAME RCPT ASSY,ARINC 404	
2. PLC ± -	3. PLC ± .010 [0.25]	PRODUCT SPEC		
4. PLC ± -	ANGLES ± -	APPLICATION SPEC		
MATERIAL	FINISH	WEIGHT 0.000000	SIZE A1	RESTRICTED TO
		00779	DRAWING NO. C=1996220	
		CUSTOMER DRAWING	SCALE 2:1	SHEET 1 of 1 REV B