DIGI

HIGH PERFORMANCE EMBEDDED DEVICE SERVERS

MINICORE[®] RCM6700 SERIES

An easily scalable cloud-computing infrastructure, extending remote device control and management with tremendous savings in development cost

The ultra-compact MiniCore RCM6700 is ideal for today's smart energy initiatives as well as other applications that require a cost effective web-enabled device server. The RCM6700 series provides up to 6 serial ports, configurable I/O and control features such as PWM. Furthermore, the RCM 6700 series offers a much greater feature set then comparable device servers, while at a lower cost.

The RCM6700 series is fully programmable, taking advantage of processor peripherals. The programming environment, Dynamic C, is an ANSI C compatible development environment that provides a royalty free TCP/IP stack and Wi-Fi support. Various protocol support such as ZigBee, Modbus and BACnet are also available to help reduce development costs and time-to-market.

In additon to proccessor and protocol support, Dynamic C supports the Digi Device CloudSM platform. Device Cloud simplifies device deployment by allowing devices to easily pass through firewalls, eliminating server maintainance and costly on-site visits. The Device Cloud platform also supports remote firmware updates and data storage for greater device control and monitoring.

BENEFITS

- Rabbit[®] 6000 running up to 200 MHz
- 10/100 Ethernet and pin-compatible with MiniCore 802.11b/g wireless modules
- 1 MB of internal RAM for program storage
- Up to 4 MB of serial Flash for data logging or web page storage
- Digi Device Cloud platform provides cost-effective cloud computing for remote device management
- Seamless migration to chip level design
- 5X greater throughput performance

RELATED PRODUCTS












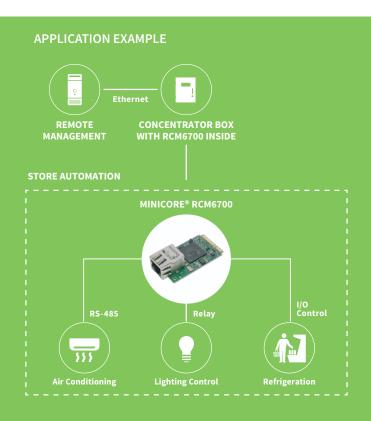

Rabbit MiniCore® RCM6600W

Core® RabbitCore 3000 RCM3700

Dynamic C®

ConnectCo <u>6 SBC</u>

SOFTWARE

The Dynamic C[®] integrated development environment reduces the time and effort to write real-time software for embedded systems that use a Rabbit microprocessor, enabling easy development of a wide range of applications.

Rabbit products and Dynamic C integrate editing, compiling, linking, loading and debugging into a single development environment as one function. There are no compatibility issues when moving from one stage to another. Once the design is complete, you can debug it on the target hardware and see how your code works. Because it is a dialect of C, the Dynamic C language has all the statements and constructions of traditional C, plus extensions that make it easier to write reliable, real-time multi-tasking software. The Dynamic C integrated development environment allows for easy hardware migration, moving from a single-board computer to chip level production.

Dynamic C also includes highly useful software components that can add functionality and value to your applications. This functionality includes web server capability, filing system, remote firmware updates, and wired and wireless security. Compatible software components are listed below.

SOFTWARE COMPONENTS

	COMPONENT	DESCRIPTION
	RABBITWEB	System of HTML tags used to easily create web interfaces to monitor and control embedded applications
	REMOTE PROGRAM UPDATE (RPU)	Allows for remote firmware updates from anywhere in the world using an Internet connection
0	FILE ALLOCATION TABLE (FAT)	Popular network-accessible file system for flashed based memories
î	SECURE SOCKETS LAYER (SSL) / TRANSPORT LAYER SECURITY (TLS)	The industry standard for web security in embedded applications
	ADVANCED ENCRYPTION STANDARD (AES)	128-bit encryption for transferring sensitive data

RABBITCORE® RCM6700 DEVELOPMENT KITS



THE RCM6700 STANDARD DEVELOPMENT KIT CONTENTS:

- RCM6700 module
- Interface board with standoffs/connectors
- Prototyping board with standoffs/connectors
- USB cable to program RCM5700 via interface board
- Dynamic C, including product documentation on disk
- Getting Started instructions
- Registration card



THE RCM6700 DELUXE DEVELOPMENT KIT CONTENTS: Includes everything in the Standard Development Kit, plus the following items:

- Universal AC adapter, 5VDC, 2 A (includes Canada/Japan/ U.S., Australia/N.Z., U.K., and European style plugs)
 Development Kits sold in North America may contain an AC adapter with only a North American style plug
- Digital I/O and serial communication accessory boards for use with certain sample programs
- CAT 5/6 Ethernet cable and DB-9 to 10-pin header serial cable
- Rabbit 5000 Processor Easy Reference poster

