


NOTES:

20-921-2300-00

Materials: SST. corrosion-resistant, 303, per ASTM A582.
 Beryllium Copper per ASTM-B-196.
 PTFE Fluorocarbon per ASTM-D-1710
 Oxide-Noryl (tm), MIL-P-46129

Finish: Center Conductors and solder components shall be gold plated per MIL-G-45204
 Type II, Class 1 over Nickel plate per QQ-N-290.
 Body and Body components shall be passivated per ASTM A380.

VSWR/Frequency: 1.3:1 MAX. TO 27GHz

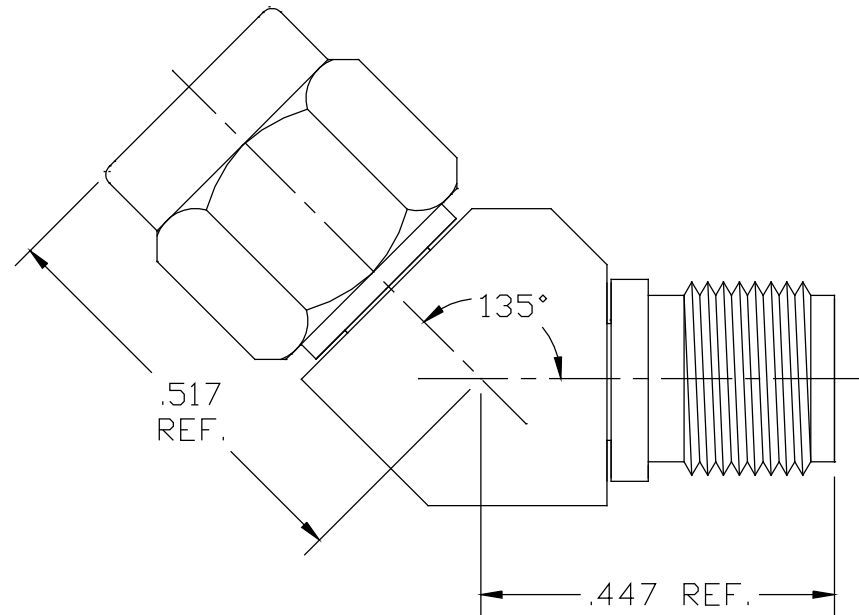

LTR	DESCRIPTION	DATE	APPR.	DRAWN DRP	CHECKED	USED ON	C:\Users\jvankirk\Desktop\logo.jpg		WENCHESTER RF 3950 DOW RD. MELBOURNE, FL. 32934			
-	REL	8/10		APPR.	SCALE	20-921-2300-00						
A	ECN#2368	07/17		UNLESS OTHERWISE SPECIFIED: 1. REMOVE ALL BURRS 2. BREAK ALL CORNERS & EDGES .005 R. MAX 3. CHAMFER 1st & LAST THREADS 45° 4. SURFACE FINISHED 32/ UNLESS OTHERWISE SPECIFIED. 5. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN .002 T.I.R. 6. ALL DIMENSIONS ARE AFTER PLATING.			MATERIAL			TITLE SMA PLUG TO SMA JACK 45°		
B	ECN#2565	5/1/18					FINISH					
							SIZE				FSCM NO.	SHEET
							DIMENSIONS ARE IN INCHES TOLERANCES			A	1	20-921-2300-00
							DECIMALS	FRACTIONAL	ANGULAR			
							.X ±.030 .XX ±.010 .XXX +.005	± 1/64	.X° ±1°0' .X°X' ±15'			