

CABLE ASSEMBLY CONFIGURATIONS / Configurations standards


Part number	Operating frequency	Connectors	Length	Attenuation-Nom @Max F(GHz)	VSWR-Nom @Max F(GHz)
2001441440610TF	DC - 50 GHz	2.4 mm male / 2.4 mm male	24 in.	4.09 dB	1.33
2001441450610TF	DC - 50 GHz	2.4 mm male / 2.4 mm female	24 in.	4.09 dB	1.33
2001441440914TF	DC - 50 GHz	2.4 mm male / 2.4 mm male	36 in.	5.87 dB	1.33
2001441450914TF	DC - 50 GHz	2.4 mm male / 2.4 mm female	36 in.	5.87 dB	1.33
2001441441220TF	DC - 50 GHz	2.4 mm male / 2.4 mm male	48 in.	7.66 dB	1.33
2001441451220TF	DC - 50 GHz	2.4 mm male / 2.4 mm female	48 in.	7.66 dB	1.33
2001441441524TF	DC - 50 GHz	2.4 mm male / 2.4 mm male	60 in.	9.45 dB	1.33
2001441451524TF	DC - 50 GHz	2.4 mm male / 2.4 mm female	60 in.	9.45 dB	1.33
TBD	DC - 67 GHz	1.85 mm male / 1.85 mm male	24 in.	4.80 dB	1.40
TBD	DC - 67 GHz	1.85 mm male / 1.85 mm female	24 in.	4.80 dB	1.40
TBD	DC - 67 GHz	1.85 mm male / 1.85 mm male	36 in.	6.92 dB	1.40
TBD	DC - 67 GHz	1.85 mm male / 1.85 mm female	36 in.	6.92 dB	1.40
TBD	DC - 67 GHz	1.85 mm male / 1.85 mm male	48 in.	9.04 dB	1.40
TBD	DC - 67 GHz	1.85 mm male / 1.85 mm female	48 in.	9.04 dB	1.40
TBD	DC - 67 GHz	1.85 mm male / 1.85 mm male	60 in.	11.16 dB	1.40
TBD	DC - 67 GHz	1.85 mm male / 1.85 mm female	60 in.	11.16 dB	1.40

Custom length and connector configuration upon request.

All TestPro cable assemblies are delivered in individual packaging with attached test report.

1.85 mm connectors available 2015

TESTPRO 3 (36in.) TYPICAL VSWR / VSWR Typique

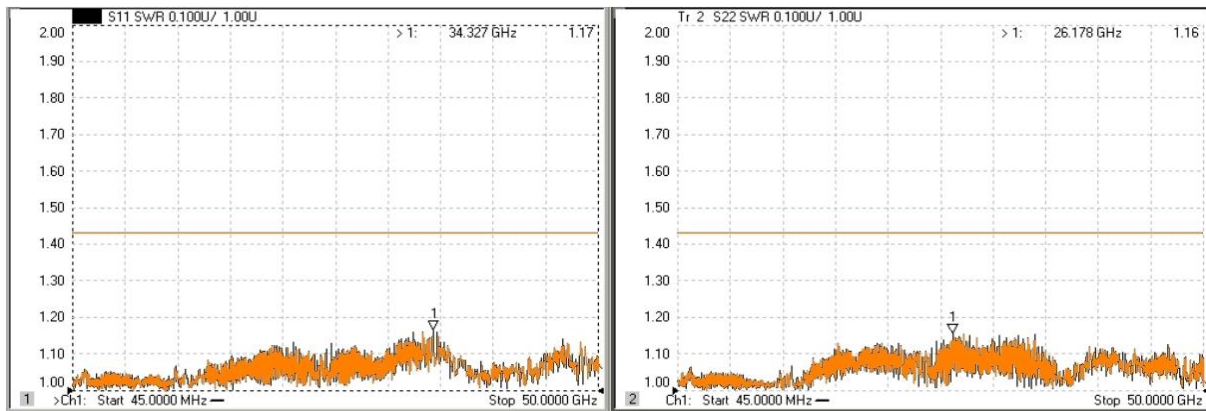

TESTPRO 2 (36in.) TYPICAL INSERTION LOSS / Pertes d'insertion typiques

