

## Features

- Through-hole or cassette mount
- Low capacitance and insertion loss
- High surge current rating
- Fast response to transients
- Compact “mini” size
- RoHS compliant\* version available

## 2039-xxx-XX Precision, Fast Responding, High Voltage Gas Discharge Tube

Bourns now offers miniature through-hole 2-electrode GDT surge protectors with sparkover voltage up to 1100 V. At only 5 mm in diameter, the 2039 Series is ideal for board level protection of high bandwidth applications such as xDSL, cable broadband and high speed Ethernet. The 2039 Series features high energy-handling capability, long and stable life performance and low capacitance of less than 1 pF.

Bourns® GDTs are designed to prevent damage from transient disturbances within rated limits by acting as a “crowbar” to create a short-to-ground circuit during conduction. When an electrical surge exceeds the defined breakdown voltage level of the GDT, the device becomes ionized and rapid conduction takes place. When the surge passes and system voltage returns to normal levels, the GDT returns to its high-impedance (off) state.

### Characteristics


Test Methods per ITU-T K.12, IEEE C62.31 and IEC 61643-311 GDT standards.

Characteristic	Model No.	
	2039-80	2039-110
DC Sparkover $\pm 20\%$ @ 100 V/s	800 V	1100 V
Impulse Sparkover <sup>(1)</sup> @ 1000 V/ $\mu$ s	1250 V	1500 V

<sup>(1)</sup> Impulse Sparkover voltage is defined as typical values of distribution.

Insulation Resistance (IR) .....	100 V .....	> 10 <sup>9</sup> $\Omega$
Arc Voltage .....	1 A .....	~ 10 V
Glow-Arc Transition Current .....		< 0.5 A
Capacitance .....	1 MHz .....	< 1 pF
DC Holdover Voltage <sup>(2)</sup> .....	135 V .....	< 150 ms
Max. Single Discharge <sup>(3)</sup> .....	5 kA .....	> 1 operation
Impulse Discharge Current .....	2.5 kA, 8/20 $\mu$ s <sup>(3)</sup> .....	> 10 operations
	100 A, 10/1000 $\mu$ s .....	> 100 operations
	10 A, 10/1000 $\mu$ s .....	> 1500 operations
Alternating Discharge Current .....	2.5 Arms, 1 s .....	> 10 operations
Operating and Storage Temperature .....		-55 to +85 °C
Climatic Category (IEC 60068-1) .....		40/90/21

#### Notes:

- UL Recognized  file E313168 (UL 1449).
- Sparkover limits after life +30/-25 %, IR >10<sup>8</sup>  $\Omega$ .
- At delivery AQL 0.65 Level II, DIN ISO 2859.

<sup>(2)</sup> Network applied.

<sup>(3)</sup> DC Sparkover may exceed +30/-25 % but will continue to protect without venting.



**WARNING Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)**


\*RoHS Directive 2015/863, Mar 31, 2015 and Annex.

Specifications are subject to change without notice.


Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at [www.bourns.com/docs/legal/disclaimer.pdf](http://www.bourns.com/docs/legal/disclaimer.pdf).


**Product Dimensions**

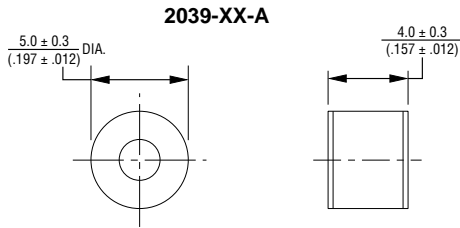

**2039-XX-A**

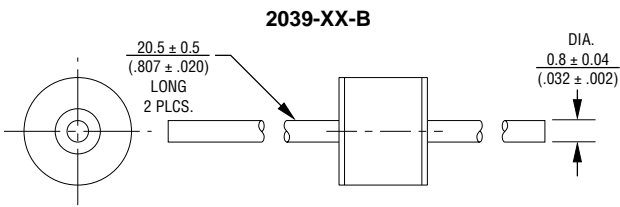

**2039-XX-B**

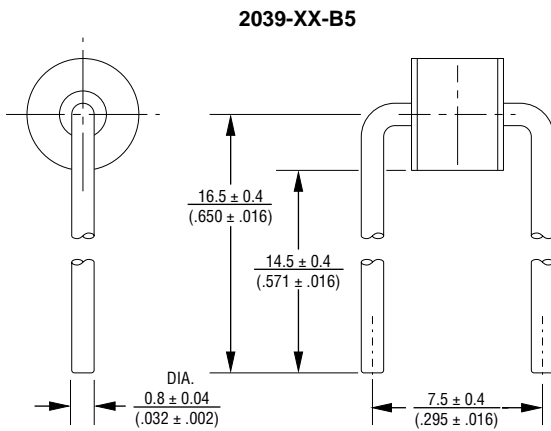


**2039-XX-B5**

2039-xx-B5 not available in reel pack

DIMENSIONS:  $\frac{\text{MM}}{\text{(INCHES)}}$

**Packaging Specifications**

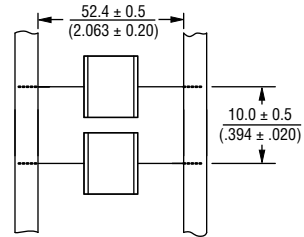

Model	Standard Packaging Quantity			
	Bulk (Bag)	Tray	Box	Reel
2039-XX-A	250		1000	
2039-XX-B	100		700	
2039-XX-B5	250		1000	
2039-XX-BT1				1000

**How to Order**

