




## Features

- Leadless, surface mount for economical assembly
- Compact mini-size
- Low capacitance and insertion loss
- RoHS compliant\*
-  UL Recognized

## 2055 Series Gas Discharge Tube Surge Protector

Bourns offers a low-cost surface mount (SM) 2-electrode GDT surge protection device. The 2055 Series is ideal for broadband protection due to its ultra-low capacitance. The 2055 Series offers superior protection characteristics suitable for telecommunications, commercial and industrial applications.

### Characteristics

Test Methods per ITU-T (CCITT) K.12 and IEEE C62.31

Characteristic	Model No.				
	2055-07	2055-09	2055-23	2055-25	2055-30
DC Sparkover $\pm 20\%$ @ 100 V/s	75 V	90 V	230 V	250 V	300 V
Impulse Sparkover <sup>(1)</sup>					
100V/ $\mu$ s	600 V	600 V	450 V	450 V	500 V
1000V/ $\mu$ s	700 V	700 V	550 V	550 V	600 V

Characteristic	Model No.			
	2055-35	2055-40	2055-60	2055-80
DC Sparkover $\pm 20\%$ @ 100 V/s	350 V	400 V	600 V	800 V
Impulse Sparkover <sup>(1)</sup>				
100V/ $\mu$ s	600 V	600 V	800 V	1000 V
1000V/ $\mu$ s	750 V	700 V	900 V	1200 V

<sup>(1)</sup> Impulse Sparkover voltage is defined as typical values of distribution.

Insulation Resistance (IR) .....	50V / 100 V <sup>(2)</sup> .....	> 10 <sup>10</sup> $\Omega$
Glow Voltage .....	10 mA .....	~ 80 V
Arc Voltage .....	>2 A .....	~ 12 V
Glow-Arc Transition Current .....		< 1 A
Capacitance.....	1 MHz .....	1.0 pF maximum
DC Holdover Voltage <sup>(3)</sup> .....	>150 V .....	< 150 ms
Impulse Discharge Current.....	5000 A, 8/20 $\mu$ s .....	10 operations
	100 A, 10/1000 $\mu$ s .....	> 300 operations
	10 A, 10/1000 $\mu$ s .....	> 1500 operations
Alternating Discharge Current .....	10 Arms, 9 cycles .....	1 operation min.
	2.5 Arms, 1 sec, 50 Hz .....	10 operations
Operating Temperature.....		-40 to +85 °C
Moisture Sensitivity Level .....		1
ESD Classification (HBM).....		6

#### Notes:

- UL Recognized component, UL File E153537.
- At delivery AQL 0.65 Level II, DIN ISO 2859.
- Surface Mount (SM) parts may show a temporary increase in DCBD after the solder reflow process. Most devices will recover within 24 hours time. It should be noted that there is no quality defect nor change in protection levels during the temporary change in DCBD.
- Bourns recommends reflowing surface mount devices per IPC/JEDEC J-STD-020 rev D.

<sup>(2)</sup> Insulation Resistance test conditions:

DC Sparkover Voltage	DC Measuring Voltage
75 - 150 V .....	50 V
$\geq 151$ V .....	100 V

<sup>(3)</sup> Network applied.



**WARNING Cancer and Reproductive Harm**  
[www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

\*RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011. Specifications are subject to change without notice.


Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific disclaimers as set forth on the last page of this document, and at [www.bourns.com/legal/disclaimer.pdf](http://www.bourns.com/legal/disclaimer.pdf).

# 2055 Series Gas Discharge Tube Surge Protector




## Product Dimensions

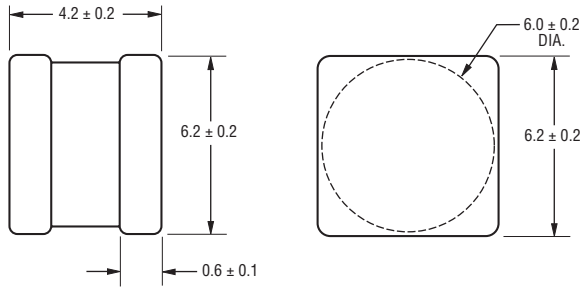


DIMENSIONS: MILLIMETERS

## Recommended Pad Layout

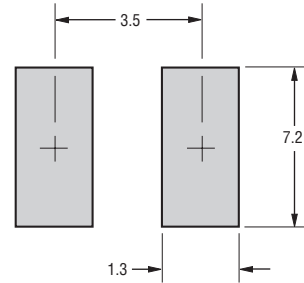


## Packaging Specifications

The Model 2055-xx-SM ships standard reelpack (-RP), 800 pieces per reel, 2,400 pieces per box. Reel is 330 mm in diameter and 16 mm wide.

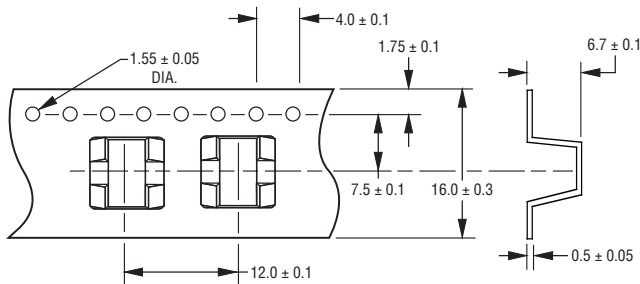

## How to Order

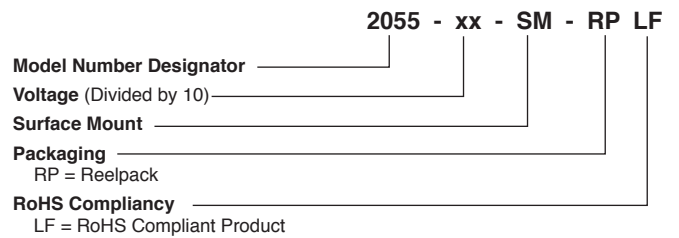

REV. N 02/20

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific disclaimers as set forth on the last page of this document, and at [www.bourns.com/legal/disclaimer.pdf](http://www.bourns.com/legal/disclaimer.pdf).