


GSD

2065-17-9

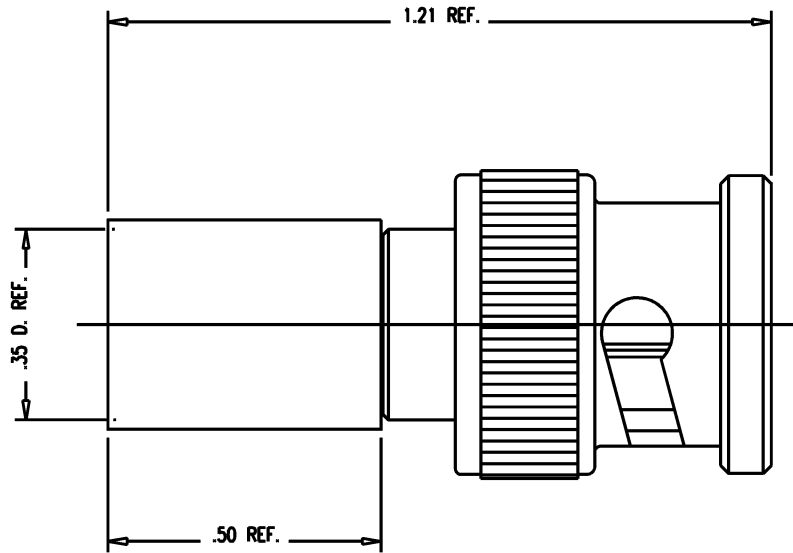

NOTES:

1. FOR USE WITH BELDEN 9231 CABLE.
2. FOR CABLING INSTRUCTIONS SEE 3-661-1.
3. FOR CRIMPING USE DIE KTH-2119.
4. INTERFACE PER MIL-STD-348, FIG. 301-1 (AS APPLICABLE).
5. SOLDER ONLY CENTER CONTACT 1-6123-1MC9 (SUPPLIED UNASSEMBLED).
6. MARK PACKAGE: KINGS 2065-17-9
7. MATERIAL:
 - INSULATOR- TEFLON, ASTM-D-1457
 - GASKET- SILICONE RUBBER, ZZ-R-765
 - K-GRIP SLEEVE- HARD DRAWN COMMERCIAL BRONZE, ALLOY 220
 - SPRING WASHER } BERYLLIUM COPPER, ASTM-B-196
 - OUTER CONTACT }
 - ALL OTHER METAL PARTS- BRASS, ASTM-B16
8. FINISHES:
 - SPRING WASHER- SILVER PLATED, PER QQ-S-365
 - CENTER CONTACT- GOLD PLATED, PER MIL-G-45204
 - ALL OTHER METAL PARTS- NICKEL PLATE PER QQ-N-290
9. ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE- 75 OHMS
 - WORKING VOLTAGE- 500 VRMS
 - FREQUENCY RANGE- DC TO 3 GHz

REVISIONS

ISSUE	CHANGES	
0	ER DCT	38174 1/8/01
1	CN DCT	38197 E 1/31/01
2	CN TML	38495 E 02/01/02

SCALE	4:1	
APPROX SURFACE AREA		
USED ON		
REF:	2025-52-29, ETR 1982	
PLUG, 75 BNC		
DRAWN	KH	DATE 09/19/90
DESIGN	JT	DATE 10/23/90
APPR.		DATE

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

2065-17-9

GSD