

NOTES: UNLESS OTHERWISE SPECIFIED  
 1. FOR GENERAL SERIES SPECIFICATIONS, SEE SDPRF-206.

2. MATERIAL SPECIFICATIONS:  
 BAYONET SLEEVE, BODY: BRASS PER ASTM B16  
 INSULATOR: TEFLON PER ASTM D1710  
 CONTACT, SPRING WASHER, OUTER CONTACT: BERYLLIUM COPPER, ASTM B196  
 GASKET: SILICONE RUBBER, A-A-59588



3. FINISH SPECIFICATIONS:  
 BAYONET SLEEVE, BODY: .000100MIN NICKEL PER AMS-QQ-N-290  
 OVER COPPER FLASH PER ASTM B734 (ROHS)  
 CONTACT: .000030 MIN. GOLD PER ASTM B488, OVER .000080 MIN NICKEL PER AMS-QQ-N-290 (ROHS)

ALL OTHER METAL PARTS: .000050 MIN NICKEL PER AMS-QQ-N290 OVER  
 .000050 MIN COPPER PER ASTM B734 (ROHS)

4. ELECTRICAL SPECIFICATIONS:  
 IMPEDANCE: 75 OHMS  
 FREQUENCY RANGE: DC TO 12 GHz  
 RETURN LOSS: -25 dB @ 6 GHz

5. COMPLIANT TO 3G/6G/12G-SDI SMPTE REQUIREMENTS.

REV	DESCRIPTION	BY DATE	APPD
C	ER064328	08/17/16 JF	VA

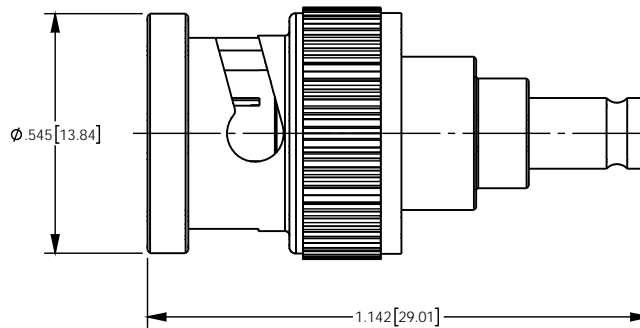

CATALOG P/N: 206H-034-00001N

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES (MM) TOLERANCES: DECIMAL: XX (X.X) ± .01 (0.3) .XXXX (X.XXX) ± .005 (0.13) .XXXX (X.XXX) ± .XXXX ANGLES: ± 2° SCALE: 3:1				 by WINCHESTER Winchester Electronics Corporation 62 Barnes Industrial Road North Wallingford, Connecticut 06492	
CUSTOMER SALES DRAWING			THIRD ANGLE	BNC MALE TO 1.0/2.3 FEMALE ADAPTOR(ROHS)	
DRAWN	DATE	APPROVED	DATE		
CCL	08/08/11	DG:m	08/15/11		
APPROVED	DATE	APPROVED	DATE		
xxx	XX/XX/XX	xxx	XX/XX/XX		
<b>A</b>				SD206H-034-00001N	SHT OF REV 1 1 C