


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION AUGUST, 2006.  
 © COPYRIGHT 2006 By - ALL RIGHTS RESERVED.

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
	A1	ECR-18-012908	15AUG2018	RZ RS

- NOTES:
- 1 PACK IN ACCORDANCE WITH TE SPEC 107-3275
  - 2 Ag PLATING: 200u"
  - 3 CuZnSn PLATING: 80u"
  - 4 ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED

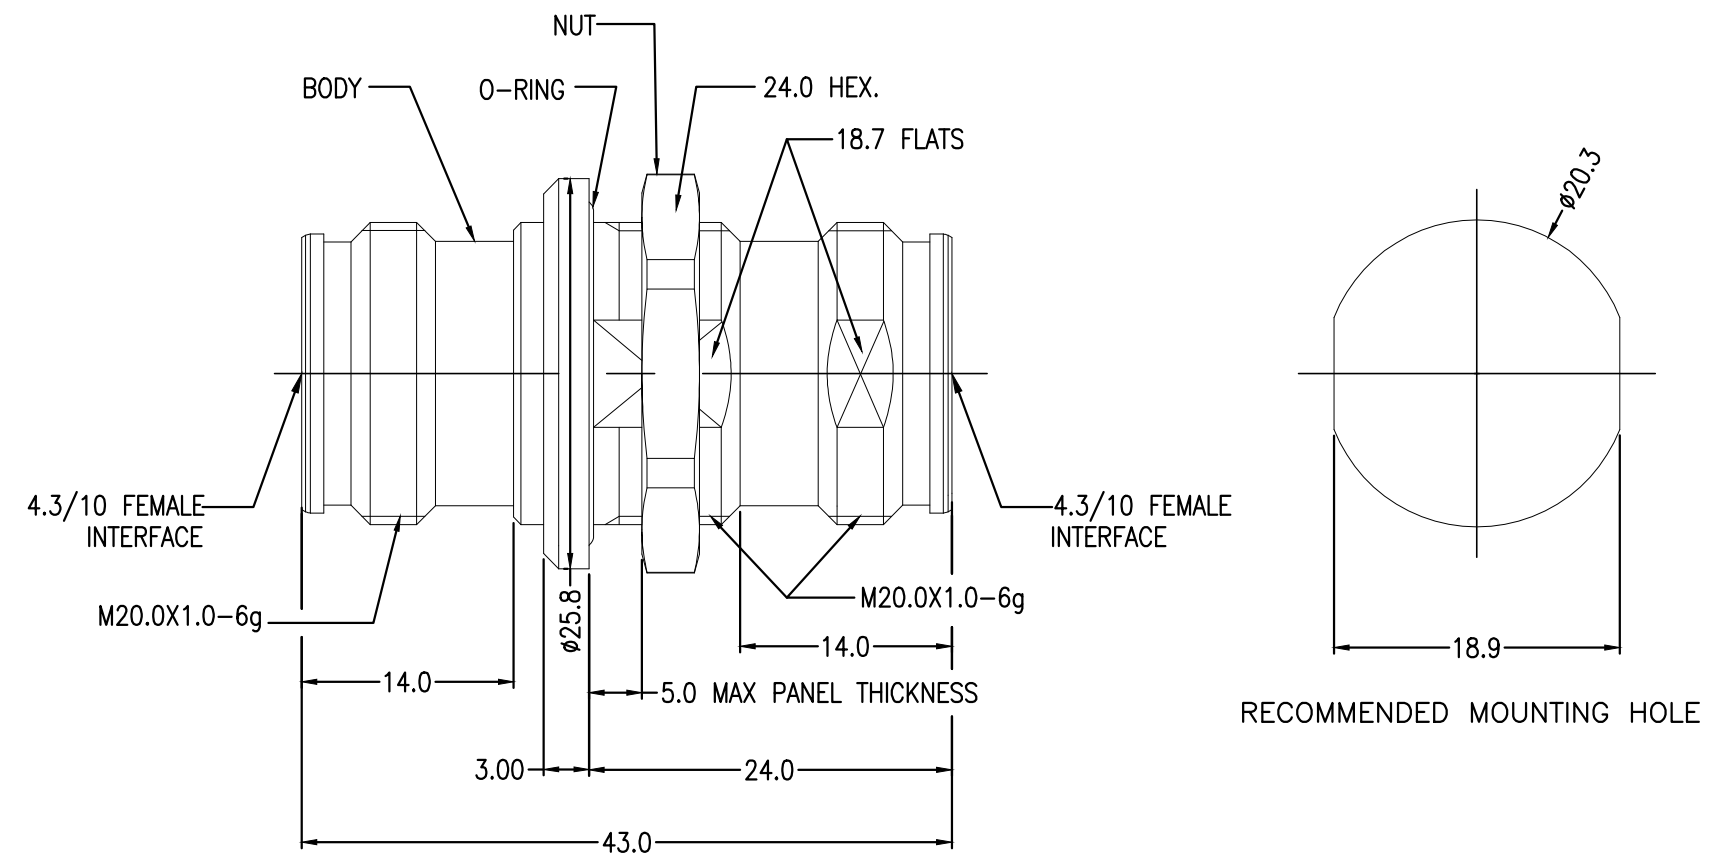

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Frequency Range (GHz) DC to 6GHz	Recommended Coupling Torque N/A	Temperature Rating -55°C TO +125°C
Voltage Rating (Peak) @ Sea Level 1000 V RMS	Mating cycles 500 cycles	
Insulation Resistance (MIN.) 5000 M ohms	Center contact retention force 6 lbs MIN	
Contact Resistance (Milliohms MAX) Center Contact 1.0 Outer Contact 1.0	VSWR: 1.20 Max @ DC-- 6 GHz	
Dielectric Withstand Voltage: 2500 V RMS Max	Power handling: 300W@2GHz @90°C	
Insertion Loss : 0.1*√F(GHz) dB	3rd Intermodulation: <-166dBc@2X43dBm 900MHz/1800MHz	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN ED 13JUN 2018
DIMENSIONS: mm		CHK BW 13JUN 2018
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD RS 13JUN 2018
0 PLC ± -		PRODUCT SPEC
1 PLC ± 0.2		
2 PLC ± 0.1		APPLICATION SPEC
3 PLC ± -		
4 PLC ± -		WEIGHT 0.000000
ANGLES ± -		CUSTOMER DRAWING
FINISH -		
MATERIAL SEE TABLE		

QUANTITY PER ASSY	MATERIAL	DESCRIPTION	ITEM
2	PE (TRANSPARENT)	DUST CAP	5
1	SILICONE	O-RING	4
1	PEEK	INSULATION	3
1	BEUC	CENTER CONTACT	2
1	BRASS	BODY/SHELL	1
-1			

**STE** TE Connectivity

NAME: ADAPTER  
4.3/10 Female to 4.3/10 Female Adapter

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-2081554	-

SCALE: 2:1 SHEET: 1 OF 1 REV: A1