




Features

- Size: 11.8 mm diameter, 17.5 mm length
- High power rating
- High voltage range
- RoHS compliant*
-  UL Recognized**

Applications

- Industrial equipment/electronics
- Telecommunications electronics

2097 Series High-Voltage 2-Electrode Gas Discharge Tube

Characteristics

Test Methods per ITU-T (CCITT) K.12 and IEC 61643-311.

Characteristic	Model No.					
	2097-100**	2097-120	2097-140	2097-160	2097-200	2097-220
DC Sparkover $\pm 20\%$ @ 100 V/s	1000 V	1200 V	1400 V	1600 V	2000 V	2200 V
Impulse Sparkover ⁽¹⁾						
100 V/ μ s	< 1500 V	< 1800 V	< 2000 V	< 2300 V	< 2600 V	< 2700 V
1000 V/ μ s	< 1700 V	< 2000 V	< 2200 V	< 2500 V	< 2700 V	< 2800 V

⁽¹⁾ Impulse Sparkover voltage is defined as typical values of distribution.

Insulation Resistance (IR) ⁽²⁾	500/1000 Vdc	> 10 G Ω
Glow Voltage	10 mA	~ 60 V
Arc Voltage	1 A	~ 15 V
Glow-Arc Transition Current		< 1 A
Capacitance	1 MHz	< 1.0 pF
Impulse Discharge Current	25,000 A, 8/20 μ s	1 operation
	20,000 A, 8/20 μ s	5 operations
Alternating Discharge Current	20 Arms, 50 Hz, 1 second	1 operation min.
	120 Arms, 50 Hz, 9 cycles	1 operation min.
Impulse Life	500 A, 10/1000 μ s	> 400 operations
Operating Temperature		-30 to +85 °C
Storage Temperature		-40 to +115 °C
Climatic Category (IEC 60068-1)		40 / 90 / 21

Notes:

⁽²⁾ Insulation Resistance measured at 1000 V for GDTs with >2000 V DCBD.

• At delivery AQL 0.65 Level II, DIN ISO 2859.

** UL Recognized components, UL File E313168. Model 2097-100 is not UL Recognized.

BOURNS®

Asia-Pacific: Tel: +886-2 2562-4117 • Email: asiacus@bourns.com

EMEA: Tel: +36 88 885 877 • Email: eurocus@bourns.com

The Americas: Tel: +1-951 781-5500 • Email: americus@bourns.com

www.bourns.com



WARNING Cancer and Reproductive Harm

www.P65Warnings.ca.gov


*RoHS Directive 2015/863, Mar 31, 2015 and Annex.

Specifications are subject to change without notice. Users should verify actual device performance in their specific applications. The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf

2097 Series High-Voltage 2-Electrode Gas Discharge Tube

BOURNS®


Product Dimensions

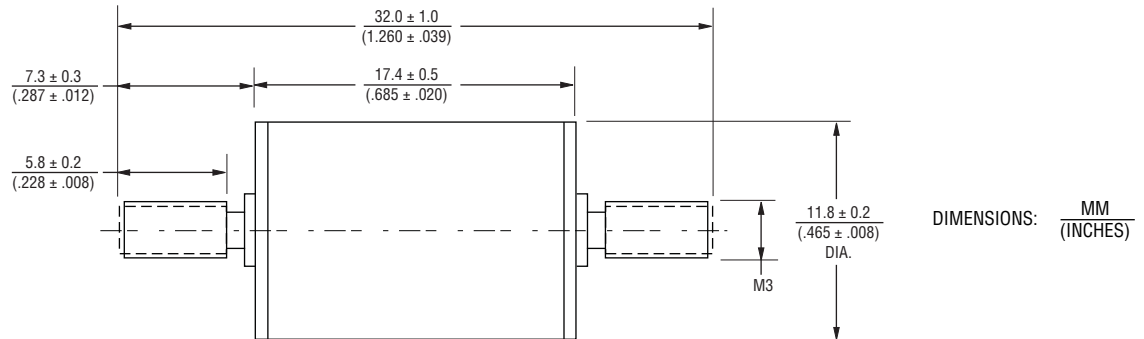

Packaging Specifications

Model 2097 ships standard bulk, 35 pcs. per tray; 3 trays per box (105 units).

How to Order

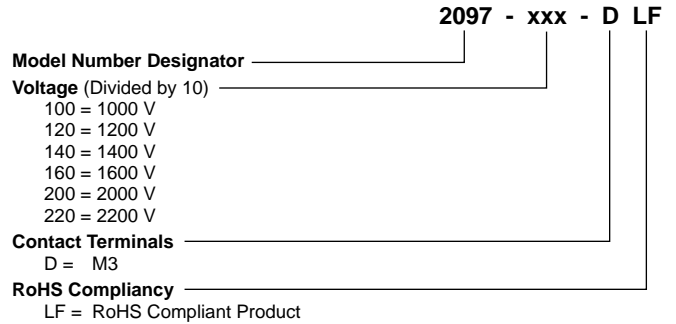

REV. E 09/19

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific disclaimers as set forth on the last page of this document, and at www.bourns.com/legal/disclaimer.pdf.