



698-960, 1710-2170 & 2300-2700 MHz LTE/CELL BAND ANTENNA

Standard Antenna Solutions

LTE, NB-IoT, LTE Cat-M, World band products

Part Number: 2108994-1

PRODUCT FACTS:

- Spherical omnidirectional
- Small and lightweight
- Available in tape & reel for automatic mounting
- RoHS compliant


RECOMMENDATIONS:

- Minimal matching circuits required
- Bandwidth and performance is dependent on ground plane size
- The following data is based on 140mm ground size in free space
- Ground plane is the top layer of the PCB


SPECIFICATIONS:

- Frequency Range: 698 - 960 MHz; 1710 - 2170 MHz, 2300 - 2700 MHz
- Peak Gain:
 - 0.7 dBi @ 710 MHz
 - 0.9 dBi @ 824 MHz
 - 1.1 dBi @ 925 MHz
 - 2.3 dBi @ 1755 MHz
 - 2.2 dBi @ 1880 MHz,
 - 0.7 dBi @ 2170 MHz
 - 1.3 dBi @ 2500 MHz
- VSWR: < 3.0
- Return loss: < -7.0 dB
- Polarization: Linear
- Power Handling: 3 Watt cw
- Size: 40.0 mm x 10.0 mm x 3.2 mm
- Weight: 2.5g
- Keep Out Area: See diagram on page 3
- Mounting: Surface-mount technology
- Operating Temperature: -40 to 85°C
- Storage Temperature: -40 to 85°C


VSWR:

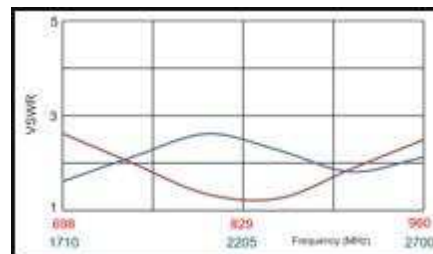


RETURN LOSS:

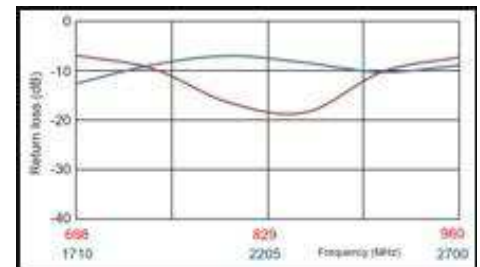


EFFICIENCY:




TEST ORIENTATION IN FREE SPACE:




AZIMUTH:

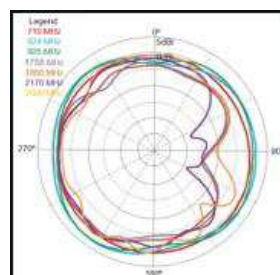

ELEVATION:



MOUNTING GUIDE:

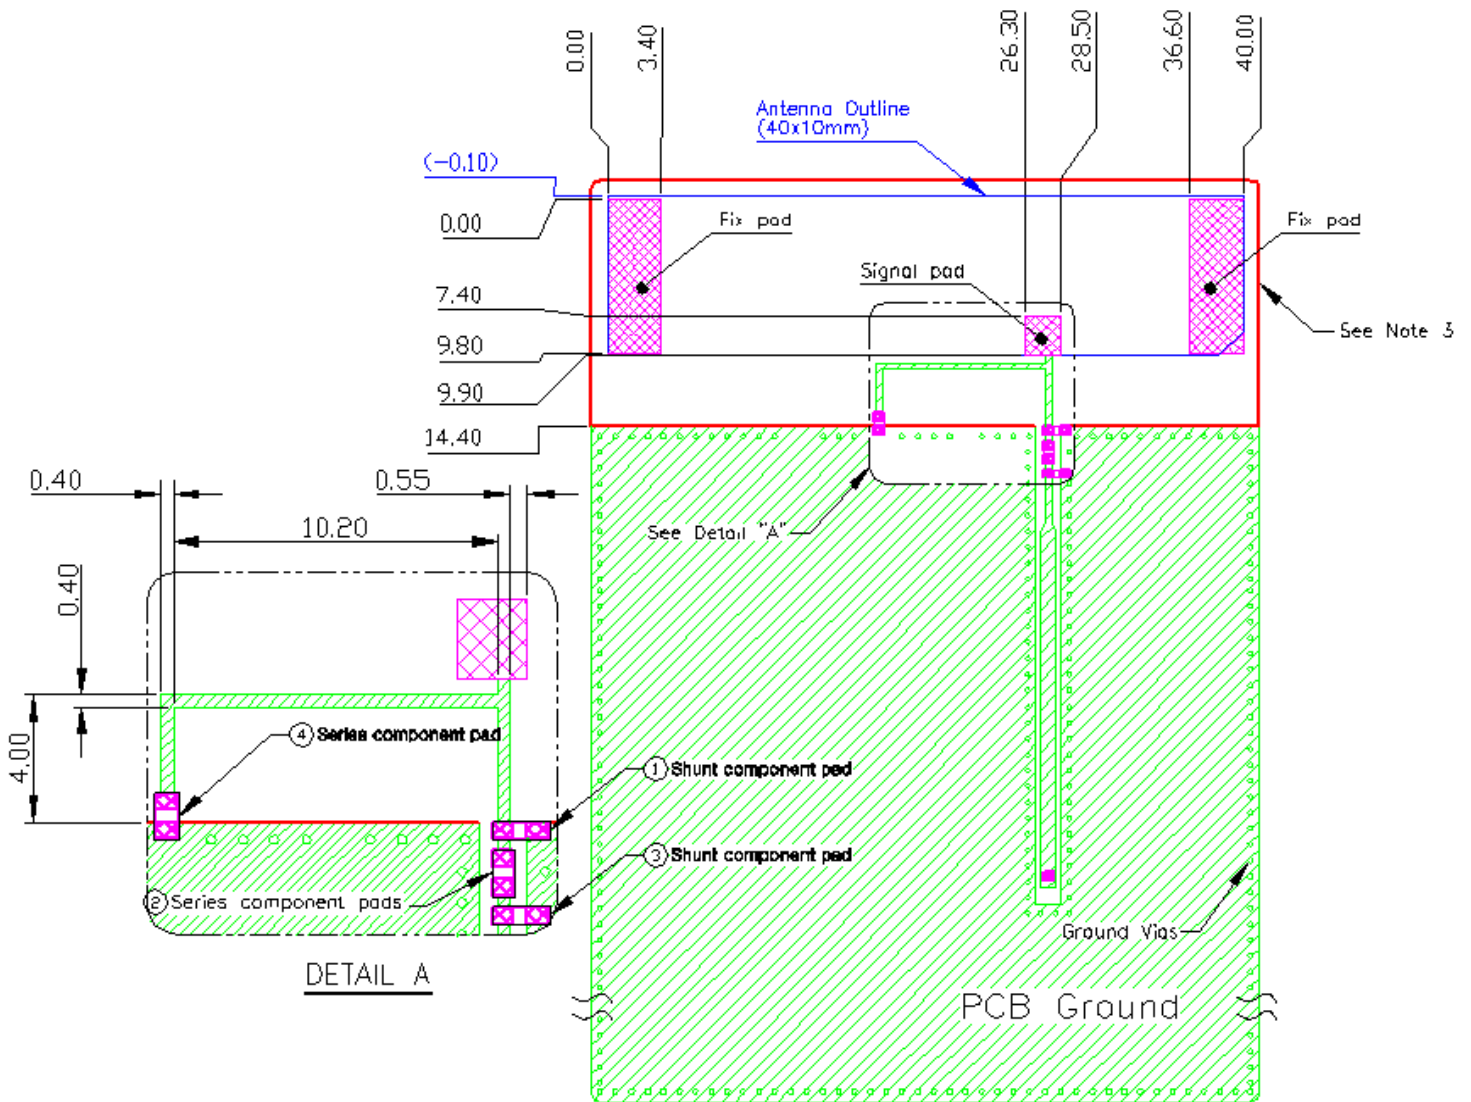

- NOTES: 1. Antenna must be mounted on the edge of PCB.
 2. NC = Non connection (mechanical mounting pads)
 3. No copper allowed in designated area on all PCB layer -
 4. For more information please call TE.
 5. Measured with below matching circuit condition.
 ①0.5pF, ②2.2nH, ③NC, ④22nH

Dimensions: mm
 Diagram is not to scale