

## DKT Series

Emerson Network Power Connectivity Solutions offers the Semflex DKT test cable assembly series. This line incorporates high performance cable with equally high performance connectors with cost effective pricing and good performance up to 26 GHz. These assemblies feature low loss triple shielded cable with a standard FEP Teflon® or optional stainless steel inter-linked armor tubing. The triple shielded construction of these cables give outstanding shielding effectiveness of greater than -90dB at 18GHz. These assemblies use precision stainless steel connectors with molded strain relief boots and are designed to meet both MIL-C-39012 and MIL-STD-348a. These cables feature low loss, good VSWR, and are affordably priced.



### Key Features & Benefits

- Precision stainless steel connectors
- Low loss PTFE tape Dielectric
- FEP outer jacket; optional stainless steel armored jacketing available
- Triple shielded for >-90 dB leakage at 18GHz


### Applications

- Test Equipment
- High temperature (+200° C)
- Low temperature(-65°C)

### Available Connectors

- SMA, TNC, N
- Straight and right angle male, straight female

## Cable Construction



1. Center conductor: Silver plated copper \*
  2. Dielectric: Microporous PTFE tape
  3. Outer conductor: Silver plated copper flat braid\*
  4. Shield interlayer: Metalized tape
  5. Braid: Silver plated copper round braid \*
  6. Jacket options: Extruded FEP, armor
- \* Silver plating per ASTM-B-298

## Additional Specifications

### Electricals

Velocity of Propagation	76.5%
RF Leakage Min. @ 18GHz	-90 dB/ft
Impedance	50 Nominal
Capacitance	27 pF/ft    88.58 pF/m
Delay	1.34 ns/ft    4.40 ns/m
Breakdown Voltage	>10kV

### Phase Stability vs. Flexure

### Mechanical/ Environmental

Nominal Diameter	0.205 inches    .521 cm
Minimum Bend Radius	1.0 inches    2.54 cm
Temperature	-65 °C to + 200°C
Weight	0.05 lb./ft    .074g/m


### Materials and Finishes Connector

Body	Stainless Steel
Nut	Stainless Steel
Gasket	Silicon Rubber
Contact	BeCu / Gold plated
Insulator	PTFE


### Materials and Finishes Cable

Cable Jacket	FEP
Outer Shield	Silver Copper
Inter Shield	Aluminum Polymer
Inter Conductor	Silver Copper
Dielectric	Micro-porous PTFE
Center Conductor	Silver Copper

DKT CABLE  
ATTENUATION vs FREQUENCY

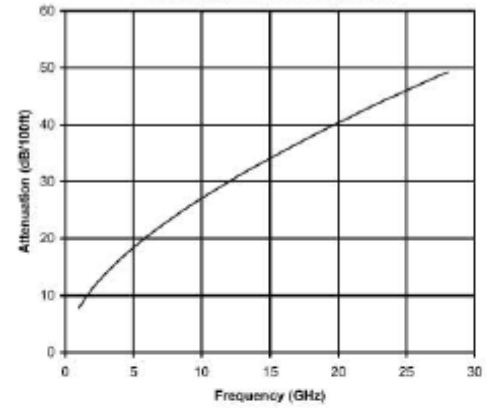

DKT CABLE  
CW POWER vs FREQUENCY  
Power levels listed in the graph are for sea level and 25°C

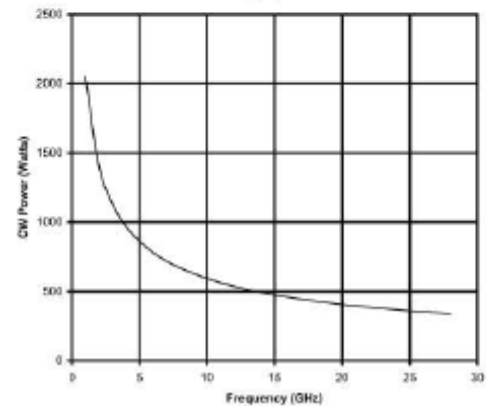

DKT Cable Assembly  
SMA Male Straight to SMA Male Straight  
HP190S Cable

## Connectivity Solutions

Whilst due care has been taken to ensure the contents of this data sheet are accurate, Emerson Network Power Connectivity Solutions cannot accept liability for any errors or omissions that may occur. We reserve the right to alter specifications of products without prior notice.